
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4 mm Diameter x 10 mm long

Supplier Part Number: OJCLASL4010BL

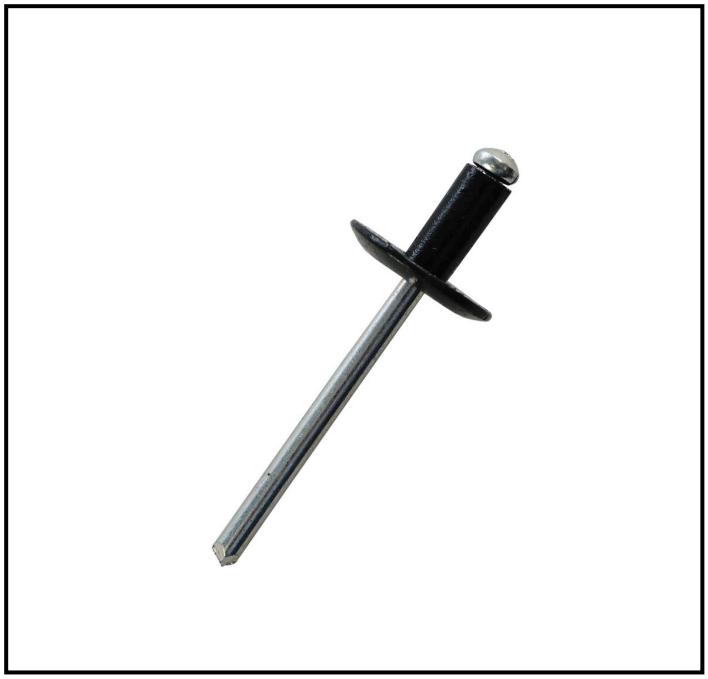

FEATURES

- **Aluminium Body:** Offers a lightweight yet strong fastening solution.
- **Steel Mandrel:** Provides additional strength and durability during installation.
- **Flange Head:** Ensures a larger surface area for improved load distribution.
- **Clear Trivalent Chromate Finish:** Provides enhanced corrosion resistance.
- **4 mm Rivet Diameter:** Suitable for a wide range of applications.
- **10 mm Rivet Length:** Accommodates materials with varying thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Aluminium Blind Rivets are designed for quick and reliable fastening in a variety of applications. These rivets are ideal for situations where access is only available from one side, providing a secure and durable joint. The aluminium body ensures a lightweight yet strong connection, making it suitable for both industrial and commercial use.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	6 mm
Minimum Grip	4 mm


Mechanical Specifications


Head Diameter	12 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	10 mm
Shear Strength	1180 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

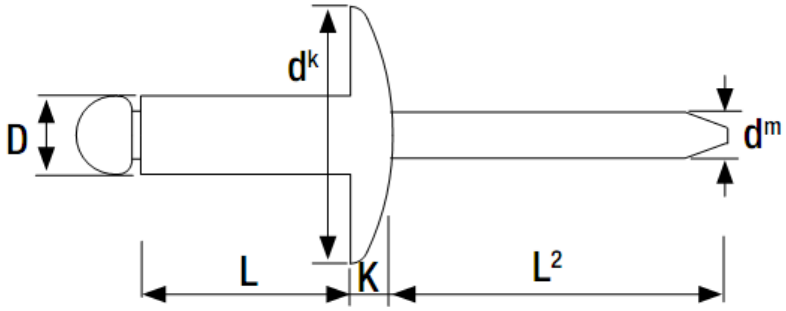



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	3.5	5.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	5.0	7.0	3.3	9.5	2.0	1.70	26.0	740	980	500
4.0	8.0	2.0	4.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	4.0	6.0	4.1	12.0	2.0	2.10	27.0	1180	1600	500
	12.0	6.0	8.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
	14.0	8.0	10.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
4.8	10.0	3.5	5.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	12.0	5.5	7.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	14.0	7.5	9.5	4.9	16.0	.	2.70	28.0	1540	2230	200
	16.0	9.0	11.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	18.0	11.0	13.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	20.0	13.0	15.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	24.0	17.0	19.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	26.0	19.5	21.0	4.9	16.0	.	2.70	28.0	1540	2230	150