
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 12 mm long

Supplier Part Number: OJCLASL481216BL

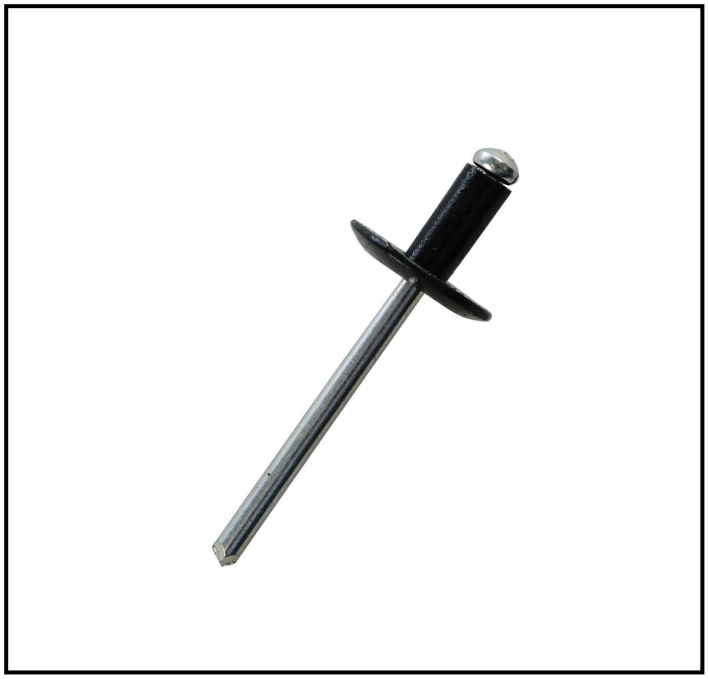

FEATURES

- **Rivet Body Material:** Aluminium for lightweight and corrosion-resistant performance
- **Mandrel Material:** Steel for enhanced strength and durability
- **Head Type:** Flange for increased load distribution
- **Finish:** Clear Trivalent Chromate Zinc for superior corrosion resistance
- **Rivet Diameter:** 4.8 mm for standardised applications
- **Rivet Length:** 12 mm suitable for a range of material thicknesses
- **Grip Range:** 5.5 mm to 7.5 mm for versatile use
- **Fixing Hole Diameter:** 4.9 mm for precise fitting
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality 4.8 mm Aluminium Blind Rivet designed for secure fastening in various industrial applications. This blind rivet is ideal for situations where access is only available from one side, providing a reliable and efficient solution for joining materials.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	7.5 mm
Minimum Grip	5.5 mm


Mechanical Specifications


Head Diameter	16 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	12 mm
Shear Strength	1540 N
Tensile Strength	2230 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

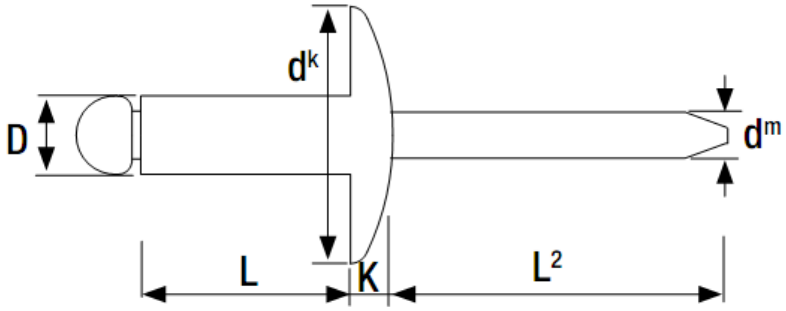



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	3.5	5.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	5.0	7.0	3.3	9.5	2.0	1.70	26.0	740	980	500
4.0	8.0	2.0	4.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	4.0	6.0	4.1	12.0	2.0	2.10	27.0	1180	1600	500
	12.0	6.0	8.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
	14.0	8.0	10.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
4.8	10.0	3.5	5.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	12.0	5.5	7.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	14.0	7.5	9.5	4.9	16.0	.	2.70	28.0	1540	2230	200
	16.0	9.0	11.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	18.0	11.0	13.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	20.0	13.0	15.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	24.0	17.0	19.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	26.0	19.5	21.0	4.9	16.0	.	2.70	28.0	1540	2230	150