
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 20 mm long

Supplier Part Number: OJCLASL482016BL

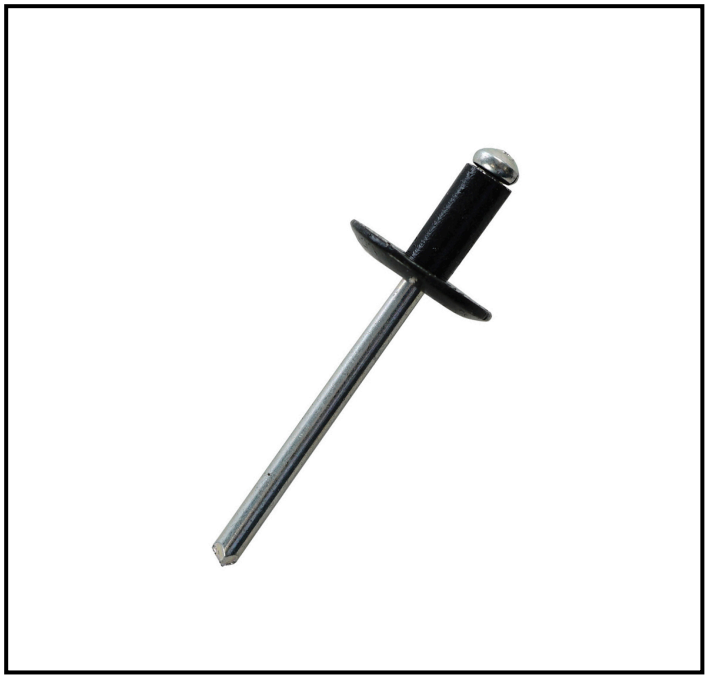

FEATURES

- **Rivet Body Material:** Aluminium construction ensures lightweight and corrosion resistance.
- **Mandrel Material:** Steel mandrel provides strength and durability during installation.
- **Rivet Diameter:** 4.8 mm diameter for compatibility with standard drilling sizes.
- **Rivet Length:** 20 mm length accommodates a range of material thicknesses.
- **Maximum Grip:** 15 mm grip range allows for versatile use in different applications.
- **Minimum Grip:** 13 mm grip range ensures secure fastening.
- **Head Type:** Flange head offers a larger bearing surface for increased load distribution.
- **Finish:** Clear trivalent chromate zinc finish provides additional corrosion protection.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality Aluminium Blind Rivet designed for secure fastening in various industrial applications. This rivet is ideal for situations where access is only available from one side, providing a reliable and efficient solution for joining materials.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	15 mm
Minimum Grip	13 mm


Mechanical Specifications


Head Diameter	16 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	20 mm
Shear Strength	1540 N
Tensile Strength	2230 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

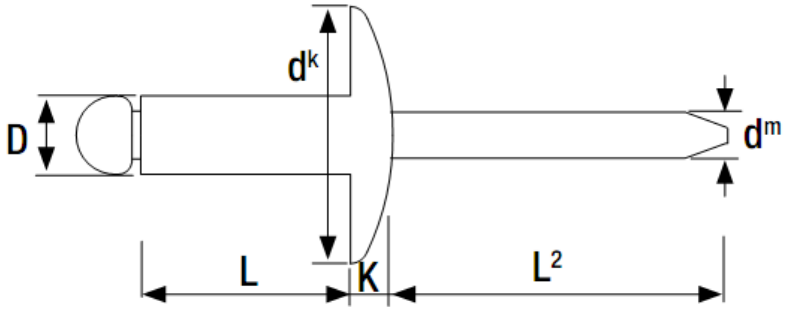



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	3.5	5.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	5.0	7.0	3.3	9.5	2.0	1.70	26.0	740	980	500
4.0	8.0	2.0	4.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	4.0	6.0	4.1	12.0	2.0	2.10	27.0	1180	1600	500
	12.0	6.0	8.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
	14.0	8.0	10.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
4.8	10.0	3.5	5.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	12.0	5.5	7.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	14.0	7.5	9.5	4.9	16.0	.	2.70	28.0	1540	2230	200
	16.0	9.0	11.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	18.0	11.0	13.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	20.0	13.0	15.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	24.0	17.0	19.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	26.0	19.5	21.0	4.9	16.0	.	2.70	28.0	1540	2230	150