
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 26 mm long

Supplier Part Number: OJCLASL482616BL

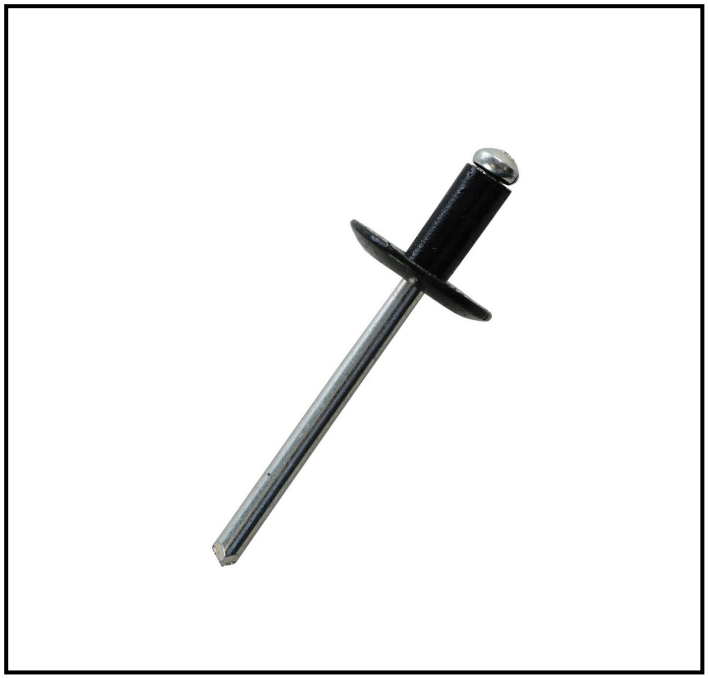

FEATURES

- **Aluminium Body:** Provides corrosion resistance and lightweight strength.
- **Steel Mandrel:** Ensures strong and secure fastening.
- **Flange Head:** Offers a larger bearing surface for increased load distribution.
- **Clear Trivalent Chromate Finish:** Enhances corrosion resistance and durability.
- **4.8 mm Diameter:** Suitable for a range of standard applications.
- **26 mm Length:** Accommodates materials with a grip range of 19.5 mm to 21 mm.
- **Compliance with DIN 7337:** Meets international standards for quality and performance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is only available from one side. With a robust aluminium body and steel mandrel, this rivet ensures reliable and durable connections, making it ideal for various industrial applications.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	21 mm
Minimum Grip	19.5 mm


Mechanical Specifications


Head Diameter	16 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	26 mm
Shear Strength	1540 N
Tensile Strength	2230 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

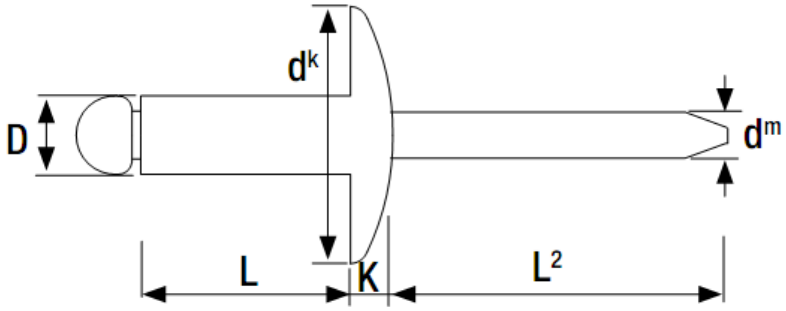



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	3.5	5.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	5.0	7.0	3.3	9.5	2.0	1.70	26.0	740	980	500
4.0	8.0	2.0	4.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	4.0	6.0	4.1	12.0	2.0	2.10	27.0	1180	1600	500
	12.0	6.0	8.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
	14.0	8.0	10.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
4.8	10.0	3.5	5.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	12.0	5.5	7.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	14.0	7.5	9.5	4.9	16.0	.	2.70	28.0	1540	2230	200
	16.0	9.0	11.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	18.0	11.0	13.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	20.0	13.0	15.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	24.0	17.0	19.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	26.0	19.5	21.0	4.9	16.0	.	2.70	28.0	1540	2230	150