
RS PRO Steel/Steel Dome Head Blind Rivet, 3 mm Diameter x 10 mm long

Supplier Part Number: OJSD3010

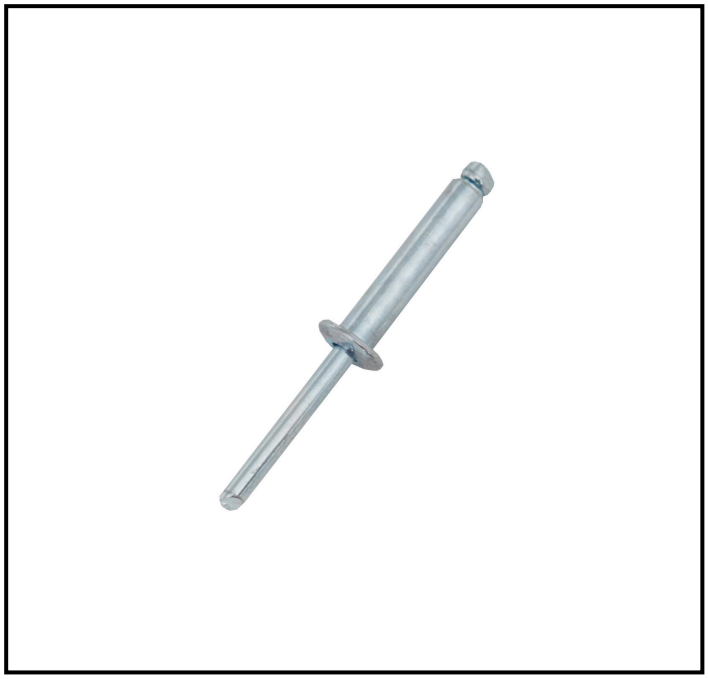

FEATURES

- **Steel Rivet Body:** Provides strength and durability for long-lasting performance.
- **Dome Head Type:** Offers a neat and smooth finish for aesthetic applications.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for extended service life.
- **3.1 mm Fixing Hole Diameter:** Ensures compatibility with standard drilling sizes.
- **5.5 mm to 7 mm Grip Range:** Suitable for a variety of material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Steel Blind Rivet is designed for secure fastening in various industrial applications. With a 3 mm diameter and 10 mm length, this rivet is ideal for joining materials where access is only available from one side. Its steel construction ensures durability and reliability in demanding environments.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.1 mm
Mandrel Material	Steel
Maximum Grip	7 mm
Minimum Grip	5.5 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Steel
Rivet Diameter	3 mm
Rivet Length	10 mm
Shear Strength	915 N
Tensile Strength	1125 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

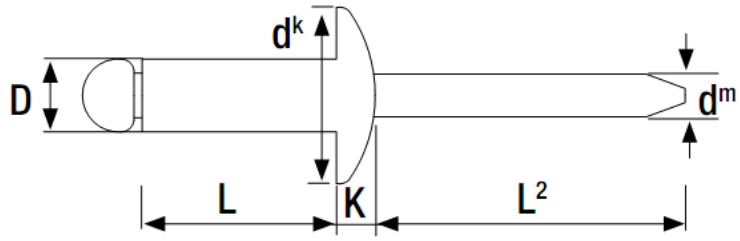



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.0	6.0	1.5	3.5	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	8.0	3.5	5.0	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	10.0	5.5	7.0	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	12.0	7.0	9.0	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	14.0	9.0	11.0	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	16.0	11.0	12.5	3.1	6.5	0.8	1.90	26.0	915	1125	750
	18.0	12.0	14.0	3.1	6.5	0.8	1.90	26.0	915	1125	750
	20.0	14.5	16.5	3.1	6.5	0.8	1.90	26.0	915	1125	500
3.2	6.0	1.5	3.0	3.3	6.5	0.8	2.00	26.0	1060	1285	1000
	8.0	3.0	5.0	3.3	6.5	0.8	2.00	26.0	1060	1285	1000
	10.0	5.0	7.0	3.3	6.5	0.8	2.00	26.0	1060	1285	1000
	12.0	7.0	9.0	3.3	6.5	0.8	2.00	26.0	1060	1285	750
	14.0	9.0	11.0	3.3	6.5	0.8	2.00	26.0	1060	1285	1000
	16.0	11.0	12.5	3.3	6.5	0.8	2.00	26.0	1060	1285	500
	18.0	13.0	14.5	3.3	6.5	0.8	2.00	26.0	1060	1285	500
	20.0	15.0	16.5	4.1	8.0	1.0	2.50	27.0	1550	1990	500
4.0	6.0	1.0	2.0	4.1	8.0	1.0	2.50	27.0	1550	1990	750
	8.0	2.0	4.0	4.1	8.0	1.0	2.50	27.0	1550	1990	750
	10.0	4.0	6.0	4.1	8.0	1.0	2.50	27.0	1550	1990	750
	12.0	6.0	8.0	4.1	8.0	1.0	2.50	27.0	1550	1990	500