
RS PRO Steel/Steel Dome Head Blind Rivet, 3.2 mm Diameter x 14 mm long

Supplier Part Number: OJSD3214

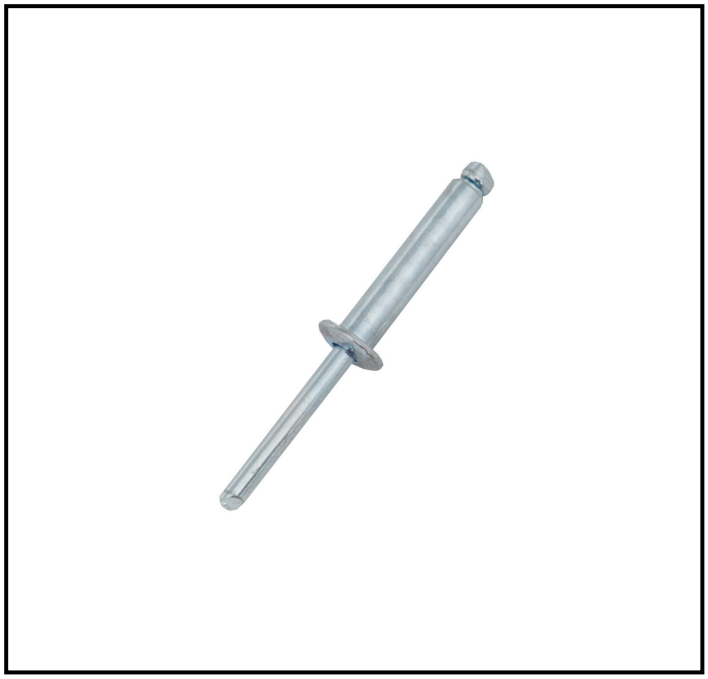

FEATURES

- **Rivet Diameter:** 3.2 mm for precise fastening
- **Rivet Length:** 14 mm suitable for a range of material thicknesses
- **Head Type:** Dome head for a smooth finish
- **Mandrel Material:** Steel for enhanced durability
- **Finish:** Clear trivalent chromate zinc for corrosion resistance
- **Maximum Grip:** 11 mm for versatile application
- **Minimum Grip:** 9 mm ensuring a secure fit

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 3.2 mm Blind Rivet is designed for secure fastening in various industrial applications. Made from durable steel, this rivet provides reliable performance in environments where strength and corrosion resistance are essential. Ideal for use in situations where access is only available from one side of the workpiece.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	11 mm
Minimum Grip	9 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Steel
Rivet Diameter	3.2 mm
Rivet Length	14 mm
Shear Strength	1060 N
Tensile Strength	1285 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

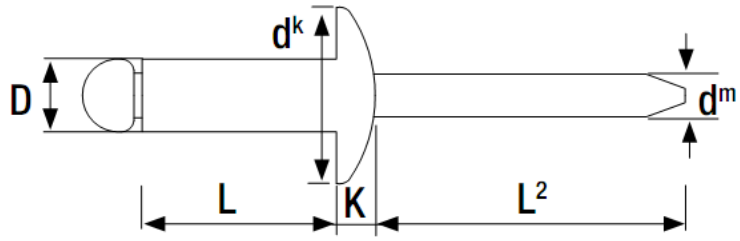



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.0	6.0	1.5	3.5	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	8.0	3.5	5.0	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	10.0	5.5	7.0	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	12.0	7.0	9.0	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	14.0	9.0	11.0	3.1	6.5	0.8	1.90	26.0	915	1125	1000
	16.0	11.0	12.5	3.1	6.5	0.8	1.90	26.0	915	1125	750
	18.0	12.0	14.0	3.1	6.5	0.8	1.90	26.0	915	1125	750
	20.0	14.5	16.5	3.1	6.5	0.8	1.90	26.0	915	1125	500
3.2	6.0	1.5	3.0	3.3	6.5	0.8	2.00	26.0	1060	1285	1000
	8.0	3.0	5.0	3.3	6.5	0.8	2.00	26.0	1060	1285	1000
	10.0	5.0	7.0	3.3	6.5	0.8	2.00	26.0	1060	1285	1000
	12.0	7.0	9.0	3.3	6.5	0.8	2.00	26.0	1060	1285	750
	14.0	9.0	11.0	3.3	6.5	0.8	2.00	26.0	1060	1285	1000
	16.0	11.0	12.5	3.3	6.5	0.8	2.00	26.0	1060	1285	500
	18.0	13.0	14.5	3.3	6.5	0.8	2.00	26.0	1060	1285	500
	20.0	15.0	16.5	4.1	8.0	1.0	2.50	27.0	1550	1990	500
4.0	6.0	1.0	2.0	4.1	8.0	1.0	2.50	27.0	1550	1990	750
	8.0	2.0	4.0	4.1	8.0	1.0	2.50	27.0	1550	1990	750
	10.0	4.0	6.0	4.1	8.0	1.0	2.50	27.0	1550	1990	750
	12.0	6.0	8.0	4.1	8.0	1.0	2.50	27.0	1550	1990	500