
RS PRO Steel/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 25 mm long

Supplier Part Number: OJSD4825

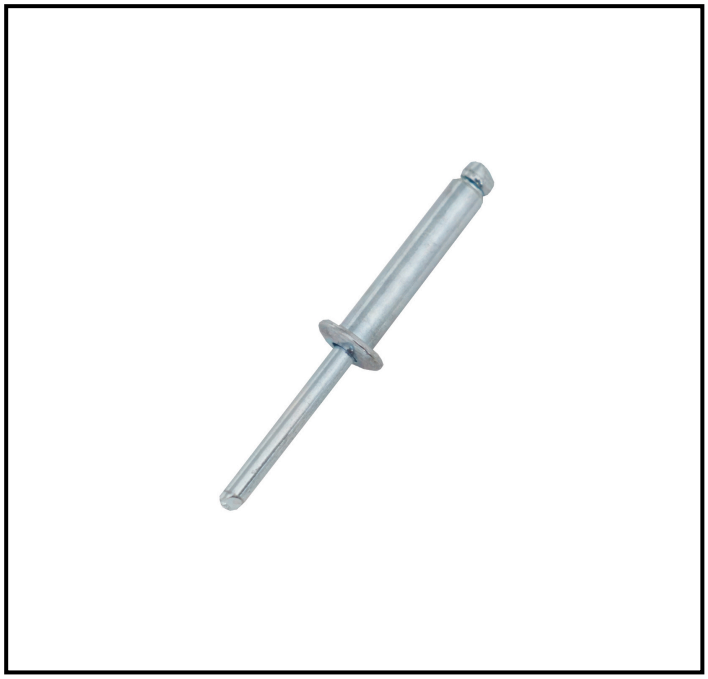

FEATURES

- **Rivet Diameter:** 4.8 mm for precise fitting
- **Rivet Length:** 25 mm to accommodate various material thicknesses
- **Head Type:** Dome for a neat finish
- **Mandrel Material:** Steel for enhanced durability
- **Finish:** Clear Trivalent Chromate Zinc for corrosion resistance
- **Maximum Grip:** 20 mm to suit different applications
- **Minimum Grip:** 17 mm for versatility
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Steel Blind Rivet is designed for secure fastening in applications where access is only possible from one side. Ideal for use in metalworking and construction, this rivet ensures a strong and reliable joint.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	20 mm
Minimum Grip	17 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Steel
Rivet Diameter	4.8 mm
Rivet Length	25 mm
Shear Strength	2300 N
Tensile Strength	2920 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

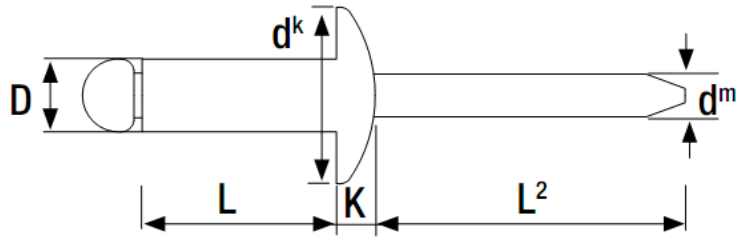



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	14.0	8.0	10.0	4.1	8.0	1.0	2.50	27.0	1550	1990	500
	16.0	10.0	12.0	4.1	8.0	1.0	2.50	27.0	1550	1990	500
	18.0	12.0	14.0	4.1	8.0	1.0	2.50	27.0	1550	1990	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.50	27.0	1550	1990	500
	24.0	18.0	19.5	4.1	8.0	1.0	2.50	27.0	1550	1990	250
4.8	6.0	1.0	2.0	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	8.0	2.0	3.5	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	10.0	3.5	5.5	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	12.0	5.5	7.5	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	14.0	7.5	9.5	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	16.0	9.0	11.0	4.9	9.5	1.1	2.90	28.0	2300	2920	400
	18.0	11.0	13.0	4.9	9.5	1.1	2.90	28.0	2300	2920	400
	20.0	13.0	15.0	4.9	9.5	1.1	2.90	28.0	2300	2920	350
	22.0	15.0	17.0	4.9	9.5	1.1	2.90	28.0	2300	2920	300
	25.0	17.0	20.0	4.9	9.5	1.1	2.90	28.0	2300	2920	250
	30.0	20.0	24.5	4.9	9.5	1.1	2.90	28.0	2300	2920	250
5.0	8.0	2.0	3.5	5.1	9.5	1.1	2.90	28.0	2575	3255	500
	10.0	3.5	5.5	5.1	9.5	1.1	2.90	28.0	2575	3255	500
	12.0	5.5	7.5	5.1	9.5	1.1	2.90	28.0	2575	3255	500
	14.0	7.5	9.5	5.1	9.5	1.1	2.90	28.0	2575	3255	500
	16.0	9.0	11.0	5.1	9.5	1.1	2.90	28.0	2575	3255	400
	18.0	11.0	13.0	5.1	9.5	1.1	2.90	28.0	2575	3255	400
	20.0	13.5	15.0	5.1	9.5	1.1	2.90	28.0	2575	3255	350