
RS PRO Steel/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 30 mm long

Supplier Part Number: OJSD4830

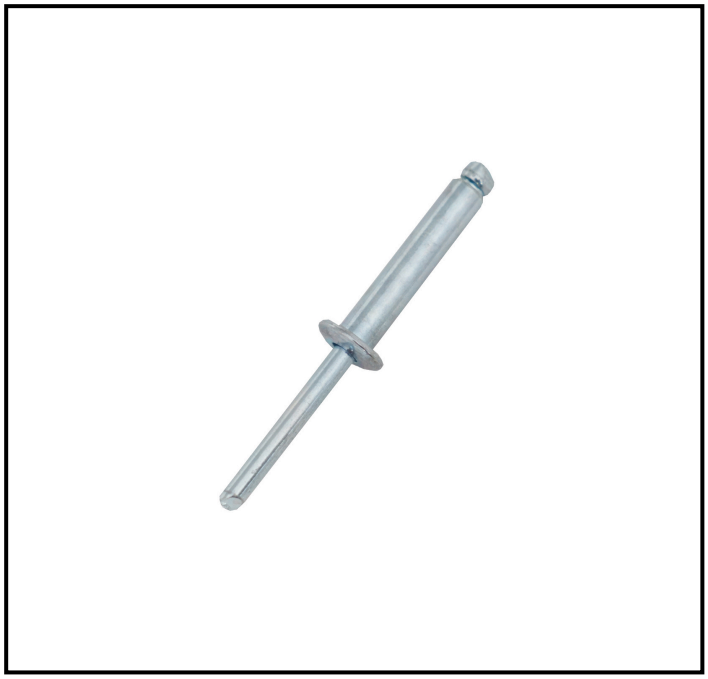

FEATURES

- **Rivet Diameter:** 4.8 mm for precise and consistent fastening
- **Rivet Length:** 30 mm suitable for thicker materials
- **Head Type:** Dome head provides a smooth finish
- **Mandrel Material:** Steel for enhanced strength and durability
- **Finish:** Trivalent Chromate Zinc for corrosion resistance
- **Maximum Grip:** 24.5 mm allows for use with a range of material thicknesses
- **Minimum Grip:** 20 mm ensures a tight fit
- **Fixing Hole Diameter:** 4.9 mm for easy installation

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality steel blind rivet designed for secure fastening in various industrial applications. This rivet is ideal for situations where access is only available from one side of the workpiece. Its robust construction ensures reliable performance and durability.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	24.5 mm
Minimum Grip	20 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Steel
Rivet Diameter	4.8 mm
Rivet Length	30 mm
Shear Strength	2300 N
Tensile Strength	2920 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

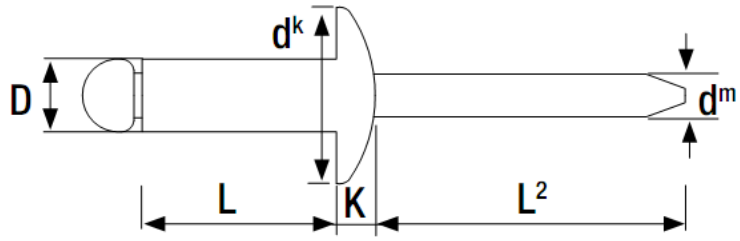



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	14.0	8.0	10.0	4.1	8.0	1.0	2.50	27.0	1550	1990	500
	16.0	10.0	12.0	4.1	8.0	1.0	2.50	27.0	1550	1990	500
	18.0	12.0	14.0	4.1	8.0	1.0	2.50	27.0	1550	1990	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.50	27.0	1550	1990	500
	24.0	18.0	19.5	4.1	8.0	1.0	2.50	27.0	1550	1990	250
4.8	6.0	1.0	2.0	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	8.0	2.0	3.5	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	10.0	3.5	5.5	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	12.0	5.5	7.5	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	14.0	7.5	9.5	4.9	9.5	1.1	2.90	28.0	2300	2920	500
	16.0	9.0	11.0	4.9	9.5	1.1	2.90	28.0	2300	2920	400
	18.0	11.0	13.0	4.9	9.5	1.1	2.90	28.0	2300	2920	400
	20.0	13.0	15.0	4.9	9.5	1.1	2.90	28.0	2300	2920	350
	22.0	15.0	17.0	4.9	9.5	1.1	2.90	28.0	2300	2920	300
	25.0	17.0	20.0	4.9	9.5	1.1	2.90	28.0	2300	2920	250
	30.0	20.0	24.5	4.9	9.5	1.1	2.90	28.0	2300	2920	250
5.0	8.0	2.0	3.5	5.1	9.5	1.1	2.90	28.0	2575	3255	500
	10.0	3.5	5.5	5.1	9.5	1.1	2.90	28.0	2575	3255	500
	12.0	5.5	7.5	5.1	9.5	1.1	2.90	28.0	2575	3255	500
	14.0	7.5	9.5	5.1	9.5	1.1	2.90	28.0	2575	3255	500
	16.0	9.0	11.0	5.1	9.5	1.1	2.90	28.0	2575	3255	400
	18.0	11.0	13.0	5.1	9.5	1.1	2.90	28.0	2575	3255	400
	20.0	13.5	15.0	5.1	9.5	1.1	2.90	28.0	2575	3255	350