
RS PRO Steel/Steel Dome Head Blind Rivet, 6.4 mm Diameter x 12 mm long

Supplier Part Number: OJSD6412

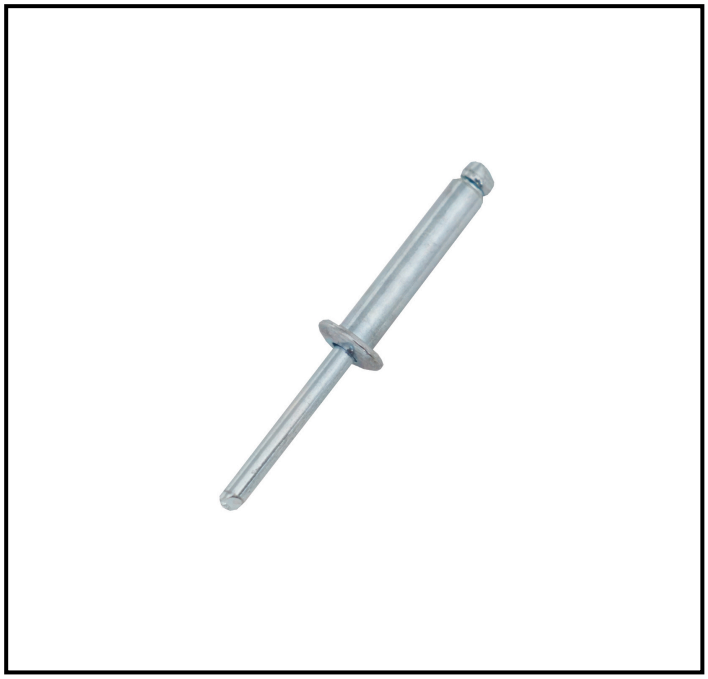

FEATURES

- **Rivet Diameter:** 6.4 mm for robust fastening
- **Rivet Length:** 12 mm to accommodate different material thicknesses
- **Head Type:** Dome for a smooth finish
- **Mandrel Material:** Steel for enhanced strength
- **Finish:** Trivalent Chromate Zinc for corrosion resistance
- **Maximum Grip:** 5.5 mm for versatility in applications
- **Minimum Grip:** 3.5 mm for secure fastening
- **Fixing Hole Diameter:** 6.5 mm for easy installation

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Steel Blind Rivet is designed for secure fastening in applications where access is limited to one side. Ideal for joining materials with varying thicknesses, this rivet ensures a strong and reliable hold. Its steel construction provides durability and resistance to wear, making it suitable for industrial environments.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.5 mm
Mandrel Material	Steel
Maximum Grip	5.5 mm
Minimum Grip	3.5 mm


Mechanical Specifications


Head Diameter	13 mm
Rivet Body Material	Steel
Rivet Diameter	6.4 mm
Rivet Length	12 mm
Shear Strength	4350 N
Tensile Strength	5400 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

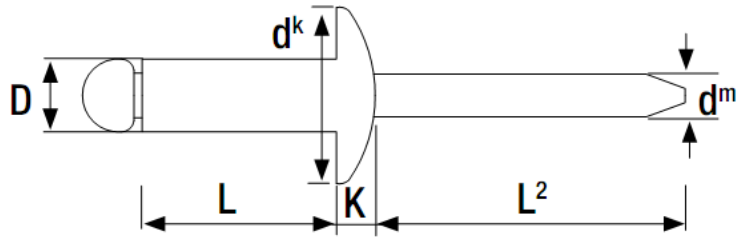



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.0	10.0	2.5	4.0	6.1	12.0	1.5	3.65	30.0	4000	5000	250
	12.0	4.5	6.0	6.1	12.0	1.5	3.65	30.0	4000	5000	250
	15.0	6.0	9.0	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	16.0	8.5	10.5	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	18.0	10.5	12.0	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	22.0	12.5	16.5	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	26.0	16.0	19.0	6.1	12.0	1.5	3.65	30.0	4000	5000	200
6.4	10.0	1.5	3.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	20.0	10.5	13.5	6.5	13.0	1.8	3.85	32.0	4350	5400	150
	22.0	11.5	15.5	6.5	13.0	1.8	3.85	32.0	4350	5400	150
	26.0	15.5	19.0	6.5	13.0	1.8	3.85	32.0	4350	5400	150
	30.0	19.0	23.0	6.5	13.0	1.8	3.85	32.0	4350	5400	125