
RS PRO Steel/Steel Dome Head Blind Rivet, 6.4 mm Diameter x 22 mm long

Supplier Part Number: OJSD6422

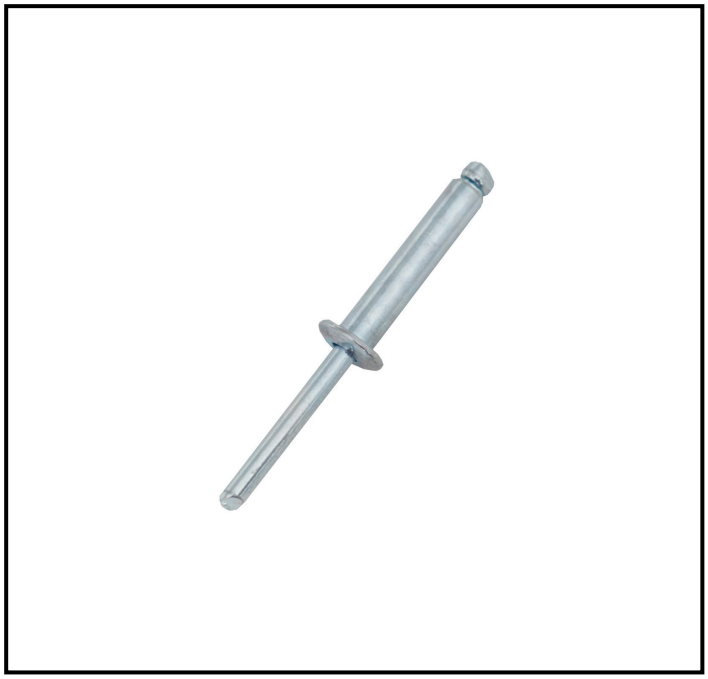

FEATURES

- **Steel Construction:** Provides strength and durability for long-lasting performance.
- **Blind Rivet Design:** Allows for installation from one side, ideal for hard-to-reach areas.
- **Wide Grip Range:** Accommodates material thicknesses from 11.5 mm to 15.5 mm.
- **Trivalent Chromate Finish:** Offers enhanced corrosion resistance.
- **Dome Head Type:** Ensures a neat and flush finish.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Steel Blind Rivet is designed for secure fastening in applications where access is only available from one side. With a 6.4 mm diameter and a length of 22 mm, this rivet is ideal for joining materials with a grip range of 11.5 mm to 15.5 mm. Its steel construction ensures durability and reliability in demanding environments.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.5 mm
Mandrel Material	Steel
Maximum Grip	15.5 mm
Minimum Grip	11.5 mm


Mechanical Specifications


Head Diameter	13 mm
Rivet Body Material	Steel
Rivet Diameter	6.4 mm
Rivet Length	22 mm
Shear Strength	4350 N
Tensile Strength	5400 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

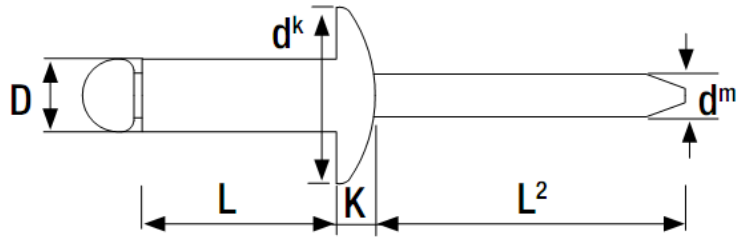



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.0	10.0	2.5	4.0	6.1	12.0	1.5	3.65	30.0	4000	5000	250
	12.0	4.5	6.0	6.1	12.0	1.5	3.65	30.0	4000	5000	250
	15.0	6.0	9.0	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	16.0	8.5	10.5	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	18.0	10.5	12.0	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	22.0	12.5	16.5	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	26.0	16.0	19.0	6.1	12.0	1.5	3.65	30.0	4000	5000	200
6.4	10.0	1.5	3.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	20.0	10.5	13.5	6.5	13.0	1.8	3.85	32.0	4350	5400	150
	22.0	11.5	15.5	6.5	13.0	1.8	3.85	32.0	4350	5400	150
	26.0	15.5	19.0	6.5	13.0	1.8	3.85	32.0	4350	5400	150
	30.0	19.0	23.0	6.5	13.0	1.8	3.85	32.0	4350	5400	125