
RS PRO Steel/Steel Dome Head Blind Rivet, 6.4 mm Diameter x 26 mm long

Supplier Part Number: OJSD6426

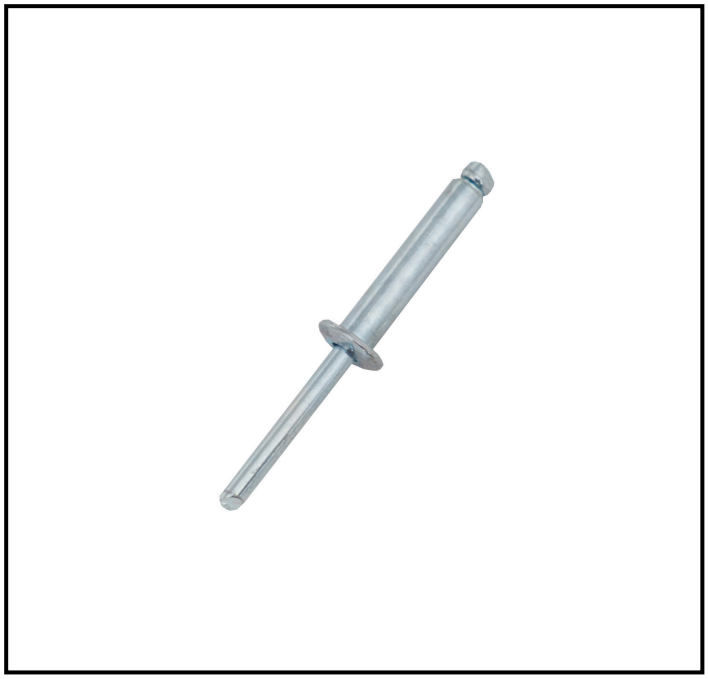

FEATURES

- **Steel Construction:** Offers high strength and durability for long-lasting performance.
- **Blind Rivet Design:** Allows for installation from one side, ideal for hard-to-reach areas.
- **Trivalent Chromate Finish:** Provides corrosion resistance, extending the lifespan of the rivet.
- **6.4 mm Diameter:** Suitable for a range of applications requiring this specific size.
- **13 mm Head Diameter:** Ensures a secure fit and distribution of load.
- **19 mm Maximum Grip:** Accommodates thicker materials, enhancing versatility.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Steel Blind Rivet is designed for secure fastening in applications where access is only available from one side. Ideal for joining materials such as metal, the rivet provides a reliable and robust connection. Its steel construction ensures durability and strength, making it suitable for demanding environments.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.5 mm
Mandrel Material	Steel
Maximum Grip	19 mm
Minimum Grip	15.5 mm


Mechanical Specifications


Head Diameter	13 mm
Rivet Body Material	Steel
Rivet Diameter	6.4 mm
Rivet Length	26 mm
Shear Strength	4350 N
Tensile Strength	5400 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

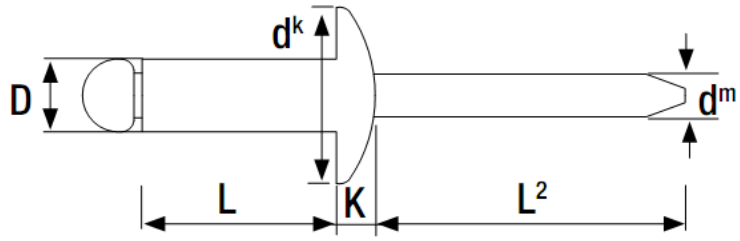



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.0	10.0	2.5	4.0	6.1	12.0	1.5	3.65	30.0	4000	5000	250
	12.0	4.5	6.0	6.1	12.0	1.5	3.65	30.0	4000	5000	250
	15.0	6.0	9.0	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	16.0	8.5	10.5	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	18.0	10.5	12.0	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	22.0	12.5	16.5	6.1	12.0	1.5	3.65	30.0	4000	5000	200
	26.0	16.0	19.0	6.1	12.0	1.5	3.65	30.0	4000	5000	200
6.4	10.0	1.5	3.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	4350	5400	250
	20.0	10.5	13.5	6.5	13.0	1.8	3.85	32.0	4350	5400	150
	22.0	11.5	15.5	6.5	13.0	1.8	3.85	32.0	4350	5400	150
	26.0	15.5	19.0	6.5	13.0	1.8	3.85	32.0	4350	5400	150
	30.0	19.0	23.0	6.5	13.0	1.8	3.85	32.0	4350	5400	125