
RS PRO Steel/Steel Dome Head Blind Rivet, 3.2 mm Diameter x 12 mm long

Supplier Part Number: OJSDM3212

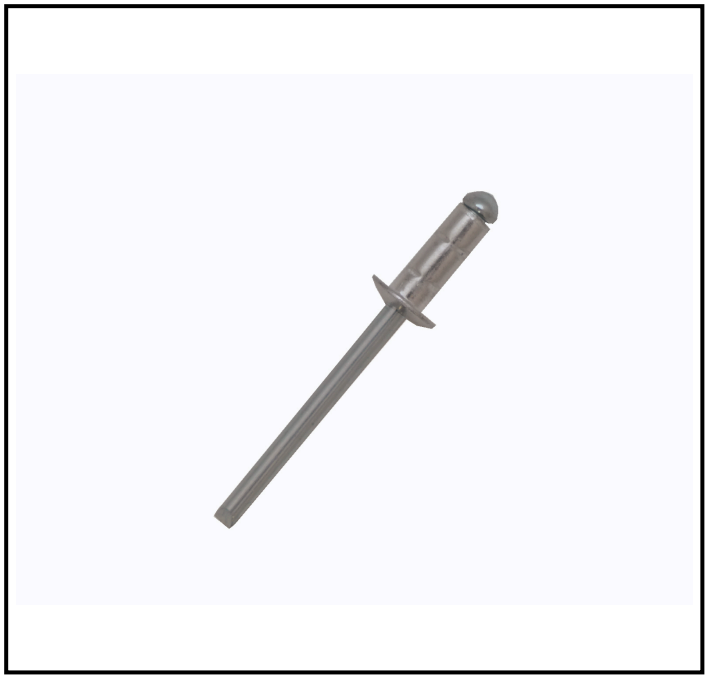

FEATURES

- **Rivet Diameter:** 3.2 mm for precise and secure fastening
- **Rivet Length:** 12 mm suitable for a range of material thicknesses
- **Head Type:** Dome head for an aesthetically pleasing finish
- **Mandrel Material:** Steel for enhanced strength and durability
- **Finish:** Clear trivalent chromate zinc for corrosion resistance
- **Grip Range:** 1.1 mm to 7 mm accommodating different material thicknesses
- **Fixing Hole Diameter:** 3.3 mm ensuring a snug fit

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This steel rivet is ideal for situations where access is only possible from one side, providing a reliable and durable solution.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	7 mm
Minimum Grip	1.1 mm


Mechanical Specifications

Head Diameter	7.2 mm
Rivet Body Material	Steel
Rivet Diameter	3.2 mm
Rivet Length	12 mm
Shear Strength	1200 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

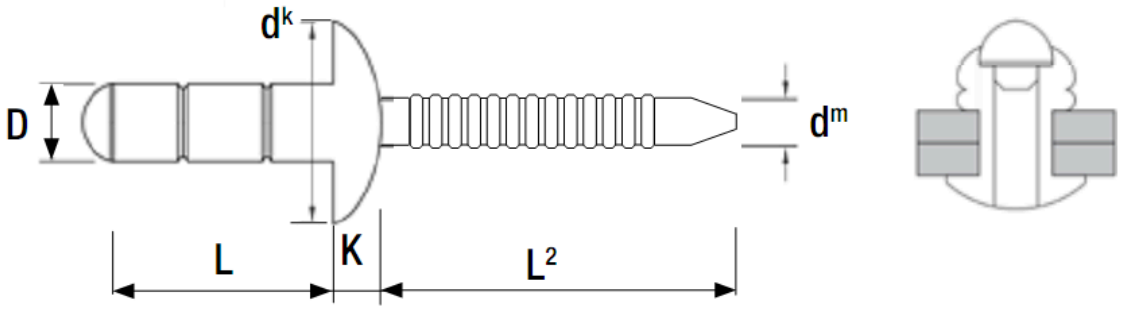

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	9.0	1.1	4.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
	12.0	1.1	7.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
	14.0	6.5	9.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
4.0	10.8	1.5	4.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
	12.5	3.0	6.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
	15.0	5.5	8.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
4.8	10.2	1.5	4.5	4.9	9.8	2.0	3.10	28.0	2400	3200	500
	12.7	3.5	6.3	4.9	9.8	2.0	3.10	28.0	2400	3200	500
	17.5	8.0	12.0	4.9	9.8	2.0	3.10	28.0	2400	3200	400