
RS PRO Steel/Steel Dome Head Blind Rivet, 4 mm Diameter x 10.8 mm long

Supplier Part Number: OJSDM4010

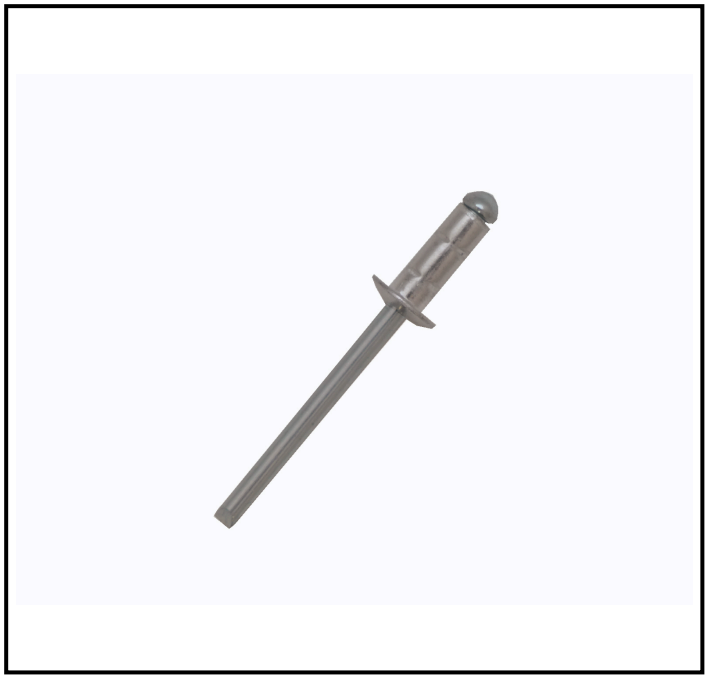

FEATURES

- **Dome Head:** Provides a smooth finish and distributes load evenly.
- **Steel Mandrel:** Offers high tensile strength for reliable fastening.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for longevity.
- **4.1 mm Fixing Hole Diameter:** Ensures compatibility with standard drill sizes.
- **Wide Grip Range:** Accommodates material thickness from 1.5 mm to 4.5 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Steel Blind Rivet is designed for secure fastening in a variety of applications. With a 4 mm diameter and a 10.8 mm length, it is ideal for joining materials where access is only available from one side. The steel construction ensures durability and strength, making it suitable for industrial use.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	4.5 mm
Minimum Grip	1.5 mm


Mechanical Specifications

Head Diameter	8.1 mm
Rivet Body Material	Steel
Rivet Diameter	4 mm
Rivet Length	10.8 mm
Shear Strength	1650 N
Tensile Strength	2400 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

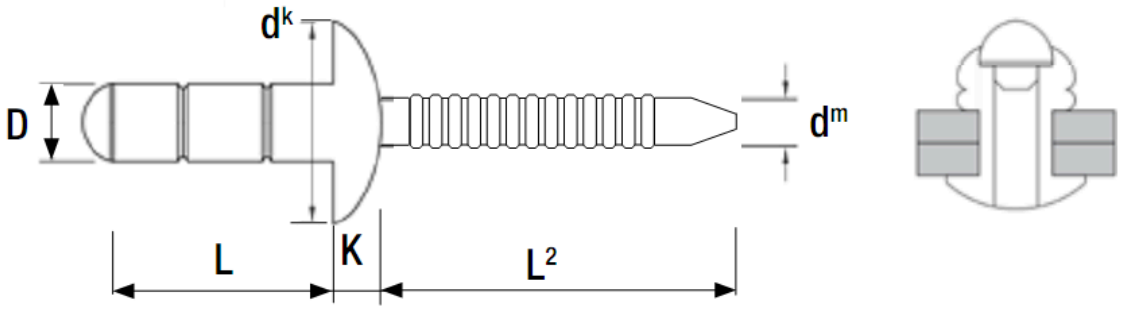

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	9.0	1.1	4.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
	12.0	1.1	7.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
	14.0	6.5	9.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
4.0	10.8	1.5	4.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
	12.5	3.0	6.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
	15.0	5.5	8.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
4.8	10.2	1.5	4.5	4.9	9.8	2.0	3.10	28.0	2400	3200	500
	12.7	3.5	6.3	4.9	9.8	2.0	3.10	28.0	2400	3200	500
	17.5	8.0	12.0	4.9	9.8	2.0	3.10	28.0	2400	3200	400