
RS PRO Steel/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 12.7 mm long

Supplier Part Number: OJSDM4812

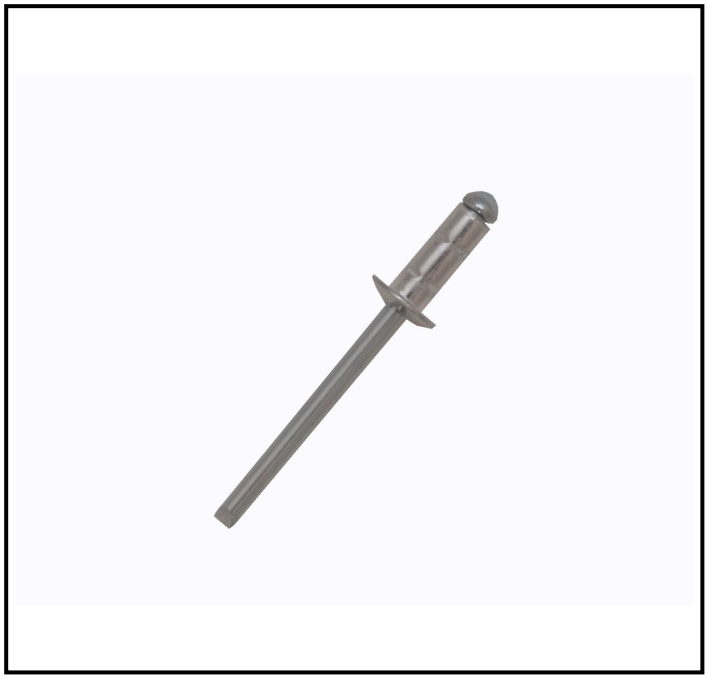

FEATURES

- **Steel Construction:** Provides strength and durability for long-lasting performance.
- **Blind Rivet Design:** Allows for installation where only one side is accessible.
- **Trivalent Chromate Finish:** Offers corrosion resistance for enhanced longevity.
- **Dome Head Type:** Ensures a neat and flush finish.
- **Wide Grip Range:** Accommodates material thicknesses from 3.5 mm to 6.3 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Steel Blind Rivets are designed for fastening materials where access is only possible from one side. These rivets are ideal for applications requiring a strong, permanent joint. The steel construction ensures durability and reliability in various industrial settings.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	6.3 mm
Minimum Grip	3.5 mm


Mechanical Specifications

Head Diameter	9.8 mm
Rivet Body Material	Steel
Rivet Diameter	4.8 mm
Rivet Length	12.7 mm
Shear Strength	2400 N
Tensile Strength	3200 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

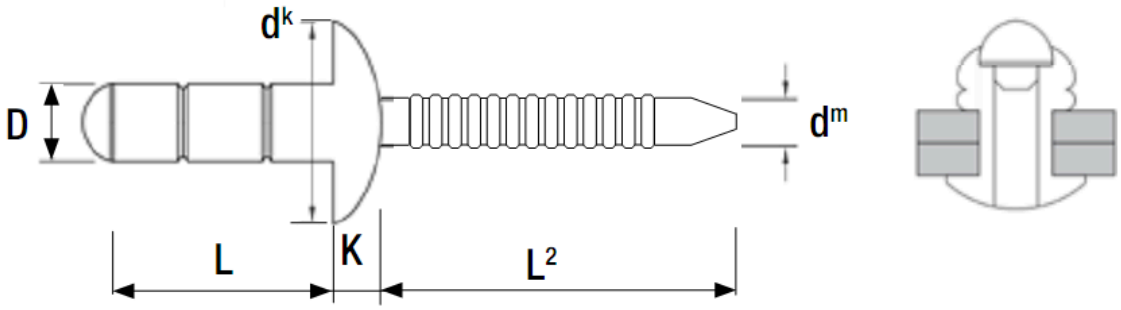

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	9.0	1.1	4.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
	12.0	1.1	7.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
	14.0	6.5	9.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
4.0	10.8	1.5	4.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
	12.5	3.0	6.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
	15.0	5.5	8.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
4.8	10.2	1.5	4.5	4.9	9.8	2.0	3.10	28.0	2400	3200	500
	12.7	3.5	6.3	4.9	9.8	2.0	3.10	28.0	2400	3200	500
	17.5	8.0	12.0	4.9	9.8	2.0	3.10	28.0	2400	3200	400