
RS PRO Steel/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 17.5mm long

Supplier Part Number: OJSDM4817

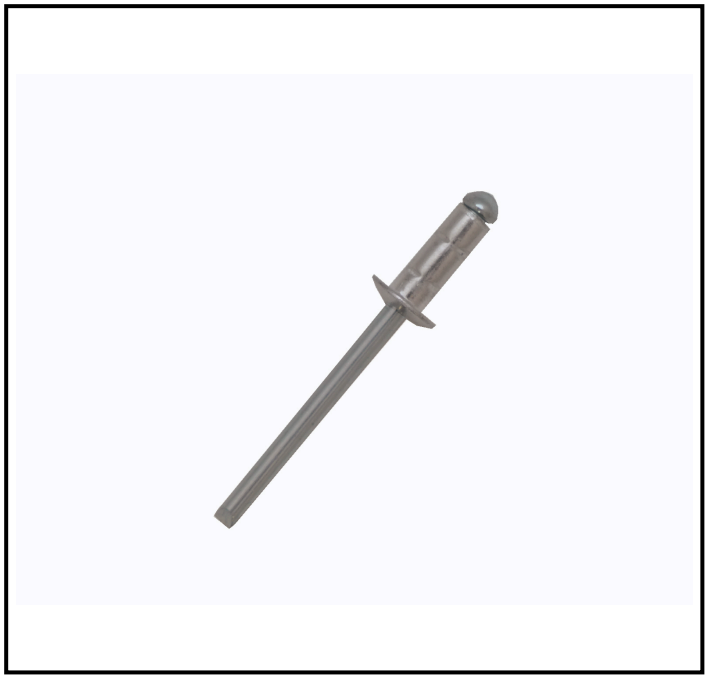

FEATURES

- **Steel Rivet Body:** Offers high strength and durability for long-lasting performance.
- **Blind Rivet Design:** Allows for installation where only one side of the workpiece is accessible.
- **Trivalent Chromate Finish:** Provides corrosion resistance, enhancing the rivet's lifespan.
- **4.8 mm Diameter:** Suitable for a variety of applications requiring a standard rivet size.
- **17.5 mm Length:** Accommodates a grip range of 8 mm to 12 mm, offering versatility in use.
- **Dome Head Type:** Ensures a neat and flush finish for aesthetic and functional purposes.
- **Compliance with Standards:** Meets DIN 7337 and ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Steel Blind Rivet is designed for secure fastening in applications where access is limited to one side. Ideal for use in construction and manufacturing, this rivet provides a reliable and durable solution for joining materials. Its steel construction ensures strength and longevity, making it suitable for demanding environments.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	12 mm
Minimum Grip	8 mm


Mechanical Specifications

Head Diameter	9.8 mm
Rivet Body Material	Steel
Rivet Diameter	4.8 mm
Rivet Length	17.5 mm
Shear Strength	2400 N
Tensile Strength	3200 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

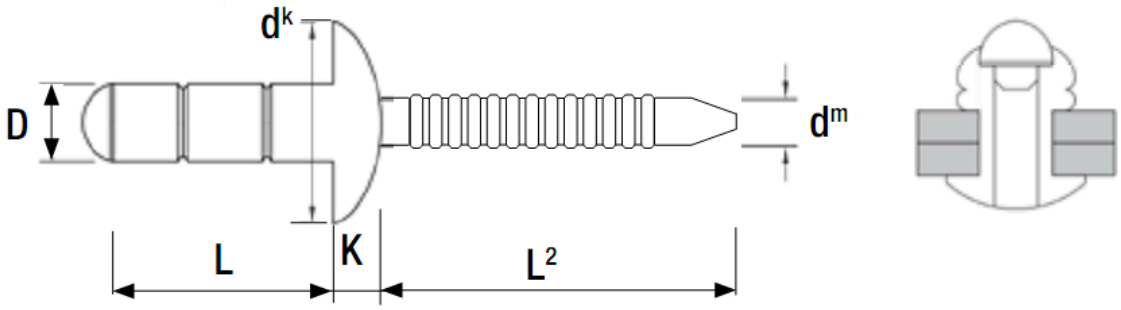

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	9.0	1.1	4.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
	12.0	1.1	7.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
	14.0	6.5	9.0	3.3	7.2	1.2	2.10	26.0	1200	1600	1000
4.0	10.8	1.5	4.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
	12.5	3.0	6.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
	15.0	5.5	8.5	4.1	8.1	1.4	2.63	27.0	1650	2400	500
4.8	10.2	1.5	4.5	4.9	9.8	2.0	3.10	28.0	2400	3200	500
	12.7	3.5	6.3	4.9	9.8	2.0	3.10	28.0	2400	3200	500
	17.5	8.0	12.0	4.9	9.8	2.0	3.10	28.0	2400	3200	400