
RS PRO Steel/Steel Dome Head Blind Rivet, 3.2 mm Diameter x 12 mm long

Supplier Part Number: OJSDS3212

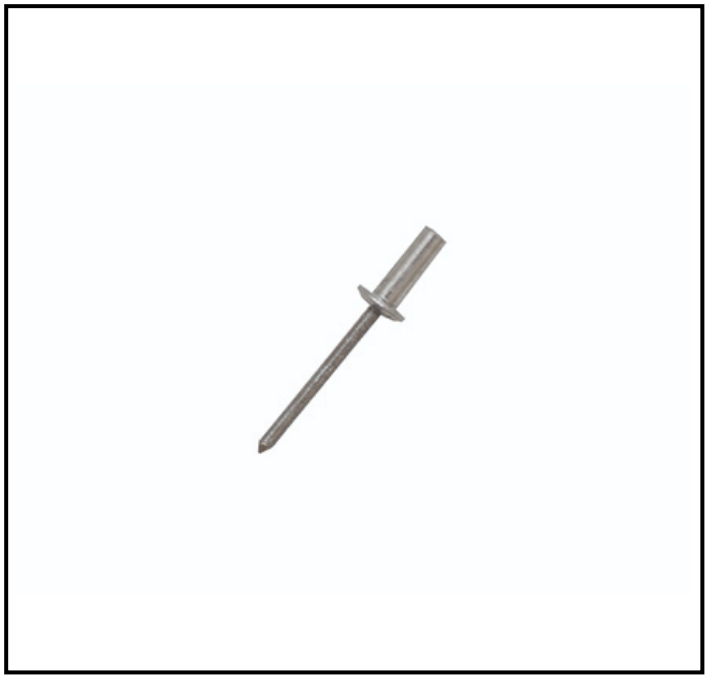

FEATURES

- **Sealed Design:** Provides a tight and secure fit, preventing leakage.
- **Steel Construction:** Offers high strength and durability for demanding applications.
- **Dome Head:** Ensures a neat finish and distributes load evenly.
- **Trivalent Chromate Finish:** Provides corrosion resistance for long-lasting performance.
- **Wide Grip Range:** Accommodates material thicknesses from 5 mm to 6.5 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Steel Sealed Blind Rivet is designed for secure fastening in applications where access is limited to one side. With a 3.2 mm diameter and a 12 mm length, this rivet is ideal for creating strong, reliable joints in metalworking and construction projects. Its sealed design ensures a tight fit, preventing leakage and enhancing durability.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Sealed Blind Rivet
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	6.5 mm
Minimum Grip	5 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Steel
Rivet Diameter	3.2 mm
Rivet Length	12 mm
Shear Strength	1600 N
Tensile Strength	2200 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

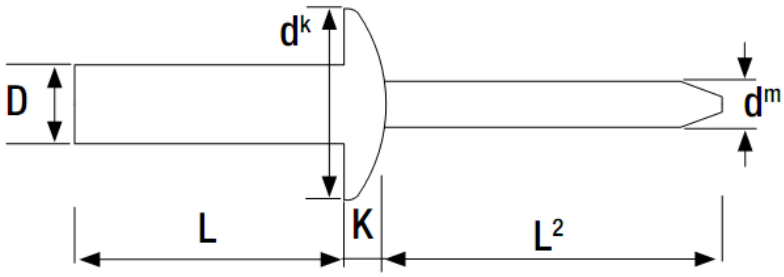



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	0.5	1.5	3.3	6.0	1.0	1.90	26.0	1600	2200	1000
	8.0	1.5	3.0	3.3	6.0	1.0	1.90	26.0	1600	2200	1000
	9.5	3.0	5.0	3.3	6.0	1.0	1.90	26.0	1600	2200	1000
	12.0	5.0	6.5	3.3	6.0	1.0	1.90	26.0	1600	2200	1000
4.0	6.0	0.5	1.5	4.1	8.0	1.4	2.30	27.0	2300	2500	500
	8.0	1.5	3.0	4.1	8.0	1.4	2.30	27.0	2300	2500	800
	10.0	3.0	5.0	4.1	8.0	1.4	2.30	27.0	2300	2500	800
	12.0	5.0	6.5	4.1	8.0	1.4	2.30	27.0	2300	2500	800
	15.0	6.5	10.5	4.1	8.0	1.4	2.30	27.0	2300	2500	500
4.8	8.0	0.5	3.0	4.9	9.5	1.7	2.90	28.0	2900	3800	500
	9.5	3.0	5.0	4.9	9.5	1.7	2.90	28.0	2900	3800	500
	12.0	5.0	6.5	4.9	9.5	1.7	2.90	28.0	2900	3800	500
	16.0	6.5	10.5	4.9	9.5	1.7	2.90	28.0	2900	3800	400