
RS PRO Steel/Steel Countersunk Head Blind Rivet, 3.2 mm Diameter x 10 mm long

Supplier Part Number: OJSK3210

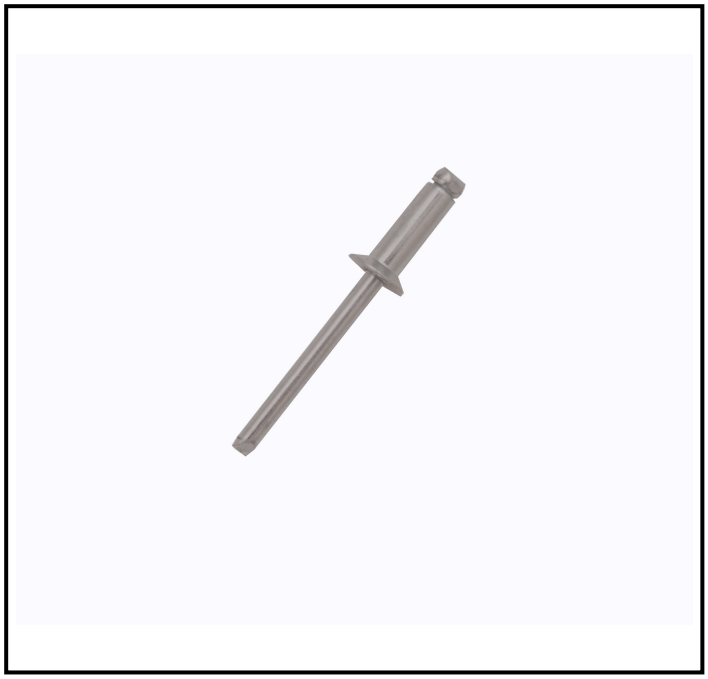

FEATURES

- **Steel Rivet Body:** Offers high strength and durability for long-lasting performance.
- **Countersunk Head:** Provides a flush finish, ideal for applications requiring a smooth surface.
- **Trivalent Chromate Finish:** Enhances corrosion resistance, extending the lifespan of the rivet.
- **3.2 mm Diameter:** Suitable for a variety of fastening applications.
- **5 mm to 6.5 mm Grip Range:** Accommodates different material thicknesses for versatile use.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Steel Blind Rivet is designed for secure fastening in applications where access is only available from one side. Ideal for joining materials such as metal, plastic, and wood, this rivet ensures a strong and reliable hold. Its steel construction provides durability and resistance to wear.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	6.5 mm
Minimum Grip	5 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Steel
Rivet Diameter	3.2 mm
Rivet Length	10 mm
Shear Strength	1060 N
Tensile Strength	1285 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

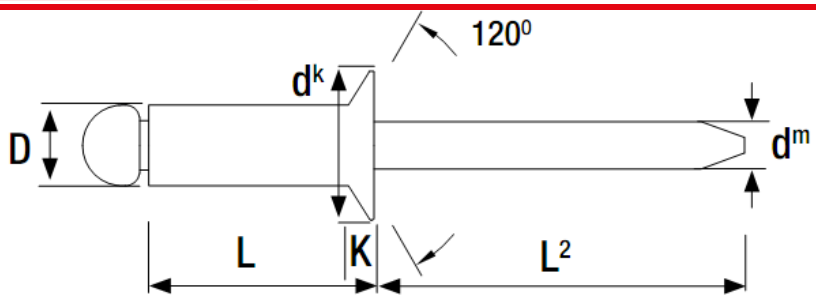



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.0	6.0	1.5	3.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	8.0	3.0	5.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	10.0	5.0	6.5	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	12.0	6.5	8.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
3.2	5.5	1.0	2.5	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	6.0	1.5	3.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	8.0	3.0	5.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	10.0	5.0	6.5	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	12.0	6.5	8.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	14.0	8.0	10.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
4.0	6.0	1.5	2.0	4.1	7.5	1.4	2.50	27.0	1550	1990	1000
	8.0	2.0	4.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	10.0	4.0	6.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	12.0	6.0	8.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	14.0	8.0	10.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	16.0	10.0	12.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	18.0	12.0	14.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	20.0	14.0	15.5	4.1	7.5	1.4	2.50	27.0	1550	1990	500

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	8.0	1.5	3.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	10.0	3.5	5.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	12.0	5.5	7.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	14.0	7.5	9.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	16.0	9.0	11.0	4.9	9.0	1.8	2.90	28.0	2300	2920	400
	18.0	11.0	13.0	4.9	9.0	1.8	2.90	28.0	2300	2920	400
	20.0	13.0	15.0	4.9	9.0	1.8	2.90	28.0	2300	2920	350
	25.0	17.0	20.0	4.9	9.0	1.8	2.90	28.0	2300	2920	250