
RS PRO Steel/Steel Countersunk Head Blind Rivet, 4 mm Diameter x 12 mm long

Supplier Part Number: OJSK4012

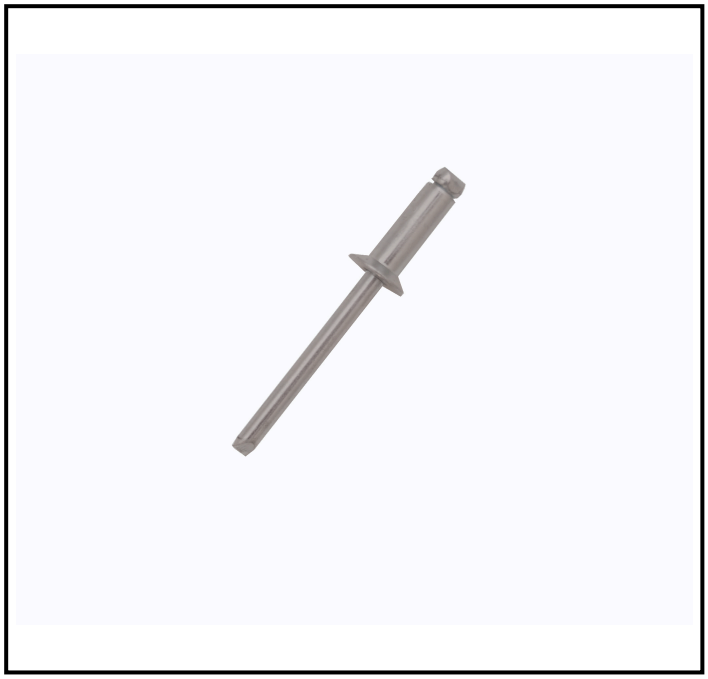

FEATURES

- **Steel Rivet Body:** Offers high strength and durability.
- **Countersunk Head:** Provides a flush finish for a neat appearance.
- **Trivalent Chromate Finish:** Enhances corrosion resistance.
- **4 mm Rivet Diameter:** Suitable for a variety of applications.
- **12 mm Rivet Length:** Accommodates materials with varying thicknesses.
- **6-8 mm Grip Range:** Versatile for different material thicknesses.
- **Steel Mandrel:** Ensures consistent performance and reliability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4 mm Steel Blind Rivet is designed for secure fastening in applications where access is only available from one side. Ideal for use in construction and manufacturing, this rivet provides a reliable and durable solution for joining materials. Its steel construction ensures strength and longevity.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	8 mm
Minimum Grip	6 mm


Mechanical Specifications


Head Diameter	7.5 mm
Rivet Body Material	Steel
Rivet Diameter	4 mm
Rivet Length	12 mm
Shear Strength	1550 N
Tensile Strength	1990 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

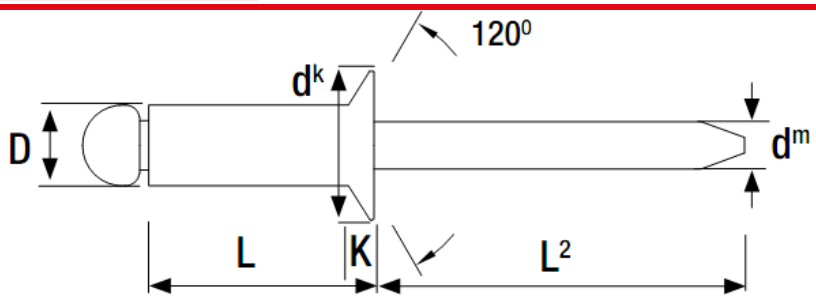



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.0	6.0	1.5	3.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	8.0	3.0	5.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	10.0	5.0	6.5	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	12.0	6.5	8.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
3.2	5.5	1.0	2.5	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	6.0	1.5	3.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	8.0	3.0	5.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	10.0	5.0	6.5	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	12.0	6.5	8.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	14.0	8.0	10.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
4.0	6.0	1.5	2.0	4.1	7.5	1.4	2.50	27.0	1550	1990	1000
	8.0	2.0	4.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	10.0	4.0	6.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	12.0	6.0	8.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	14.0	8.0	10.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	16.0	10.0	12.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	18.0	12.0	14.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	20.0	14.0	15.5	4.1	7.5	1.4	2.50	27.0	1550	1990	500

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	8.0	1.5	3.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	10.0	3.5	5.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	12.0	5.5	7.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	14.0	7.5	9.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	16.0	9.0	11.0	4.9	9.0	1.8	2.90	28.0	2300	2920	400
	18.0	11.0	13.0	4.9	9.0	1.8	2.90	28.0	2300	2920	400
	20.0	13.0	15.0	4.9	9.0	1.8	2.90	28.0	2300	2920	350
	25.0	17.0	20.0	4.9	9.0	1.8	2.90	28.0	2300	2920	250