
RS PRO Steel/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 16 mm long

Supplier Part Number: OJSK4816

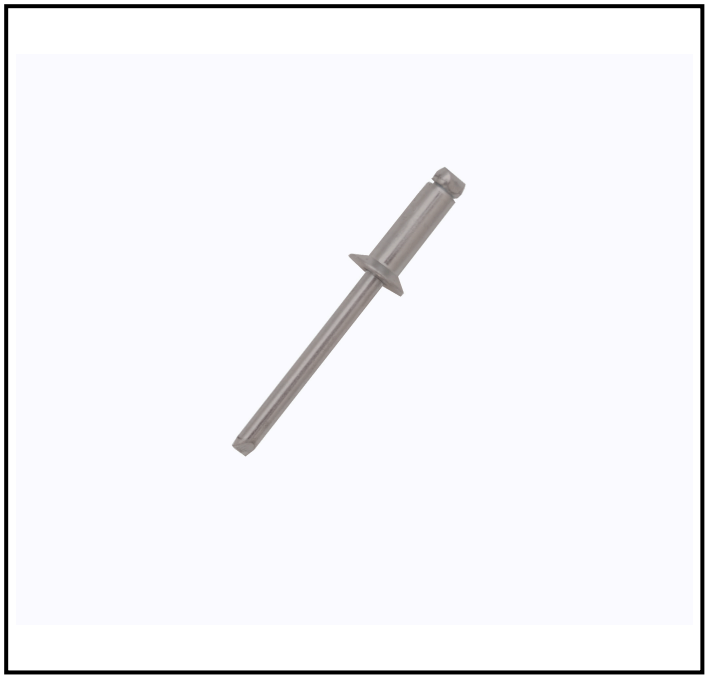

FEATURES

- **Rivet Diameter:** 4.8 mm for precise fitting in pre-drilled holes
- **Rivet Length:** 16 mm suitable for a range of material thicknesses
- **Head Type:** Countersunk for a flush finish
- **Mandrel Material:** Steel for enhanced strength and durability
- **Finish:** Clear Trivalent Chromate Zinc for corrosion resistance
- **Maximum Grip:** 11 mm accommodating thicker materials
- **Minimum Grip:** 9 mm for versatility in application
- **Standards:** Complies with DIN 7337 and multiple ISO standards ensuring quality and reliability

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Steel Blind Rivet is designed for secure fastening in applications where access is only available from one side. Ideal for use in construction and manufacturing, this rivet provides a strong and reliable hold, ensuring structural integrity and ease of installation.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	11 mm
Minimum Grip	9 mm


Mechanical Specifications


Head Diameter	9 mm
Rivet Body Material	Steel
Rivet Diameter	4.8 mm
Rivet Length	16 mm
Shear Strength	2300 N
Tensile Strength	2920 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

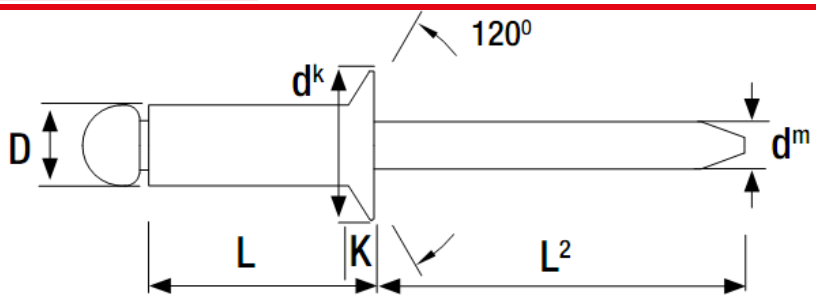



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.0	6.0	1.5	3.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	8.0	3.0	5.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	10.0	5.0	6.5	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	12.0	6.5	8.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
3.2	5.5	1.0	2.5	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	6.0	1.5	3.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	8.0	3.0	5.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	10.0	5.0	6.5	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	12.0	6.5	8.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	14.0	8.0	10.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
4.0	6.0	1.5	2.0	4.1	7.5	1.4	2.50	27.0	1550	1990	1000
	8.0	2.0	4.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	10.0	4.0	6.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	12.0	6.0	8.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	14.0	8.0	10.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	16.0	10.0	12.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	18.0	12.0	14.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	20.0	14.0	15.5	4.1	7.5	1.4	2.50	27.0	1550	1990	500

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	8.0	1.5	3.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	10.0	3.5	5.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	12.0	5.5	7.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	14.0	7.5	9.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	16.0	9.0	11.0	4.9	9.0	1.8	2.90	28.0	2300	2920	400
	18.0	11.0	13.0	4.9	9.0	1.8	2.90	28.0	2300	2920	400
	20.0	13.0	15.0	4.9	9.0	1.8	2.90	28.0	2300	2920	350
	25.0	17.0	20.0	4.9	9.0	1.8	2.90	28.0	2300	2920	250