
RS PRO Steel/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 20 mm long

Supplier Part Number: OJSK4820

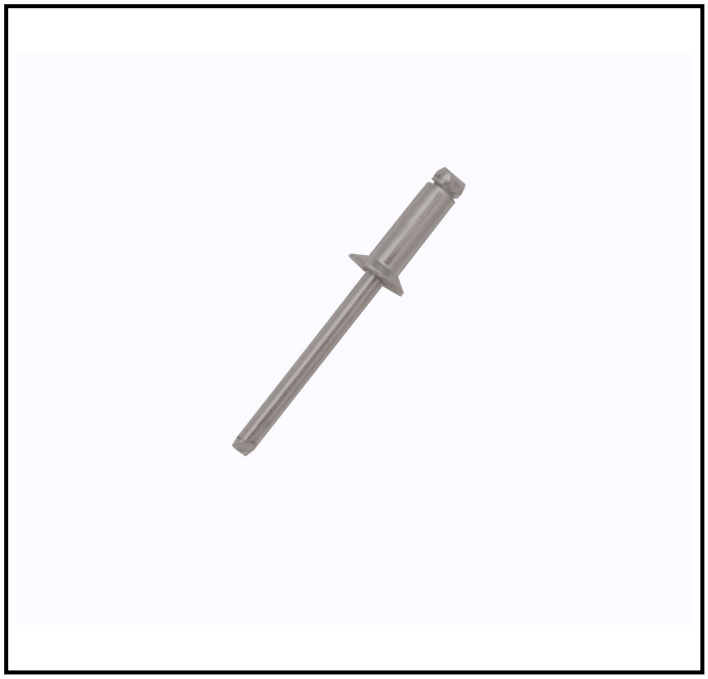

FEATURES

- **Steel Construction:** Provides strength and durability for long-lasting performance.
- **Blind Rivet Design:** Allows for installation from one side, ideal for inaccessible areas.
- **Trivalent Chromate Finish:** Offers corrosion resistance, extending the lifespan of the rivet.
- **Countersunk Head:** Ensures a flush finish, improving the aesthetic of the assembly.
- **Wide Grip Range:** Accommodates material thicknesses from 13 mm to 15 mm, offering versatility.
- **Compliance with Standards:** Meets DIN 7337 and ISO standards, ensuring quality and reliability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality steel blind rivet designed for secure fastening in various industrial applications. This rivet is ideal for situations where access is only available from one side of the workpiece, providing a strong and reliable joint. The steel construction ensures durability and resistance to wear.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	15 mm
Minimum Grip	13 mm


Mechanical Specifications


Head Diameter	9 mm
Rivet Body Material	Steel
Rivet Diameter	4.8 mm
Rivet Length	20 mm
Shear Strength	2300 N
Tensile Strength	2920 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

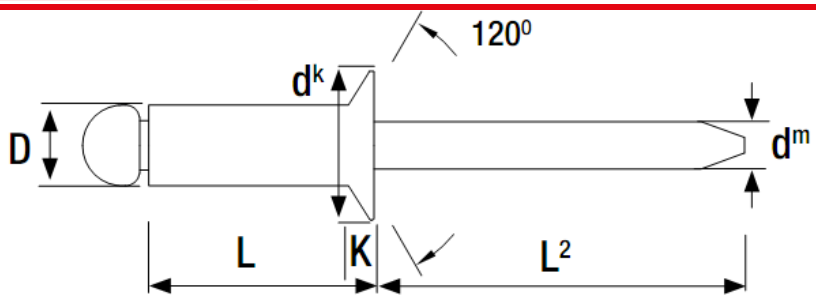



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.0	6.0	1.5	3.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	8.0	3.0	5.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	10.0	5.0	6.5	3.1	6.0	1.1	1.90	26.0	950	1125	1000
	12.0	6.5	8.0	3.1	6.0	1.1	1.90	26.0	950	1125	1000
3.2	5.5	1.0	2.5	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	6.0	1.5	3.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	8.0	3.0	5.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	10.0	5.0	6.5	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	12.0	6.5	8.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
	14.0	8.0	10.0	3.3	6.0	1.1	2.00	26.0	1060	1285	1000
4.0	6.0	1.5	2.0	4.1	7.5	1.4	2.50	27.0	1550	1990	1000
	8.0	2.0	4.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	10.0	4.0	6.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	12.0	6.0	8.0	4.1	7.5	1.4	2.50	27.0	1550	1990	800
	14.0	8.0	10.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	16.0	10.0	12.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	18.0	12.0	14.0	4.1	7.5	1.4	2.50	27.0	1550	1990	500
	20.0	14.0	15.5	4.1	7.5	1.4	2.50	27.0	1550	1990	500

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	8.0	1.5	3.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	10.0	3.5	5.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	12.0	5.5	7.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	14.0	7.5	9.5	4.9	9.0	1.8	2.90	28.0	2300	2920	500
	16.0	9.0	11.0	4.9	9.0	1.8	2.90	28.0	2300	2920	400
	18.0	11.0	13.0	4.9	9.0	1.8	2.90	28.0	2300	2920	400
	20.0	13.0	15.0	4.9	9.0	1.8	2.90	28.0	2300	2920	350
	25.0	17.0	20.0	4.9	9.0	1.8	2.90	28.0	2300	2920	250