
RS PRO Steel/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 16 mm long

Supplier Part Number: OJSL481616

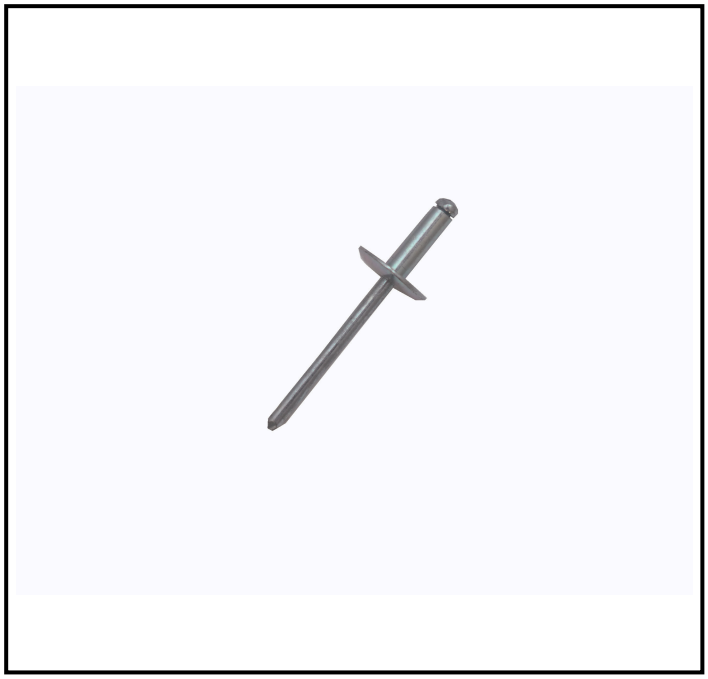

FEATURES

- **Flange Head:** Ensures a wide bearing surface for increased load distribution.
- **Steel Mandrel:** Provides high tensile strength for robust fastening.
- **Clear Trivalent Chromate Finish:** Offers enhanced corrosion resistance.
- **Rivet Diameter of 4.8 mm:** Suitable for medium-duty applications.
- **Grip Range of 10 mm to 11.5 mm:** Accommodates various material thicknesses.
- **Conforms to DIN 7337:** Ensures compliance with industry standards.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Steel Blind Rivet is designed for secure fastening in a variety of industrial applications. With a 4.8 mm diameter and a flange head type, it provides reliable performance in environments where access is only possible from one side. This blind rivet is ideal for applications requiring a strong, durable connection.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	11.5 mm
Minimum Grip	10 mm


Mechanical Specifications


Head Diameter	16 mm
Rivet Body Material	Steel
Rivet Diameter	4.8 mm
Rivet Length	16 mm
Shear Strength	2300 N
Tensile Strength	2920 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

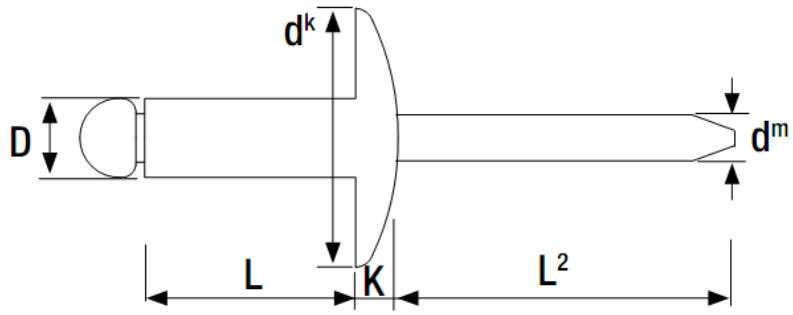



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	10.0	4.5	6.0	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	12.0	6.0	8.0	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	14.0	8.0	10.0	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	16.0	10.0	11.5	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	18.0	11.5	13.5	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	20.0	13.5	15.0	4.9	16.0	2.5	2.90	28.0	2300	2920	200
	25.0	17.0	20.0	4.9	16.0	2.5	2.90	28.0	2300	2920	200