
RS PRO Steel/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 18 mm long

Supplier Part Number: OJSL481816

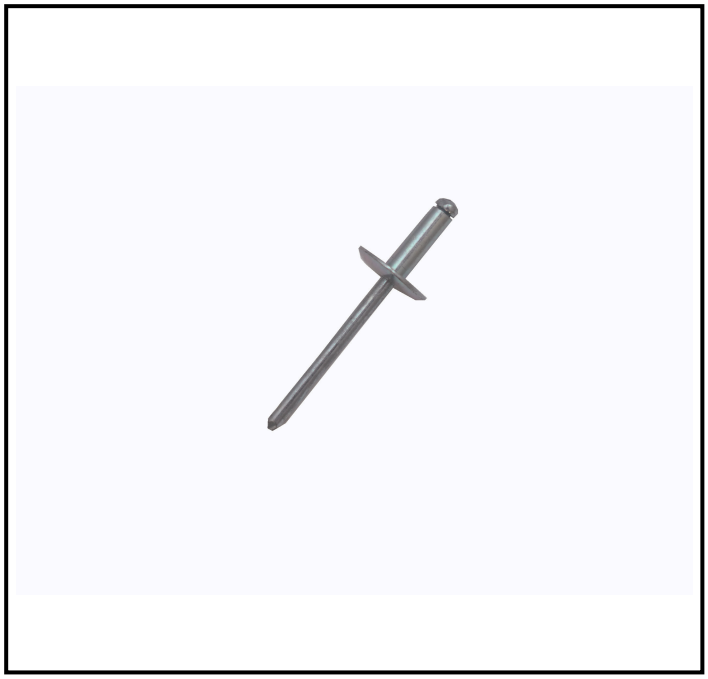

FEATURES

- **Rivet Diameter:** 4.8 mm for precise and consistent fastening
- **Rivet Length:** 18 mm suitable for a range of material thicknesses
- **Head Type:** Flange head provides a larger bearing surface
- **Mandrel Material:** Steel mandrel for enhanced strength and durability
- **Finish:** Clear trivalent chromate zinc finish for corrosion resistance
- **Maximum Grip:** 13.5 mm allows for versatility in material thickness
- **Minimum Grip:** 11.5 mm ensures a secure fit in thinner materials
- **Fixing Hole Diameter:** 4.9 mm for easy installation

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Blind Rivet is designed for secure fastening in applications where access is only available from one side. Made from durable steel, this rivet ensures a strong and reliable hold, making it ideal for industrial and construction use.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	13.5 mm
Minimum Grip	11.5 mm


Mechanical Specifications


Head Diameter	16 mm
Rivet Body Material	Steel
Rivet Diameter	4.8 mm
Rivet Length	18 mm
Shear Strength	2300 N
Tensile Strength	2920 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

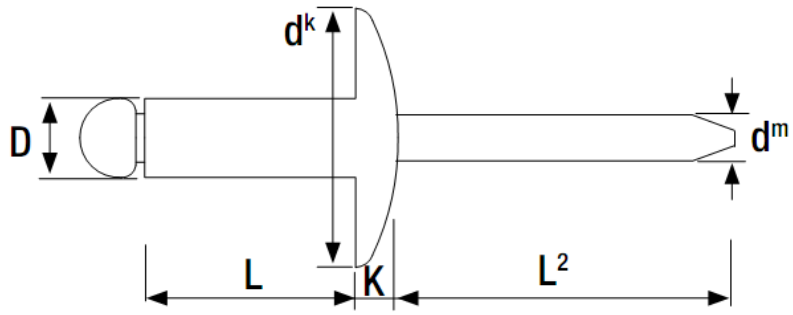



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	10.0	4.5	6.0	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	12.0	6.0	8.0	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	14.0	8.0	10.0	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	16.0	10.0	11.5	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	18.0	11.5	13.5	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	20.0	13.5	15.0	4.9	16.0	2.5	2.90	28.0	2300	2920	200
	25.0	17.0	20.0	4.9	16.0	2.5	2.90	28.0	2300	2920	200