
RS PRO Steel/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 20 mm long

Supplier Part Number: OJSL482016

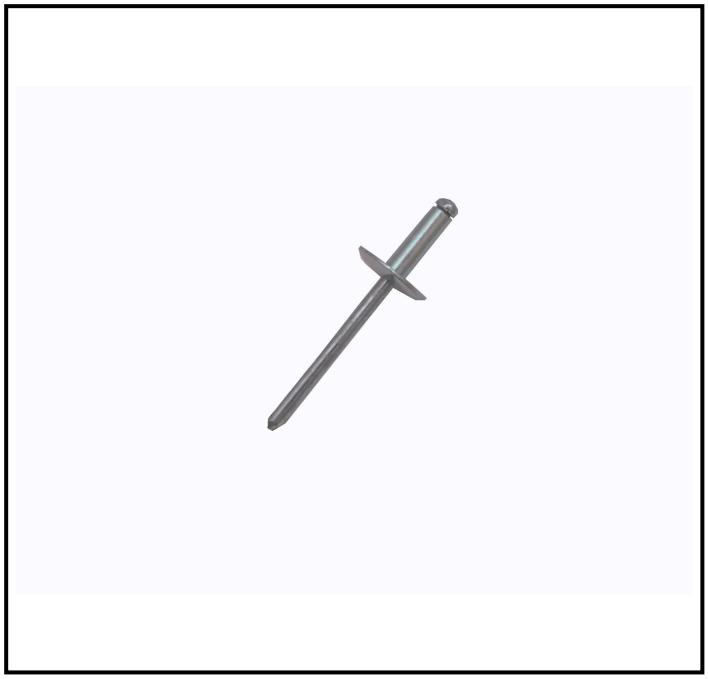

FEATURES

- **Rivet Diameter:** 4.8 mm for precise fit and secure fastening
- **Rivet Length:** 20 mm to accommodate varying material thicknesses
- **Head Type:** Flange for increased load distribution
- **Mandrel Material:** Steel for enhanced durability and strength
- **Finish:** Clear Trivalent Chromate Zinc for corrosion resistance
- **Maximum Grip:** 15 mm to suit a range of applications
- **Minimum Grip:** 13.5 mm for versatility in material thickness
- **Fixing Hole Diameter:** 4.9 mm for easy installation

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Blind Rivet is designed for secure fastening in various industrial applications. Made from durable steel, this rivet provides reliable performance in environments where high strength is required. Its blind design allows for installation from one side, making it ideal for use in situations where access is limited.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	15 mm
Minimum Grip	13.5 mm


Mechanical Specifications


Head Diameter	16 mm
Rivet Body Material	Steel
Rivet Diameter	4.8 mm
Rivet Length	20 mm
Shear Strength	2300 N
Tensile Strength	2920 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

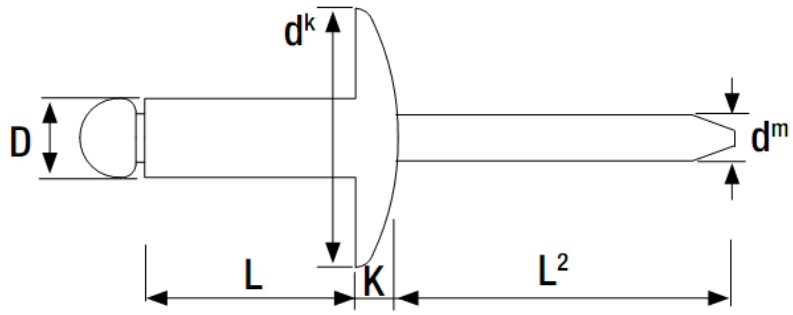



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	10.0	4.5	6.0	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	12.0	6.0	8.0	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	14.0	8.0	10.0	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	16.0	10.0	11.5	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	18.0	11.5	13.5	4.9	16.0	2.5	2.90	28.0	2300	2920	250
	20.0	13.5	15.0	4.9	16.0	2.5	2.90	28.0	2300	2920	200
	25.0	17.0	20.0	4.9	16.0	2.5	2.90	28.0	2300	2920	200