
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 3.2 mm Diameter x 16 mm long

Supplier Part Number: OJSSD3216

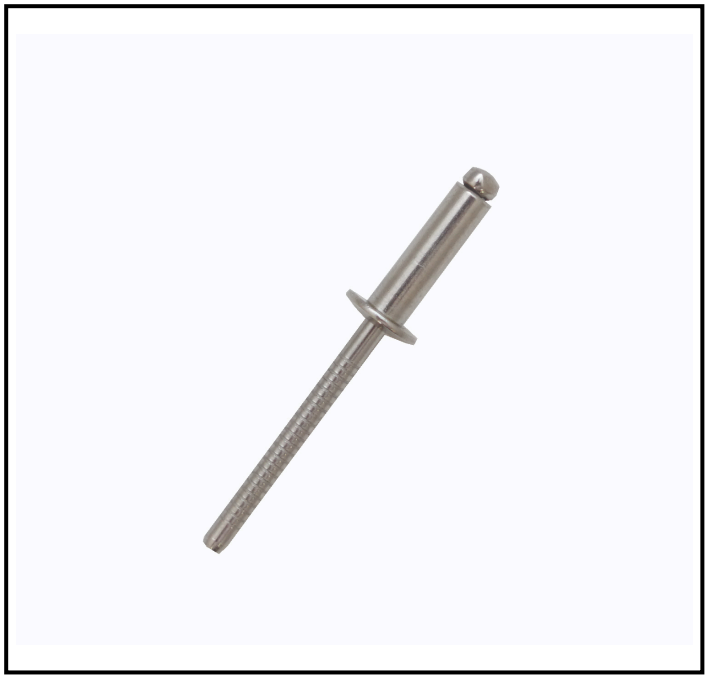

FEATURES

- **Dome Head:** Provides a neat and professional finish.
- **Stainless Steel Material:** Offers excellent corrosion resistance and durability.
- **3.2 mm Rivet Diameter:** Suitable for a wide range of applications.
- **16 mm Rivet Length:** Accommodates materials with a maximum grip of 12 mm.
- **Blind Rivet Design:** Allows for installation from one side of the workpiece.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality stainless steel blind rivet designed for secure fastening in various industrial applications. This rivet is ideal for situations where access is only possible from one side of the workpiece, providing a reliable and durable solution.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Stainless Steel
Maximum Grip	12 mm
Minimum Grip	9 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	3.2 mm
Rivet Length	16 mm
Shear Strength	1800 N
Tensile Strength	2500 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

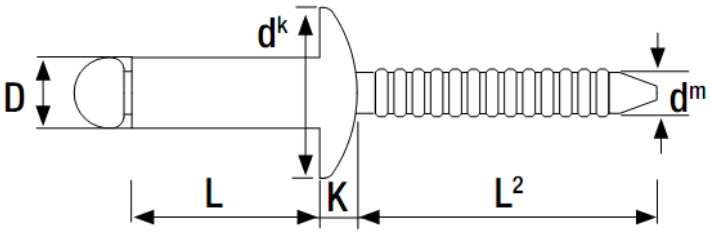



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.0	3.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	8.0	3.0	5.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	10.0	5.0	7.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	12.0	7.0	9.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	14.0	9.0	11.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	16.0	9.0	12.0	3.3	6.5	0.8	2.00	26.0	1800	2500	800
	18.0	12.0	14.5	3.3	6.5	0.8	2.00	26.0	1800	2500	500
4.0	6.0	1.0	2.0	4.1	8.0	1.0	2.50	27.0	3100	3800	1000
	8.0	2.0	4.0	4.1	8.0	1.0	2.50	27.0	3100	3800	800
	10.0	4.0	6.0	4.1	8.0	1.0	2.50	27.0	3100	3800	800
	12.0	6.0	8.0	4.1	8.0	1.0	2.50	27.0	3100	3800	800
	14.0	8.0	10.0	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	16.0	9.5	12.0	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	18.0	12.0	14.0	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	25.0	16.0	20.0	4.1	8.0	1.0	2.50	27.0	3100	3800	250