
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 3.2 mm Diameter x 18 mm long

Supplier Part Number: OJSSD3218

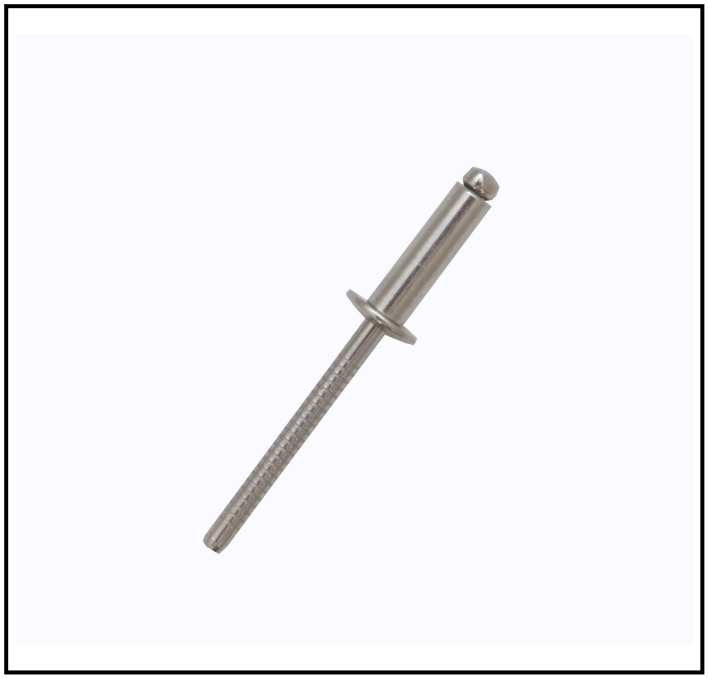

FEATURES

- **Rivet Diameter:** 3.2 mm for precise fitting in standard holes
- **Rivet Length:** 18 mm to accommodate a range of material thicknesses
- **Head Type:** Dome for a neat and flush finish
- **Mandrel Material:** Stainless Steel for enhanced strength and corrosion resistance
- **Maximum Grip:** 14.5 mm for versatile application
- **Minimum Grip:** 12 mm for secure fastening in thinner materials
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality and reliability

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 3.2 mm Blind Rivet is designed for secure fastening in various industrial applications. Made from high-quality stainless steel, it offers excellent corrosion resistance and durability. Ideal for use in environments where access is only possible from one side, this blind rivet ensures a reliable and strong joint.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Stainless Steel
Maximum Grip	14.5 mm
Minimum Grip	12 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	3.2 mm
Rivet Length	18 mm
Shear Strength	1800 N
Tensile Strength	2500 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

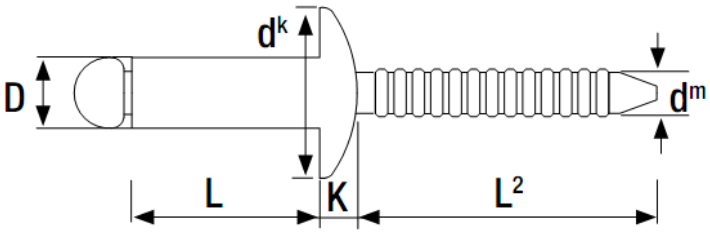



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.0	3.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	8.0	3.0	5.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	10.0	5.0	7.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	12.0	7.0	9.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	14.0	9.0	11.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	16.0	9.0	12.0	3.3	6.5	0.8	2.00	26.0	1800	2500	800
	18.0	12.0	14.5	3.3	6.5	0.8	2.00	26.0	1800	2500	500
4.0	6.0	1.0	2.0	4.1	8.0	1.0	2.50	27.0	3100	3800	1000
	8.0	2.0	4.0	4.1	8.0	1.0	2.50	27.0	3100	3800	800
	10.0	4.0	6.0	4.1	8.0	1.0	2.50	27.0	3100	3800	800
	12.0	6.0	8.0	4.1	8.0	1.0	2.50	27.0	3100	3800	800
	14.0	8.0	10.0	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	16.0	9.5	12.0	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	18.0	12.0	14.0	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	25.0	16.0	20.0	4.1	8.0	1.0	2.50	27.0	3100	3800	250