
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 4 mm Diameter x 20 mm long

Supplier Part Number: OJSSD4020

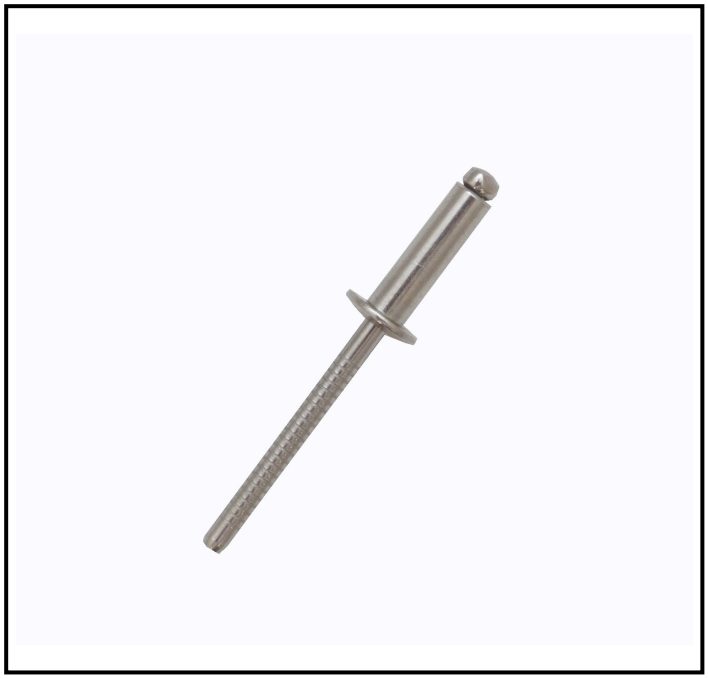

FEATURES

- **Stainless Steel Construction:** Provides excellent corrosion resistance and durability.
- **Blind Rivet Design:** Allows for installation from one side, ideal for inaccessible areas.
- **Dome Head Type:** Offers a neat and finished appearance.
- **Wide Grip Range:** Accommodates material thicknesses from 14 mm to 15.5 mm.
- **Compliance with Standards:** Meets DIN 7337 and ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality stainless steel blind rivet designed for secure fastening in various industrial applications. With a 4 mm diameter and a 20 mm length, this rivet is ideal for joining materials where access is only possible from one side. Its robust construction ensures durability and resistance to corrosion, making it suitable for demanding environments.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Stainless Steel
Maximum Grip	15.5 mm
Minimum Grip	14 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4 mm
Rivet Length	20 mm
Shear Strength	3100 N
Tensile Strength	3800 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

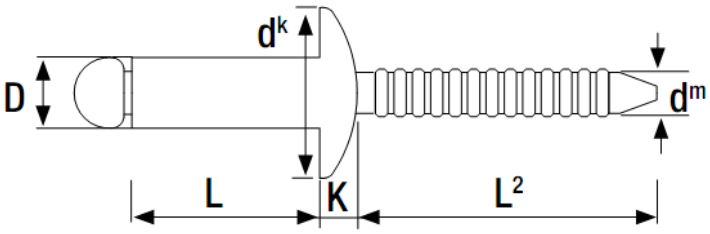



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.0	3.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	8.0	3.0	5.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	10.0	5.0	7.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	12.0	7.0	9.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	14.0	9.0	11.0	3.3	6.5	0.8	2.00	26.0	1800	2500	1000
	16.0	9.0	12.0	3.3	6.5	0.8	2.00	26.0	1800	2500	800
	18.0	12.0	14.5	3.3	6.5	0.8	2.00	26.0	1800	2500	500
4.0	6.0	1.0	2.0	4.1	8.0	1.0	2.50	27.0	3100	3800	1000
	8.0	2.0	4.0	4.1	8.0	1.0	2.50	27.0	3100	3800	800
	10.0	4.0	6.0	4.1	8.0	1.0	2.50	27.0	3100	3800	800
	12.0	6.0	8.0	4.1	8.0	1.0	2.50	27.0	3100	3800	800
	14.0	8.0	10.0	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	16.0	9.5	12.0	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	18.0	12.0	14.0	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.50	27.0	3100	3800	500
	25.0	16.0	20.0	4.1	8.0	1.0	2.50	27.0	3100	3800	250