
# RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 4.8 mm Diameter x 25 mm long

Supplier Part Number: OJSSD4825

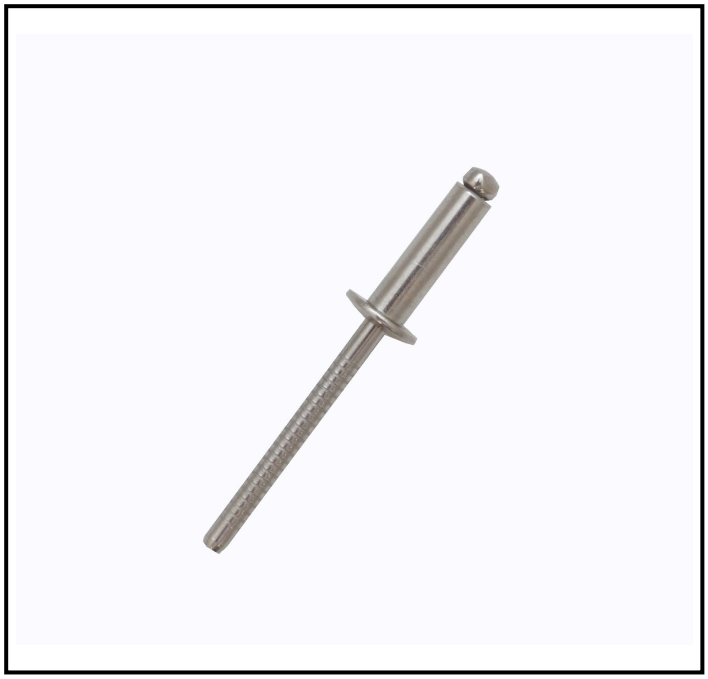

## FEATURES

- **Dome Head:** Provides a smooth and aesthetically pleasing finish.
- **Stainless Steel Mandrel:** Ensures excellent corrosion resistance and strength.
- **Rivet Diameter:** 4.8 mm for compatibility with standard drill sizes.
- **Rivet Length:** 25 mm to accommodate a range of material thicknesses.
- **Maximum Grip:** 20 mm for versatile application in various assemblies.
- **Minimum Grip:** 17 mm for secure fastening in thinner materials.
- **Compliance:** Meets DIN 7337 and ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO offers a high-quality 4.8 mm blind rivet made from durable stainless steel, designed for secure fastening in a variety of applications. This rivet is ideal for use where access is only available from one side, providing a reliable and efficient solution for joining materials.

## General Specifications

| | |
|---|---|
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.9 mm |
| Mandrel Material | Stainless Steel |
| Maximum Grip | 20 mm |
| Minimum Grip | 17 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 9.5 mm |
| Rivet Body Material | Stainless Steel |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 25 mm |
| Shear Strength | 4500 N |
| Tensile Strength | 6000 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Additional Image 1

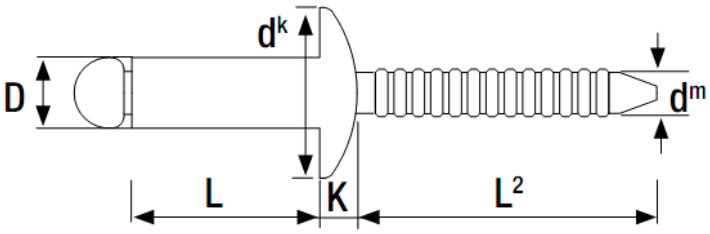

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 4.8 | 8.0 | 1.5 | 4.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 500 |
| | 10.0 | 4.0 | 6.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 500 |
| | 12.0 | 6.0 | 8.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 500 |
| | 14.0 | 8.0 | 9.5 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 500 |
| | 16.0 | 9.5 | 11.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 400 |
| | 18.0 | 11.0 | 13.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 400 |
| | 20.0 | 13.0 | 15.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 350 |
| | 22.0 | 15.0 | 17.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 300 |
| | 25.0 | 17.0 | 20.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 250 |
| | 27.0 | 18.0 | 22.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 250 |
| | 30.0 | 21.0 | 25.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 4500 | 6000 | 250 |
| 6.0 | 10.0 | 1.5 | 4.0 | 6.1 | 12.0 | 1.5 | 3.60 | 30.0 | 6500 | 8850 | 250 |
| | 12.0 | 4.0 | 6.0 | 6.1 | 12.0 | 1.5 | 3.60 | 30.0 | 6500 | 8850 | 200 |
| | 15.0 | 6.0 | 9.0 | 6.1 | 12.0 | 1.5 | 3.60 | 30.0 | 6500 | 8850 | 200 |
| | 18.0 | 9.0 | 12.0 | 6.1 | 12.0 | 1.5 | 3.60 | 30.0 | 6500 | 8850 | 200 |
| | 20.0 | 11.0 | 14.0 | 6.1 | 12.0 | 1.5 | 3.60 | 30.0 | 6500 | 8850 | 200 |
| | 22.0 | 12.0 | 16.0 | 6.1 | 12.0 | 1.5 | 3.60 | 30.0 | 6500 | 8850 | 200 |
| | 25.0 | 16.0 | 19.0 | 6.1 | 12.0 | 1.5 | 3.60 | 30.0 | 6500 | 8850 | 100 |

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 6.4 | 10.0 | 1.5 | 3.5 | 6.5 | 13.0 | 1.8 | 3.85 | 32.0 | 6500 | 8850 | 250 |
| | 12.0 | 3.5 | 5.5 | 6.5 | 13.0 | 1.8 | 3.85 | 32.0 | 6500 | 8850 | 250 |
| | 15.0 | 5.5 | 8.5 | 6.5 | 13.0 | 1.8 | 3.85 | 32.0 | 6500 | 8850 | 200 |
| | 18.0 | 8.5 | 11.5 | 6.5 | 13.0 | 1.8 | 3.85 | 32.0 | 6500 | 8850 | 200 |
| | 20.0 | 11.5 | 13.5 | 6.5 | 13.0 | 1.8 | 3.85 | 32.0 | 6500 | 8850 | 150 |
| | 25.0 | 13.5 | 18.0 | 6.5 | 13.0 | 1.8 | 3.85 | 32.0 | 6500 | 8850 | 150 |