
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 4.8 mm Diameter x 30 mm long

Supplier Part Number: OJSSD4830

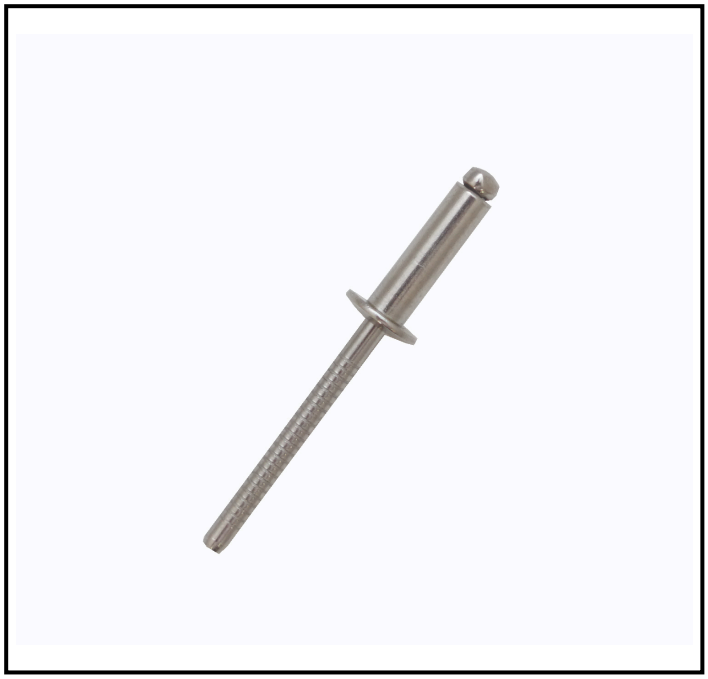

FEATURES

- **Dome Head:** Provides a smooth finish and distributes load evenly.
- **Stainless Steel Construction:** Ensures high corrosion resistance and durability.
- **Maximum Grip Range of 25 mm:** Suitable for a wide range of material thicknesses.
- **Minimum Grip Range of 21 mm:** Allows for use in thinner materials.
- **Rivet Length of 30 mm:** Accommodates various application requirements.
- **Fixing Hole Diameter of 4.9 mm:** Ensures a secure fit.
- **Compliance with DIN 7337:** Meets industry standards for quality and reliability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Blind Rivet is designed for secure fastening in applications where access is only available from one side. Made from high-quality stainless steel, it offers excellent corrosion resistance and durability, making it ideal for demanding environments.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Stainless Steel
Maximum Grip	25 mm
Minimum Grip	21 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4.8 mm
Rivet Length	30 mm
Shear Strength	4500 N
Tensile Strength	6000 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

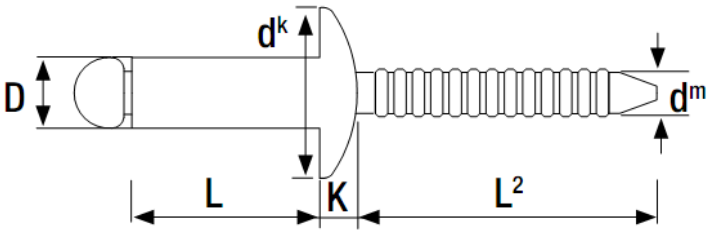



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	8.0	1.5	4.0	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	10.0	4.0	6.0	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	12.0	6.0	8.0	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	14.0	8.0	9.5	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	16.0	9.5	11.0	4.9	9.5	1.1	2.90	28.0	4500	6000	400
	18.0	11.0	13.0	4.9	9.5	1.1	2.90	28.0	4500	6000	400
	20.0	13.0	15.0	4.9	9.5	1.1	2.90	28.0	4500	6000	350
	22.0	15.0	17.0	4.9	9.5	1.1	2.90	28.0	4500	6000	300
	25.0	17.0	20.0	4.9	9.5	1.1	2.90	28.0	4500	6000	250
	27.0	18.0	22.0	4.9	9.5	1.1	2.90	28.0	4500	6000	250
	30.0	21.0	25.0	4.9	9.5	1.1	2.90	28.0	4500	6000	250
6.0	10.0	1.5	4.0	6.1	12.0	1.5	3.60	30.0	6500	8850	250
	12.0	4.0	6.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	15.0	6.0	9.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	18.0	9.0	12.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	20.0	11.0	14.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	22.0	12.0	16.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	25.0	16.0	19.0	6.1	12.0	1.5	3.60	30.0	6500	8850	100

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.4	10.0	1.5	3.5	6.5	13.0	1.8	3.85	32.0	6500	8850	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	6500	8850	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	6500	8850	200
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	6500	8850	200
	20.0	11.5	13.5	6.5	13.0	1.8	3.85	32.0	6500	8850	150
	25.0	13.5	18.0	6.5	13.0	1.8	3.85	32.0	6500	8850	150