
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 6.4 mm Diameter x 12 mm long

Supplier Part Number: OJSSD6412

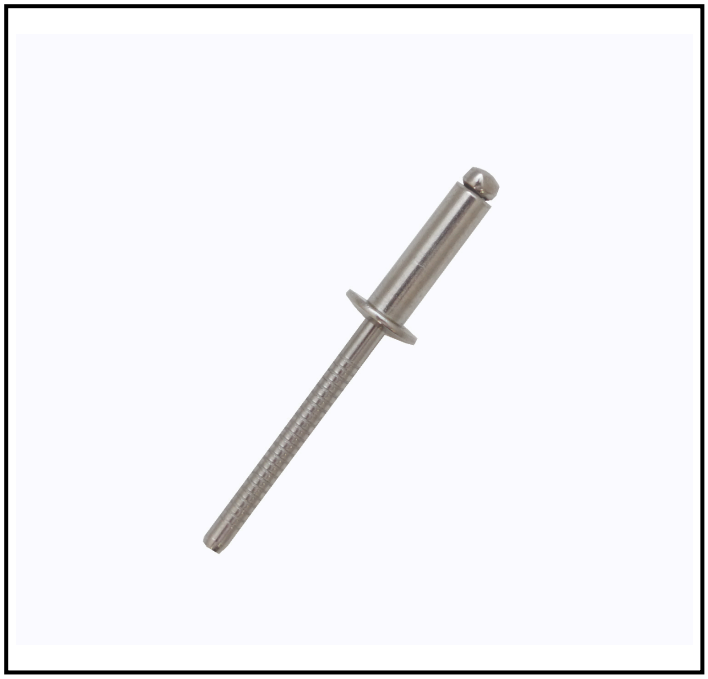

FEATURES

- **Dome Head:** Provides a smooth and aesthetically pleasing finish.
- **Stainless Steel Mandrel:** Offers excellent corrosion resistance and strength.
- **6.4 mm Rivet Diameter:** Suitable for a range of medium-duty applications.
- **12 mm Rivet Length:** Accommodates materials with varying thicknesses.
- **Maximum Grip of 5.5 mm:** Ensures a secure hold in thicker materials.
- **Minimum Grip of 3.5 mm:** Versatile for use with thinner materials.
- **Compliance with DIN 7337:** Meets industry standards for quality and reliability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality 6.4 mm blind rivet made from durable stainless steel. This rivet is designed for secure fastening in a variety of applications, providing reliable performance in demanding environments. Its stainless steel construction ensures resistance to corrosion and long-lasting durability.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.5 mm
Mandrel Material	Stainless Steel
Maximum Grip	5.5 mm
Minimum Grip	3.5 mm


Mechanical Specifications


Head Diameter	13 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	6.4 mm
Rivet Length	12 mm
Shear Strength	6500 N
Tensile Strength	8850 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

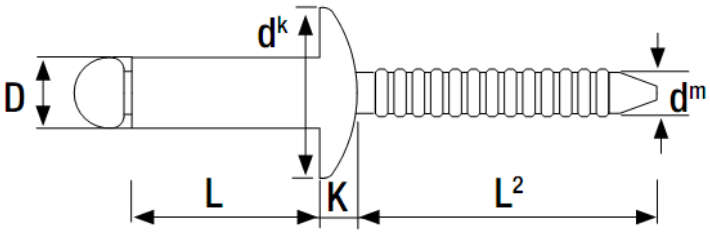



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	8.0	1.5	4.0	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	10.0	4.0	6.0	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	12.0	6.0	8.0	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	14.0	8.0	9.5	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	16.0	9.5	11.0	4.9	9.5	1.1	2.90	28.0	4500	6000	400
	18.0	11.0	13.0	4.9	9.5	1.1	2.90	28.0	4500	6000	400
	20.0	13.0	15.0	4.9	9.5	1.1	2.90	28.0	4500	6000	350
	22.0	15.0	17.0	4.9	9.5	1.1	2.90	28.0	4500	6000	300
	25.0	17.0	20.0	4.9	9.5	1.1	2.90	28.0	4500	6000	250
	27.0	18.0	22.0	4.9	9.5	1.1	2.90	28.0	4500	6000	250
	30.0	21.0	25.0	4.9	9.5	1.1	2.90	28.0	4500	6000	250
6.0	10.0	1.5	4.0	6.1	12.0	1.5	3.60	30.0	6500	8850	250
	12.0	4.0	6.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	15.0	6.0	9.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	18.0	9.0	12.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	20.0	11.0	14.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	22.0	12.0	16.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	25.0	16.0	19.0	6.1	12.0	1.5	3.60	30.0	6500	8850	100

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.4	10.0	1.5	3.5	6.5	13.0	1.8	3.85	32.0	6500	8850	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	6500	8850	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	6500	8850	200
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	6500	8850	200
	20.0	11.5	13.5	6.5	13.0	1.8	3.85	32.0	6500	8850	150
	25.0	13.5	18.0	6.5	13.0	1.8	3.85	32.0	6500	8850	150