
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 6.4 mm Diameter x 25 mm long

Supplier Part Number: OJSSD6425

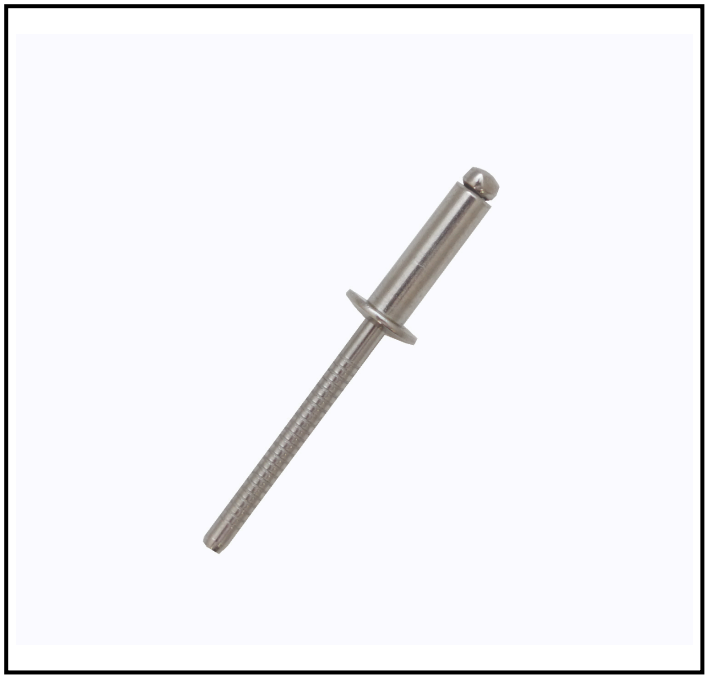

FEATURES

- **Dome Head:** Provides a smooth finish and distributes load evenly.
- **Stainless Steel Body:** Ensures high corrosion resistance and longevity.
- **6.4 mm Diameter:** Suitable for a range of medium-duty applications.
- **25 mm Length:** Accommodates a variety of material thicknesses.
- **Maximum Grip Range of 18 mm:** Versatile for different assembly needs.
- **Minimum Grip Range of 13.5 mm:** Offers flexibility in fastening.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 6.4 mm Blind Rivet is designed for secure fastening in applications where access is only available from one side. Made from high-quality stainless steel, this rivet offers excellent corrosion resistance and durability, making it ideal for both indoor and outdoor use.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.5 mm
Mandrel Material	Stainless Steel
Maximum Grip	18 mm
Minimum Grip	13.5 mm


Mechanical Specifications


Head Diameter	13 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	6.4 mm
Rivet Length	25 mm
Shear Strength	6500 N
Tensile Strength	8850 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

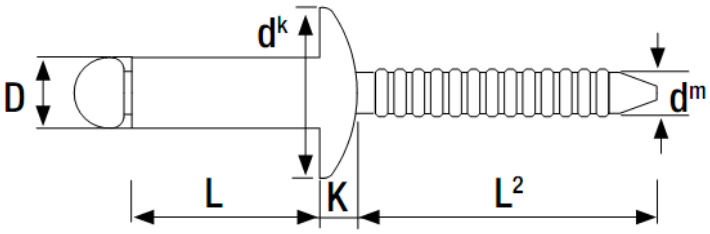



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	8.0	1.5	4.0	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	10.0	4.0	6.0	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	12.0	6.0	8.0	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	14.0	8.0	9.5	4.9	9.5	1.1	2.90	28.0	4500	6000	500
	16.0	9.5	11.0	4.9	9.5	1.1	2.90	28.0	4500	6000	400
	18.0	11.0	13.0	4.9	9.5	1.1	2.90	28.0	4500	6000	400
	20.0	13.0	15.0	4.9	9.5	1.1	2.90	28.0	4500	6000	350
	22.0	15.0	17.0	4.9	9.5	1.1	2.90	28.0	4500	6000	300
	25.0	17.0	20.0	4.9	9.5	1.1	2.90	28.0	4500	6000	250
	27.0	18.0	22.0	4.9	9.5	1.1	2.90	28.0	4500	6000	250
	30.0	21.0	25.0	4.9	9.5	1.1	2.90	28.0	4500	6000	250
6.0	10.0	1.5	4.0	6.1	12.0	1.5	3.60	30.0	6500	8850	250
	12.0	4.0	6.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	15.0	6.0	9.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	18.0	9.0	12.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	20.0	11.0	14.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	22.0	12.0	16.0	6.1	12.0	1.5	3.60	30.0	6500	8850	200
	25.0	16.0	19.0	6.1	12.0	1.5	3.60	30.0	6500	8850	100

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.4	10.0	1.5	3.5	6.5	13.0	1.8	3.85	32.0	6500	8850	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	6500	8850	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	6500	8850	200
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	6500	8850	200
	20.0	11.5	13.5	6.5	13.0	1.8	3.85	32.0	6500	8850	150
	25.0	13.5	18.0	6.5	13.0	1.8	3.85	32.0	6500	8850	150