
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 4.8 mm Diameter x 12 mm long

Supplier Part Number: OJSSDBU4812

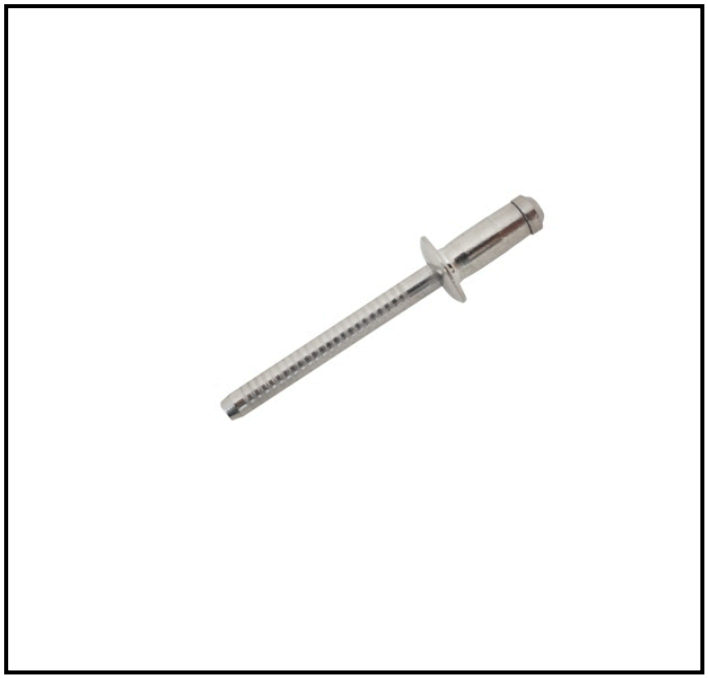

FEATURES

- **Rivet Diameter:** 4.8 mm for precise fitting in pre-drilled holes
- **Rivet Length:** 12 mm suitable for a range of material thicknesses
- **Mandrel Material:** Stainless steel for enhanced strength and corrosion resistance
- **Head Type:** Dome head for a smooth and professional finish
- **Grip Range:** 3.5 mm to 6 mm accommodating various material thicknesses
- **Standards Compliance:** Meets DIN 7337 and ISO standards ensuring quality and reliability

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Stainless Steel Blind Rivet is designed for secure fastening in various industrial applications. With a robust stainless steel construction, it offers excellent resistance to corrosion and is ideal for environments where durability is essential. This blind rivet is suitable for applications requiring a strong and reliable joint.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	5.1 mm
Mandrel Material	Stainless Steel
Maximum Grip	6 mm
Minimum Grip	3.5 mm


Mechanical Specifications


Head Diameter	9.6 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4.8 mm
Rivet Length	12 mm
Shear Strength	5500 N
Tensile Strength	5000 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

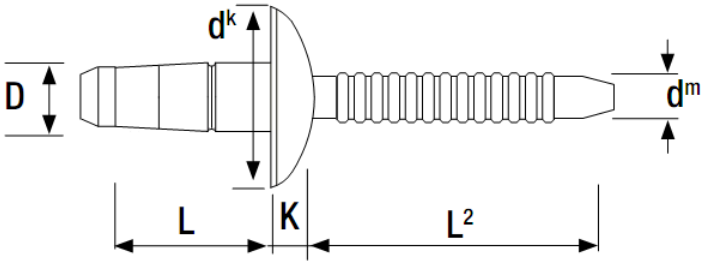



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.5	1.0	3.0	3.3-3.4	6.6	1.1	2.10	26.0	1600	2000	1000
	9.5	3.0	5.0	3.3-3.4	6.6	1.1	2.10	26.0	1700	2000	1000
	11.5	5.0	7.0	3.3-3.4	6.6	1.1	2.10	26.0	3200	2000	1000
4.0	7.5	1.0	3.0	4.1-4.3	8.0	1.1	2.60	27.0	2800	4000	500
	10.0	3.0	5.0	4.1-4.3	8.0	1.1	2.60	27.0	2800	4000	500
	12.5	5.0	7.0	4.1-4.3	8.0	1.1	2.60	27.0	2800	4000	500
4.8	10.0	1.5	3.5	4.1-4.3	8.0	1.1	2.60	27.0	5500	4000	500
	12.0	3.5	6.0	4.9-5.1	9.6	1.1	3.20	27.0	5500	5000	500
	14.5	6.0	8.5	4.9-5.1	9.6	1.1	3.20	27.0	5500	5000	500
	16.5	7.5	10.0	4.9-5.1	9.6	1.1	3.20	27.0	5500	5000	400