
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 4.8 mm Diameter x 14.5mm long

Supplier Part Number: OJSSDBU4814

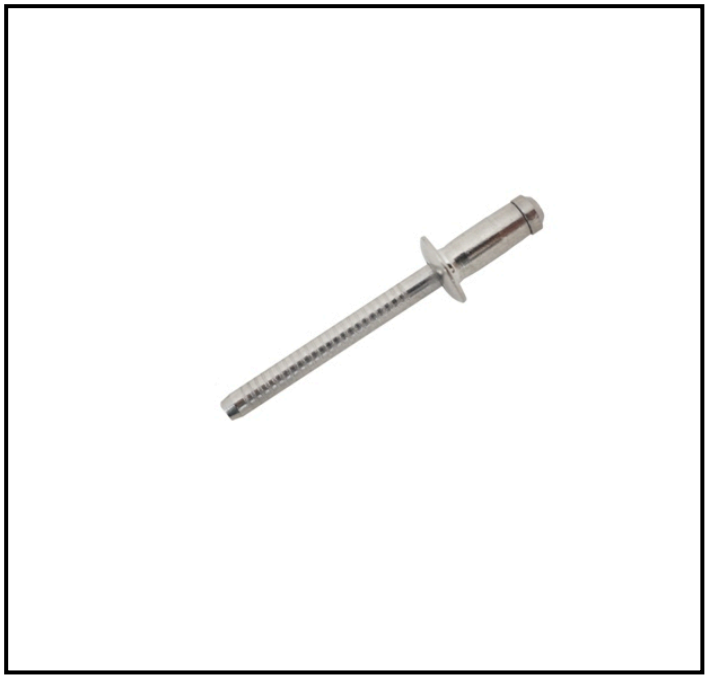

FEATURES

- **Rivet Diameter:** 4.8 mm for precise and consistent fastening
- **Rivet Length:** 14.5 mm suitable for a variety of material thicknesses
- **Head Type:** Dome head for a neat and flush finish
- **Mandrel Material:** Stainless steel mandrel for enhanced strength and durability
- **Maximum Grip:** 8.5 mm for accommodating thicker materials
- **Minimum Grip:** 6 mm for versatility in different applications
- **Fixing Hole Diameter:** 5.1 mm for easy installation
- **Rivet Body Material:** Stainless steel for superior corrosion resistance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Blind Rivet is designed for secure fastening in applications where access is limited to one side. Made from durable stainless steel, it provides excellent corrosion resistance and long-lasting performance. Ideal for use in construction, automotive, and industrial applications, this blind rivet ensures a strong and reliable joint.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	5.1 mm
Mandrel Material	Stainless Steel
Maximum Grip	8.5 mm
Minimum Grip	6 mm


Mechanical Specifications


Head Diameter	9.6 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4.8 mm
Rivet Length	14.5 mm
Shear Strength	5500 N
Tensile Strength	5000 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

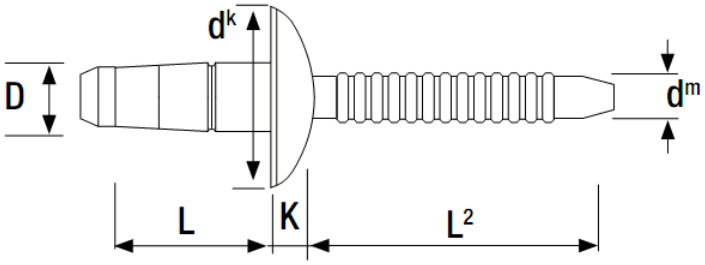



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.5	1.0	3.0	3.3-3.4	6.6	1.1	2.10	26.0	1600	2000	1000
	9.5	3.0	5.0	3.3-3.4	6.6	1.1	2.10	26.0	1700	2000	1000
	11.5	5.0	7.0	3.3-3.4	6.6	1.1	2.10	26.0	3200	2000	1000
4.0	7.5	1.0	3.0	4.1-4.3	8.0	1.1	2.60	27.0	2800	4000	500
	10.0	3.0	5.0	4.1-4.3	8.0	1.1	2.60	27.0	2800	4000	500
	12.5	5.0	7.0	4.1-4.3	8.0	1.1	2.60	27.0	2800	4000	500
4.8	10.0	1.5	3.5	4.1-4.3	8.0	1.1	2.60	27.0	5500	4000	500
	12.0	3.5	6.0	4.9-5.1	9.6	1.1	3.20	27.0	5500	5000	500
	14.5	6.0	8.5	4.9-5.1	9.6	1.1	3.20	27.0	5500	5000	500
	16.5	7.5	10.0	4.9-5.1	9.6	1.1	3.20	27.0	5500	5000	400