
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 3.2 mm Diameter x 10 mm long

Supplier Part Number: OJSSDM3210

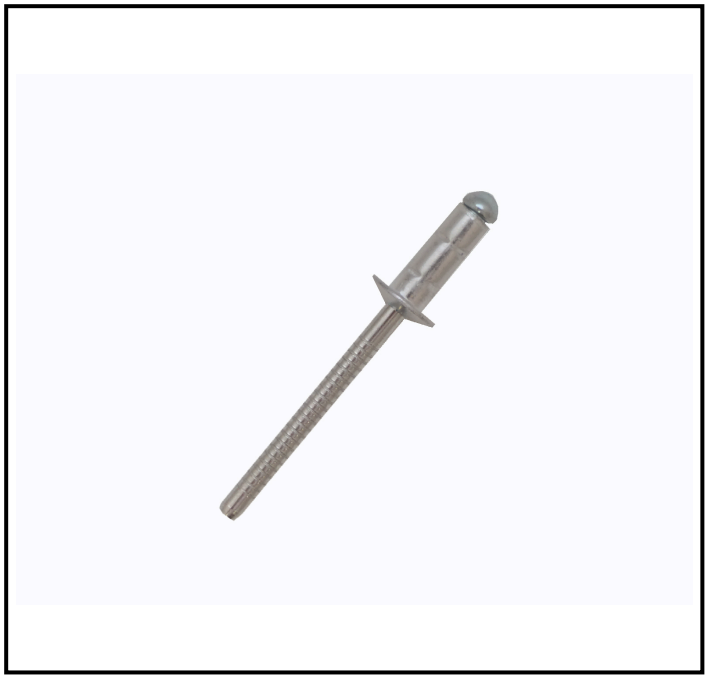

FEATURES

- **Dome Head:** Provides a neat and finished appearance.
- **Stainless Steel Body:** Offers excellent corrosion resistance and strength.
- **Stainless Steel Mandrel:** Ensures reliable and consistent fastening.
- **3.2 mm Diameter:** Suitable for a variety of fastening needs.
- **10 mm Length:** Accommodates a range of material thicknesses.
- **Wide Grip Range:** Supports materials with thicknesses from 3 mm to 6 mm.
- **Compliance with Standards:** Meets DIN 7337 and ISO standards for quality and environmental management.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Stainless Steel Blind Rivets are designed for secure fastening in applications where access is only available from one side. These rivets are ideal for use in environments requiring high corrosion resistance and durability, making them suitable for both indoor and outdoor applications.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Stainless Steel
Maximum Grip	6 mm
Minimum Grip	3 mm


Mechanical Specifications

Head Diameter	7.3 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	3.2 mm
Rivet Length	10 mm
Shear Strength	1450 N
Tensile Strength	2300 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

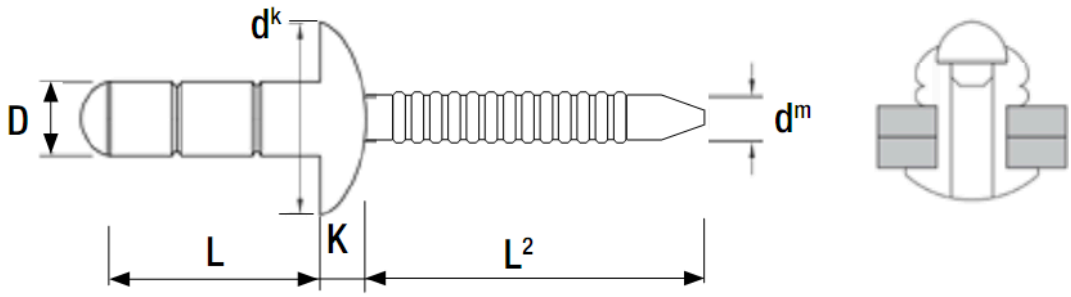

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	1.0	4.0	3.3	7.3	1.1	2.00	26.0	1450	2300	1000
	10.0	3.0	6.0	3.3	7.3	1.1	2.00	26.0	1450	2300	1000
	12.0	4.0	7.0	3.3	7.3	1.1	2.00	26.0	1450	2300	750
4.0	10.0	1.5	5.0	4.1	8.1	1.2	2.60	27.0	2650	3600	500
	12.0	3.5	7.0	4.1	8.1	1.2	2.60	27.0	2650	3600	500
	15.0	6.0	9.0	4.1	8.1	1.2	2.60	27.0	2650	3600	500
4.8	10.0	1.5	4.5	4.9	9.8	1.8	3.20	28.0	4000	5000	500
	12.0	3.0	6.5	4.9	9.8	1.8	3.20	28.0	4000	5000	500
	15.0	6.5	9.0	4.9	9.8	1.8	3.20	28.0	4000	5000	250
	17.5	9.0	12.5	4.9	9.8	1.8	3.20	28.0	4000	5000	250
6.4	13.0	3.5	5.5	6.5	12.7	2.2	3.85	32.0	7800	8800	200
	16.0	5.0	9.0	6.5	12.7	2.2	3.85	32.0	7800	8800	200
	20.0	5.5	12.5	6.5	12.7	2.2	3.85	32.0	7800	8800	200