
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 3.2 mm Diameter x 6 mm long

Supplier Part Number: OJSSDS3206

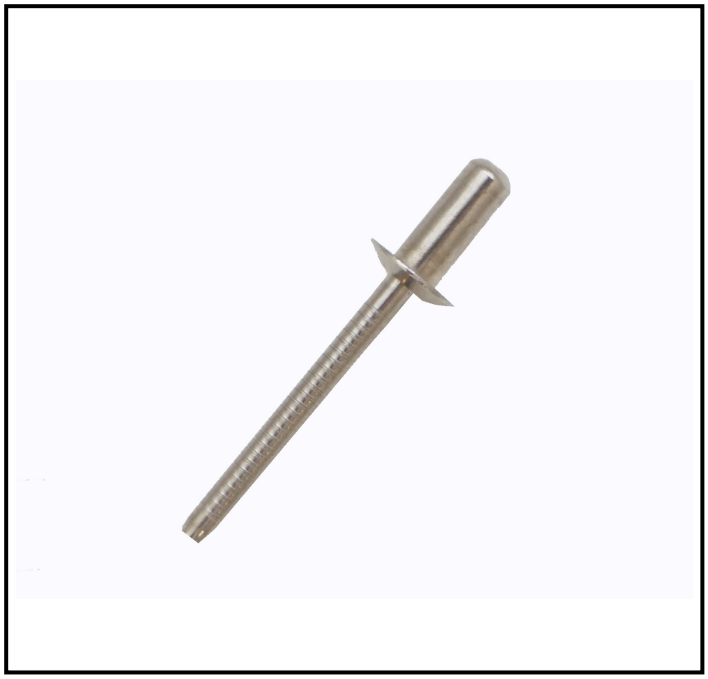

FEATURES

- **Dome Head:** Provides a smooth and aesthetically pleasing finish.
- **Stainless Steel Mandrel:** Offers excellent corrosion resistance and strength.
- **Sealed Design:** Ensures a watertight seal, ideal for applications requiring moisture resistance.
- **3.2 mm Rivet Diameter:** Suitable for a range of medium-duty applications.
- **6 mm Rivet Length:** Accommodates materials with varying thicknesses.
- **Wide Grip Range:** Supports a grip range from 0.5 mm to 1.5 mm for versatile use.
- **Compliance with Standards:** Meets DIN 7337 and ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a 3.2 mm sealed blind rivet made from high-quality stainless steel, designed for secure fastening in various industrial applications. This rivet provides a reliable solution for joining materials where access is limited to one side, ensuring a tight and durable connection.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Sealed Blind Rivet
Fixing Hole Diameter	3.3 mm
Mandrel Material	Stainless Steel
Maximum Grip	1.5 mm
Minimum Grip	0.5 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	3.2 mm
Rivet Length	6 mm
Shear Strength	2000 N
Tensile Strength	2500 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

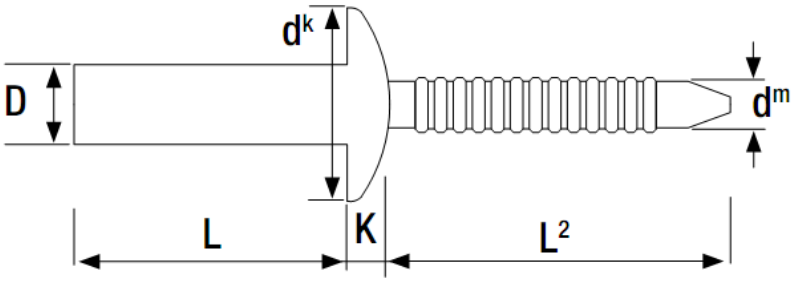



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	0.5	1.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	8.0	1.5	3.0	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	9.5	3.0	4.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	12.0	4.5	6.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	14.0	6.5	8.0	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
4.0	6.0	0.5	1.5	4.1	8.0	1.3	2.30	27.0	3000	4000	500
	8.0	1.5	3.0	4.1	8.0	1.3	2.30	27.0	3000	4000	800
	9.5	3.0	5.0	4.1	8.0	1.3	2.30	27.0	3000	4000	500
	12.0	5.0	6.5	4.1	8.0	1.3	2.30	27.0	3000	4000	800
	16.0	6.5	10.0	4.1	8.0	1.3	2.30	27.0	3000	4000	500
4.8	8.0	1.0	3.0	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	9.5	3.0	4.5	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	12.0	4.5	6.0	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	16.0	6.5	9.0	4.9	9.5	1.6	2.90	28.0	4500	5500	400
	20.0	9.0	12.0	4.9	9.5	1.6	2.90	28.0	4500	5500	350
6.4	14.0	3.5	6.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250
	15.0	4.5	8.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250
	20.0	8.0	12.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250