
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 4 mm Diameter x 6 mm long

Supplier Part Number: OJSSDS4006

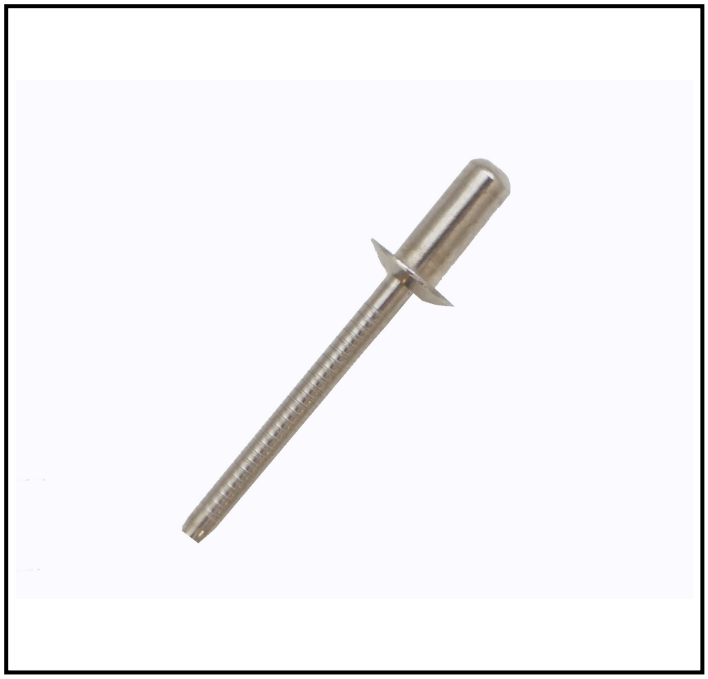

FEATURES

- **Stainless Steel Construction:** Ensures durability and resistance to corrosion.
- **Sealed Design:** Provides a watertight seal, preventing leaks and contamination.
- **Dome Head Type:** Offers a smooth, finished appearance.
- **Wide Grip Range:** Accommodates materials with thicknesses from 0.5 mm to 1.5 mm.
- **DIN 7337 Compliant:** Meets industry standards for quality and performance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality 4 mm sealed blind rivet made from durable stainless steel, designed for secure fastening in various applications. This rivet is ideal for situations where a strong, reliable hold is required, providing excellent resistance to corrosion and environmental factors.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Sealed Blind Rivet
Fixing Hole Diameter	4.1 mm
Mandrel Material	Stainless Steel
Maximum Grip	1.5 mm
Minimum Grip	0.5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4 mm
Rivet Length	6 mm
Shear Strength	3000 N
Tensile Strength	4000 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

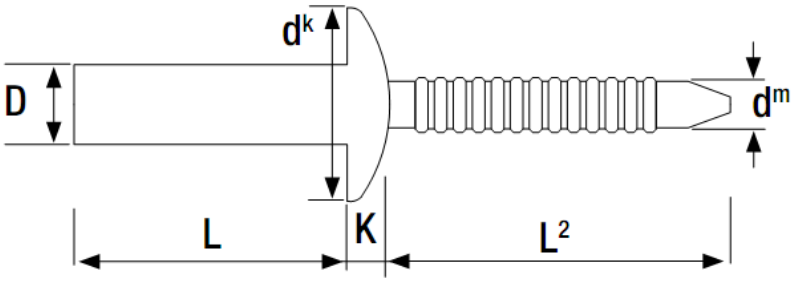



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	0.5	1.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	8.0	1.5	3.0	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	9.5	3.0	4.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	12.0	4.5	6.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	14.0	6.5	8.0	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
4.0	6.0	0.5	1.5	4.1	8.0	1.3	2.30	27.0	3000	4000	500
	8.0	1.5	3.0	4.1	8.0	1.3	2.30	27.0	3000	4000	800
	9.5	3.0	5.0	4.1	8.0	1.3	2.30	27.0	3000	4000	500
	12.0	5.0	6.5	4.1	8.0	1.3	2.30	27.0	3000	4000	800
	16.0	6.5	10.0	4.1	8.0	1.3	2.30	27.0	3000	4000	500
4.8	8.0	1.0	3.0	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	9.5	3.0	4.5	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	12.0	4.5	6.0	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	16.0	6.5	9.0	4.9	9.5	1.6	2.90	28.0	4500	5500	400
	20.0	9.0	12.0	4.9	9.5	1.6	2.90	28.0	4500	5500	350
6.4	14.0	3.5	6.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250
	15.0	4.5	8.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250
	20.0	8.0	12.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250