
# RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 4 mm Diameter x 8 mm long

Supplier Part Number: OJSSDS4008

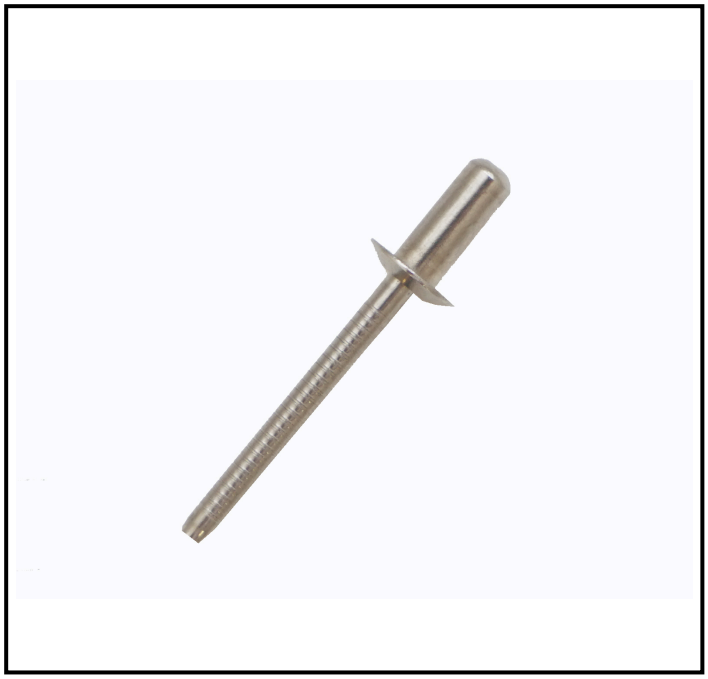

## FEATURES

- **Rivet Diameter:** 4 mm for precise and consistent fastening
- **Rivet Length:** 8 mm suitable for a range of material thicknesses
- **Head Type:** Dome for a smooth, finished appearance
- **Mandrel Material:** Stainless Steel for enhanced strength and corrosion resistance
- **Rivet Body Material:** Stainless Steel for long-lasting durability
- **Maximum Grip:** 3 mm allowing for versatile application
- **Minimum Grip:** 1.5 mm ensuring compatibility with thinner materials
- **Sealed Design:** Prevents leakage and contamination

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

This RS PRO Stainless Steel Sealed Blind Rivet is designed for secure fastening in applications where access is limited to one side. With a 4 mm diameter and 8 mm length, it is ideal for creating strong, reliable joints in various industrial settings. The use of stainless steel for both the rivet body and mandrel ensures excellent corrosion resistance and durability.

## General Specifications

| | |
|---|---|
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Sealed Blind Rivet |
| Fixing Hole Diameter | 4.1 mm |
| Mandrel Material | Stainless Steel |
| Maximum Grip | 3 mm |
| Minimum Grip | 1.5 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 8 mm |
| Rivet Body Material | Stainless Steel |
| Rivet Diameter | 4 mm |
| Rivet Length | 8 mm |
| Shear Strength | 3000 N |
| Tensile Strength | 4000 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Technical Diagrams

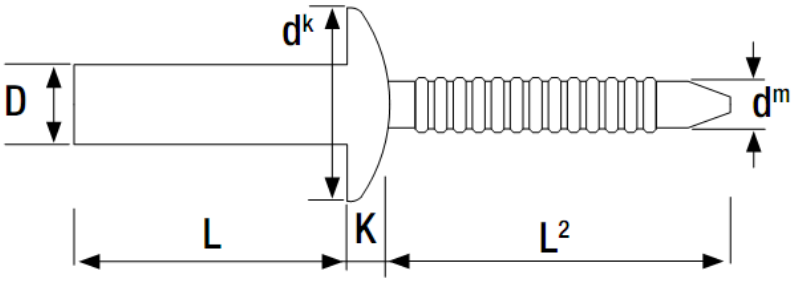

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| **3.2** | 6.0 | 0.5 | 1.5 | 3.3 | 6.0 | 0.9 | 1.90 | 26.0 | 2000 | 2500 | 1000 |
| | 8.0 | 1.5 | 3.0 | 3.3 | 6.0 | 0.9 | 1.90 | 26.0 | 2000 | 2500 | 1000 |
| | 9.5 | 3.0 | 4.5 | 3.3 | 6.0 | 0.9 | 1.90 | 26.0 | 2000 | 2500 | 1000 |
| | 12.0 | 4.5 | 6.5 | 3.3 | 6.0 | 0.9 | 1.90 | 26.0 | 2000 | 2500 | 1000 |
| | 14.0 | 6.5 | 8.0 | 3.3 | 6.0 | 0.9 | 1.90 | 26.0 | 2000 | 2500 | 1000 |
| **4.0** | 6.0 | 0.5 | 1.5 | 4.1 | 8.0 | 1.3 | 2.30 | 27.0 | 3000 | 4000 | 500 |
| | 8.0 | 1.5 | 3.0 | 4.1 | 8.0 | 1.3 | 2.30 | 27.0 | 3000 | 4000 | 800 |
| | 9.5 | 3.0 | 5.0 | 4.1 | 8.0 | 1.3 | 2.30 | 27.0 | 3000 | 4000 | 500 |
| | 12.0 | 5.0 | 6.5 | 4.1 | 8.0 | 1.3 | 2.30 | 27.0 | 3000 | 4000 | 800 |
| | 16.0 | 6.5 | 10.0 | 4.1 | 8.0 | 1.3 | 2.30 | 27.0 | 3000 | 4000 | 500 |
| **4.8** | 8.0 | 1.0 | 3.0 | 4.9 | 9.5 | 1.6 | 2.90 | 28.0 | 4500 | 5500 | 500 |
| | 9.5 | 3.0 | 4.5 | 4.9 | 9.5 | 1.6 | 2.90 | 28.0 | 4500 | 5500 | 500 |
| | 12.0 | 4.5 | 6.0 | 4.9 | 9.5 | 1.6 | 2.90 | 28.0 | 4500 | 5500 | 500 |
| | 16.0 | 6.5 | 9.0 | 4.9 | 9.5 | 1.6 | 2.90 | 28.0 | 4500 | 5500 | 400 |
| | 20.0 | 9.0 | 12.0 | 4.9 | 9.5 | 1.6 | 2.90 | 28.0 | 4500 | 5500 | 350 |
| **6.4** | 14.0 | 3.5 | 6.0 | 6.5 | 12.7 | 2.1 | 3.90 | 32.0 | 6800 | 8700 | 250 |
| | 15.0 | 4.5 | 8.0 | 6.5 | 12.7 | 2.1 | 3.90 | 32.0 | 6800 | 8700 | 250 |
| | 20.0 | 8.0 | 12.0 | 6.5 | 12.7 | 2.1 | 3.90 | 32.0 | 6800 | 8700 | 250 |