
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 4 mm Diameter x 16 mm long

Supplier Part Number: OJSSDS4016

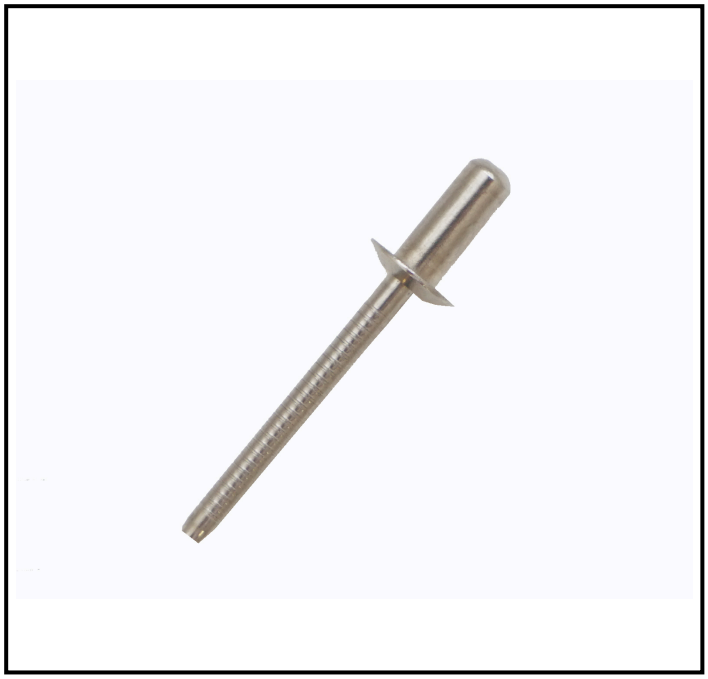

FEATURES

- **Rivet Diameter:** 4 mm for precise and secure fastening
- **Rivet Length:** 16 mm to accommodate various material thicknesses
- **Head Type:** Dome for a smooth and finished appearance
- **Mandrel Material:** Stainless Steel for enhanced strength and durability
- **Maximum Grip:** 10 mm for versatile application range
- **Minimum Grip:** 6.5 mm ensuring adaptability to different materials
- **Rivet Body Material:** Stainless Steel for superior corrosion resistance
- **Sealed Design:** Prevents leakage and contamination

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4 mm Sealed Blind Rivet is designed for secure fastening in applications where access is limited to one side of the workpiece. Made from durable stainless steel, this rivet offers excellent corrosion resistance and reliability, making it ideal for demanding environments.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Sealed Blind Rivet
Fixing Hole Diameter	4.1 mm
Mandrel Material	Stainless Steel
Maximum Grip	10 mm
Minimum Grip	6.5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4 mm
Rivet Length	16 mm
Shear Strength	3000 N
Tensile Strength	4000 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

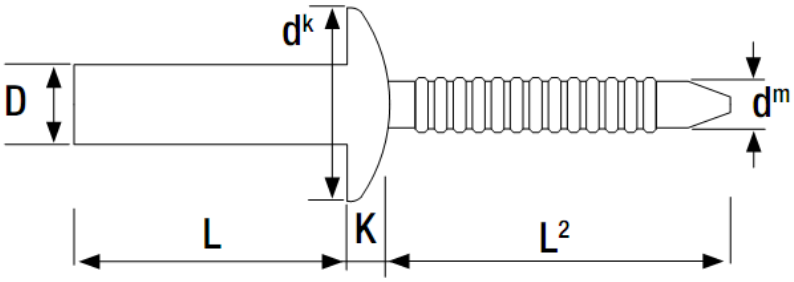



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	0.5	1.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	8.0	1.5	3.0	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	9.5	3.0	4.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	12.0	4.5	6.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	14.0	6.5	8.0	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
4.0	6.0	0.5	1.5	4.1	8.0	1.3	2.30	27.0	3000	4000	500
	8.0	1.5	3.0	4.1	8.0	1.3	2.30	27.0	3000	4000	800
	9.5	3.0	5.0	4.1	8.0	1.3	2.30	27.0	3000	4000	500
	12.0	5.0	6.5	4.1	8.0	1.3	2.30	27.0	3000	4000	800
	16.0	6.5	10.0	4.1	8.0	1.3	2.30	27.0	3000	4000	500
4.8	8.0	1.0	3.0	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	9.5	3.0	4.5	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	12.0	4.5	6.0	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	16.0	6.5	9.0	4.9	9.5	1.6	2.90	28.0	4500	5500	400
	20.0	9.0	12.0	4.9	9.5	1.6	2.90	28.0	4500	5500	350
6.4	14.0	3.5	6.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250
	15.0	4.5	8.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250
	20.0	8.0	12.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250