
RS PRO Stainless Steel/Stainless Steel Dome Head Blind Rivet, 6.4 mm Diameter x 15 mm long

Supplier Part Number: OJSSDS6415

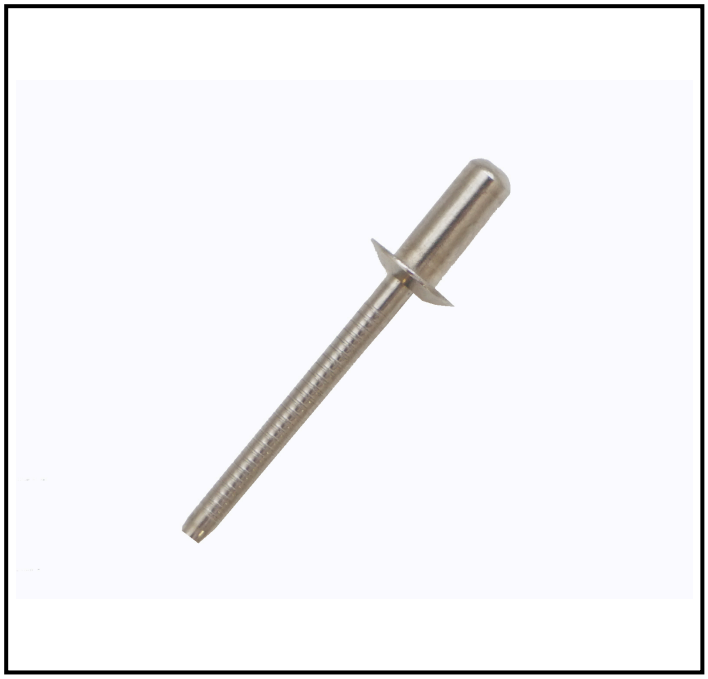

FEATURES

- **Dome Head:** Provides an aesthetically pleasing finish and distributes load evenly.
- **Stainless Steel Mandrel:** Offers superior strength and corrosion resistance.
- **Sealed Design:** Ensures a watertight seal, preventing leakage and contamination.
- **Wide Grip Range:** Accommodates material thicknesses from 4.5 mm to 8 mm.
- **High Tensile Strength:** Suitable for heavy-duty applications.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Sealed Blind Rivet is designed for secure fastening in various industrial applications. Made from high-quality stainless steel, it offers excellent corrosion resistance and durability. Ideal for applications requiring a strong, sealed connection, this rivet ensures reliable performance in demanding environments.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Sealed Blind Rivet
Fixing Hole Diameter	6.5 mm
Mandrel Material	Stainless Steel
Maximum Grip	8 mm
Minimum Grip	4.5 mm


Mechanical Specifications


Head Diameter	12.7 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	6.4 mm
Rivet Length	15 mm
Shear Strength	6800 N
Tensile Strength	8700 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

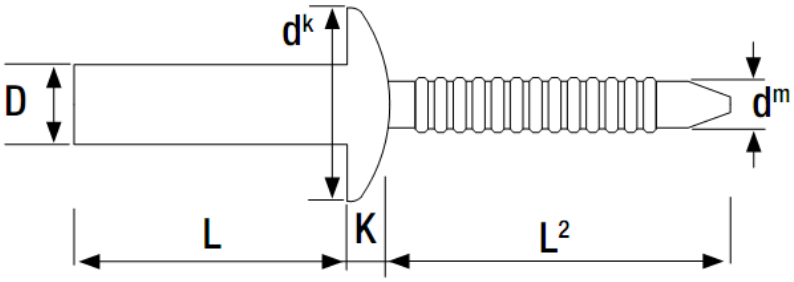



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	0.5	1.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	8.0	1.5	3.0	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	9.5	3.0	4.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	12.0	4.5	6.5	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
	14.0	6.5	8.0	3.3	6.0	0.9	1.90	26.0	2000	2500	1000
4.0	6.0	0.5	1.5	4.1	8.0	1.3	2.30	27.0	3000	4000	500
	8.0	1.5	3.0	4.1	8.0	1.3	2.30	27.0	3000	4000	800
	9.5	3.0	5.0	4.1	8.0	1.3	2.30	27.0	3000	4000	500
	12.0	5.0	6.5	4.1	8.0	1.3	2.30	27.0	3000	4000	800
	16.0	6.5	10.0	4.1	8.0	1.3	2.30	27.0	3000	4000	500
4.8	8.0	1.0	3.0	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	9.5	3.0	4.5	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	12.0	4.5	6.0	4.9	9.5	1.6	2.90	28.0	4500	5500	500
	16.0	6.5	9.0	4.9	9.5	1.6	2.90	28.0	4500	5500	400
	20.0	9.0	12.0	4.9	9.5	1.6	2.90	28.0	4500	5500	350
6.4	14.0	3.5	6.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250
	15.0	4.5	8.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250
	20.0	8.0	12.0	6.5	12.7	2.1	3.90	32.0	6800	8700	250