
RS PRO Stainless Steel Countersunk Head Blind Rivet, 4 mm Diameter x 20 mm long

Supplier Part Number: OJSSK4020

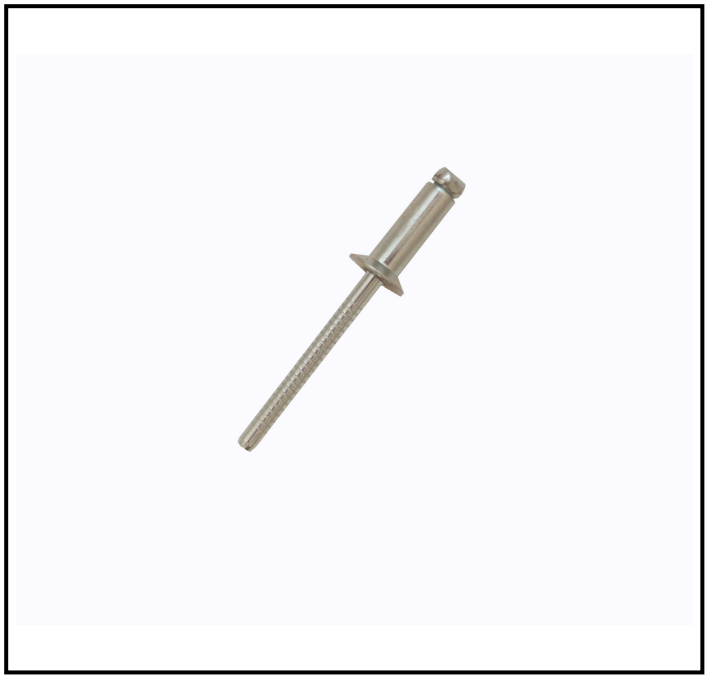

FEATURES

- **Rivet Diameter:** Ensures a precise fit with a 4 mm diameter.
- **Rivet Length:** Offers a 20 mm length for versatile applications.
- **Material:** Constructed from stainless steel for enhanced durability and corrosion resistance.
- **Head Type:** Countersunk head for a flush finish.
- **Grip Range:** Accommodates materials with a grip range of 14 mm to 16 mm.
- **Standards Compliance:** Meets DIN 7337 and various ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4 mm Blind Rivet is designed for secure fastening in applications where access is only available from one side. Made from durable stainless steel, it provides excellent corrosion resistance, making it ideal for use in harsh environments. This rivet is perfect for joining materials with a grip range between 14 mm and 16 mm.

General Specifications

Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Stainless Steel
Maximum Grip	16 mm
Minimum Grip	14 mm


Mechanical Specifications


Head Diameter	7.5 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4 mm
Rivet Length	20 mm
Shear Strength	3100 N
Tensile Strength	3800 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

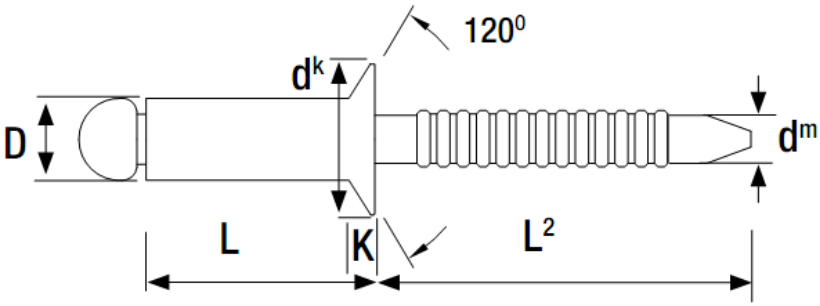



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.5	3.0	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
	8.0	3.0	5.0	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
	10.0	5.0	6.5	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
	12.0	6.5	8.5	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
	14.0	8.5	10.5	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
4.0	6.0	1.5	2.0	4.1	7.5	1.2	2.50	27.0	3100	3800	750
	8.0	2.0	4.0	4.1	7.5	1.2	2.50	27.0	3100	3800	750
	10.0	4.0	6.0	4.1	7.5	1.2	2.50	27.0	3100	3800	750
	12.0	6.0	8.0	4.1	7.5	1.2	2.50	27.0	3100	3800	750
	14.0	8.0	10.0	4.1	7.5	1.2	2.50	27.0	3100	3800	500
	16.0	10.0	12.0	4.1	7.5	1.2	2.50	27.0	3100	3800	500
	18.0	12.0	14.0	4.1	7.5	1.2	2.50	27.0	3100	3800	500
	20.0	14.0	16.0	4.1	7.5	1.2	2.50	27.0	3100	3800	500
4.8	8.0	1.5	3.5	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	10.0	3.5	5.5	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	12.0	5.5	7.5	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	14.0	7.5	9.5	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	16.0	9.0	11.0	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	18.0	11.0	13.0	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	20.0	13.0	15.0	4.9	9.0	1.5	3.00	28.0	4500	6000	250
	25.0	15.0	19.0	4.9	9.0	1.5	3.00	28.0	4500	6000	250