
RS PRO Stainless Steel/Stainless Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 20 mm long

Supplier Part Number: OJSSK4820

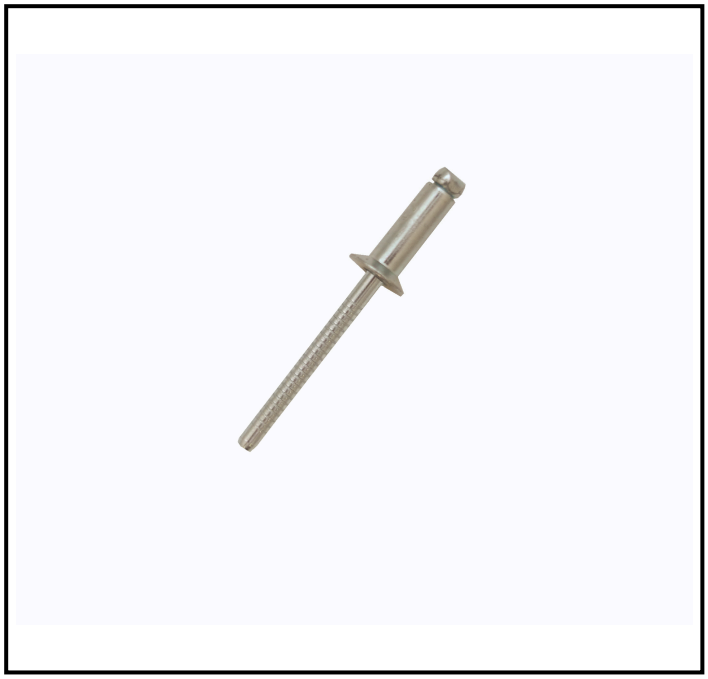

FEATURES

- **Rivet Diameter:** 4.8 mm diameter ensures a strong and stable fastening.
- **Rivet Length:** 20 mm length accommodates a wide range of material thicknesses.
- **Head Type:** Countersunk head provides a flush finish for a neat appearance.
- **Mandrel Material:** Stainless steel mandrel offers excellent durability and corrosion resistance.
- **Grip Range:** 13 mm to 15 mm grip range allows for versatile use in different material thicknesses.
- **Standards Compliance:** Meets DIN 7337 and various ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Blind Rivet is designed for secure and reliable fastening in various applications. Made from high-quality stainless steel, this rivet is ideal for environments where corrosion resistance is essential. Its blind design allows for installation from one side of the workpiece, making it perfect for applications with limited access.

General Specifications

Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Stainless Steel
Maximum Grip	15 mm
Minimum Grip	13 mm


Mechanical Specifications


Head Diameter	9 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4.8 mm
Rivet Length	20 mm
Shear Strength	4500 N
Tensile Strength	6000 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

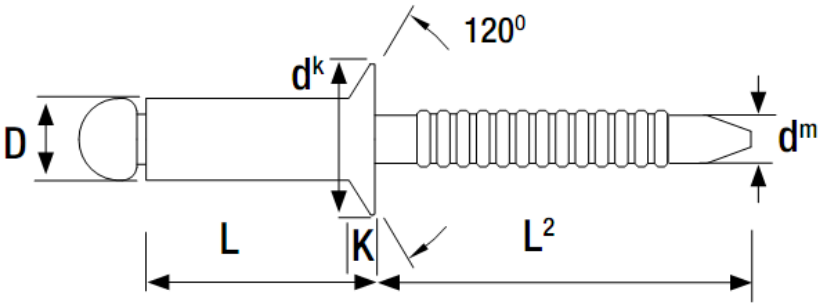



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.5	3.0	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
	8.0	3.0	5.0	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
	10.0	5.0	6.5	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
	12.0	6.5	8.5	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
	14.0	8.5	10.5	3.3	6.0	1.1	1.90	26.0	1800	2500	1000
4.0	6.0	1.5	2.0	4.1	7.5	1.2	2.50	27.0	3100	3800	750
	8.0	2.0	4.0	4.1	7.5	1.2	2.50	27.0	3100	3800	750
	10.0	4.0	6.0	4.1	7.5	1.2	2.50	27.0	3100	3800	750
	12.0	6.0	8.0	4.1	7.5	1.2	2.50	27.0	3100	3800	750
	14.0	8.0	10.0	4.1	7.5	1.2	2.50	27.0	3100	3800	500
	16.0	10.0	12.0	4.1	7.5	1.2	2.50	27.0	3100	3800	500
	18.0	12.0	14.0	4.1	7.5	1.2	2.50	27.0	3100	3800	500
	20.0	14.0	16.0	4.1	7.5	1.2	2.50	27.0	3100	3800	500
4.8	8.0	1.5	3.5	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	10.0	3.5	5.5	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	12.0	5.5	7.5	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	14.0	7.5	9.5	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	16.0	9.0	11.0	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	18.0	11.0	13.0	4.9	9.0	1.5	3.00	28.0	4500	6000	500
	20.0	13.0	15.0	4.9	9.0	1.5	3.00	28.0	4500	6000	250
	25.0	15.0	19.0	4.9	9.0	1.5	3.00	28.0	4500	6000	250