
RS PRO Stainless Steel Flange Head Blind Rivet, 3.2 mm Diameter x 6 mm long

Supplier Part Number: OJSSL3206

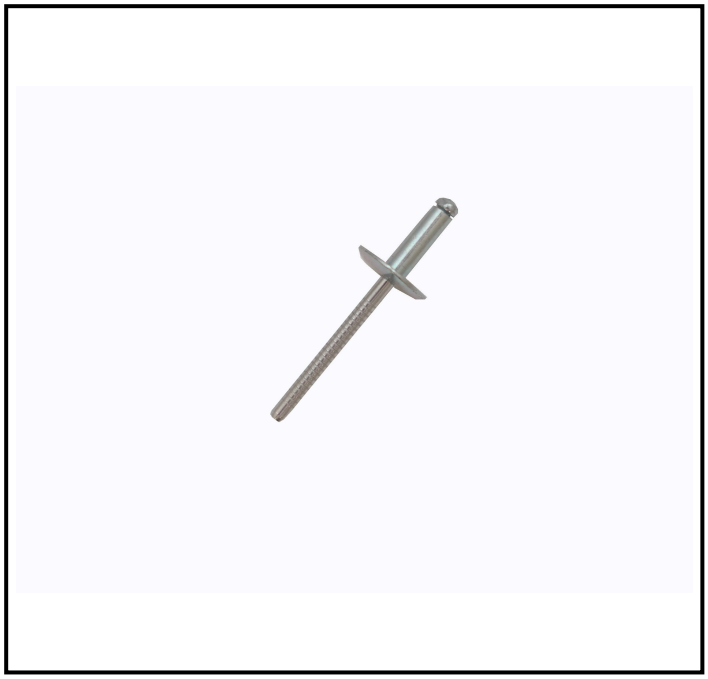

FEATURES

- **Flange Head:** Provides a larger bearing surface for increased load distribution.
- **Stainless Steel Construction:** Offers superior corrosion resistance for long-lasting durability.
- **Blind Rivet Design:** Allows for installation from one side of the workpiece, ideal for inaccessible areas.
- **3.2 mm Rivet Diameter:** Suitable for a range of hole sizes, ensuring versatile application.
- **6 mm Rivet Length:** Accommodates material thicknesses with a maximum grip of 3.5 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Stainless Steel Blind Rivets are designed for secure fastening in applications where access is limited to one side. These rivets are ideal for creating strong, reliable joints in a variety of materials, offering excellent resistance to corrosion due to their stainless steel construction.

General Specifications

Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Stainless Steel
Maximum Grip	3.5 mm
Minimum Grip	1 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	3.2 mm
Rivet Length	6 mm
Shear Strength	1875 N
Tensile Strength	2360 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

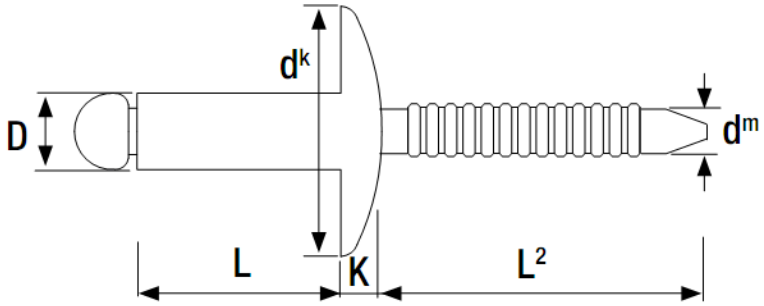



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
	6.0	1.0	3.5	3.3	9.5	1.3	1.90	26.0	1875	2360	1000
	8.0	3.5	5.0	3.3	9.5	1.3	1.90	26.0	1875	2360	1000
3.2	10.0	5.0	7.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	12.0	7.0	9.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	14.0	9.0	11.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	6.0	1.0	2.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	8.0	2.0	4.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
4.0	10.0	4.0	6.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	12.0	6.0	8.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	16.0	10.0	12.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	8.0	2.5	4.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	10.0	4.0	6.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	12.0	6.0	8.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
4.8	14.0	8.0	9.5	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	16.0	9.5	11.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	20.0	12.0	15.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	25.0	16.0	20.0	4.9	16.0	1.7	3.00	28.0	4230	5335	200