
RS PRO Stainless Steel Flange Head Blind Rivet, 3.2 mm Diameter x 14 mm long

Supplier Part Number: OJSSL3214

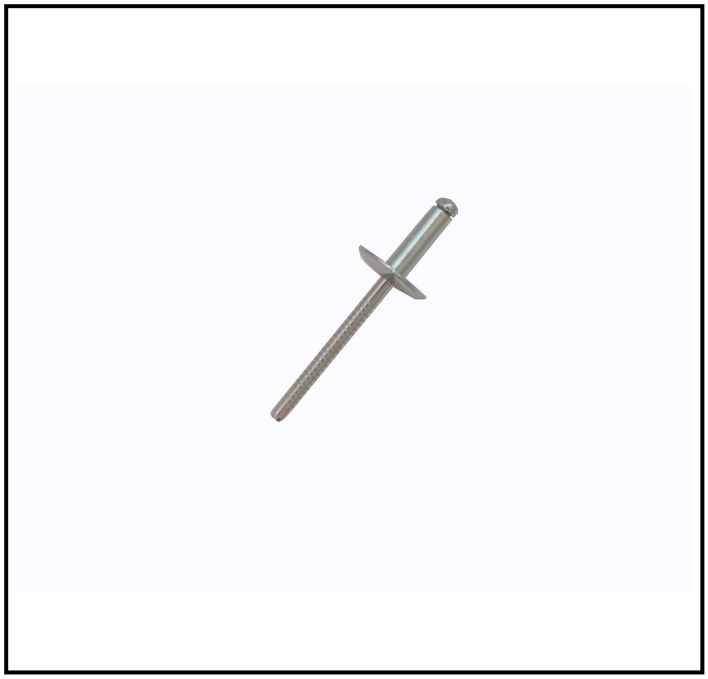

FEATURES

- **Flange Head:** Provides a larger bearing surface for increased load distribution.
- **Stainless Steel Mandrel:** Offers excellent strength and corrosion resistance.
- **Maximum Grip Range:** Accommodates material thicknesses up to 11 mm for versatile use.
- **Minimum Grip Range:** Suitable for material thicknesses starting from 9 mm.
- **Rivet Diameter:** 3.2 mm for precise and secure fastening.
- **Rivet Length:** 14 mm to suit a variety of applications.
- **Compliance:** Meets DIN 7337 and multiple ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. Made from durable stainless steel, this rivet ensures long-lasting performance and resistance to corrosion. Ideal for applications where access is only available from one side, it provides a reliable and efficient solution for joining materials.

General Specifications

Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Stainless Steel
Maximum Grip	11 mm
Minimum Grip	9 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	3.2 mm
Rivet Length	14 mm
Shear Strength	1875 N
Tensile Strength	2360 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

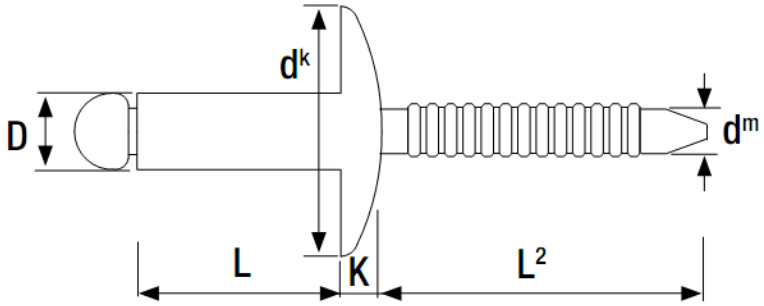



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
	6.0	1.0	3.5	3.3	9.5	1.3	1.90	26.0	1875	2360	1000
	8.0	3.5	5.0	3.3	9.5	1.3	1.90	26.0	1875	2360	1000
3.2	10.0	5.0	7.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	12.0	7.0	9.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	14.0	9.0	11.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	6.0	1.0	2.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	8.0	2.0	4.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
4.0	10.0	4.0	6.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	12.0	6.0	8.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	16.0	10.0	12.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	8.0	2.5	4.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	10.0	4.0	6.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	12.0	6.0	8.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
4.8	14.0	8.0	9.5	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	16.0	9.5	11.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	20.0	12.0	15.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	25.0	16.0	20.0	4.9	16.0	1.7	3.00	28.0	4230	5335	200