
RS PRO Stainless Steel/Stainless Steel Flange Head Blind Rivet, 4.8 mm Diameter x 20 mm long

Supplier Part Number: OJSSL482016

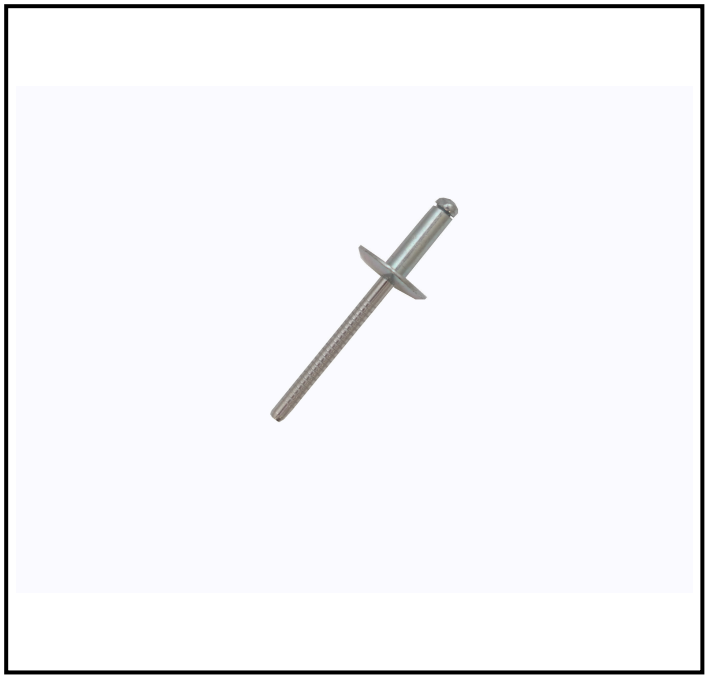

FEATURES

- **Rivet Diameter:** 4.8 mm for precise fitting in standard holes
- **Rivet Length:** 20 mm to accommodate a range of material thicknesses
- **Head Type:** Flange for increased load distribution
- **Mandrel Material:** Stainless Steel for enhanced strength and corrosion resistance
- **Maximum Grip:** 15 mm for versatile application
- **Minimum Grip:** 12 mm to ensure tight fastening
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Blind Rivet is designed for secure fastening in a variety of industrial applications. Made from high-quality stainless steel, this rivet offers excellent corrosion resistance and durability, making it ideal for environments where reliability is crucial.

General Specifications

Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Stainless Steel
Maximum Grip	15 mm
Minimum Grip	12 mm


Mechanical Specifications


Head Diameter	16 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4.8 mm
Rivet Length	20 mm
Shear Strength	4230 N
Tensile Strength	5335 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

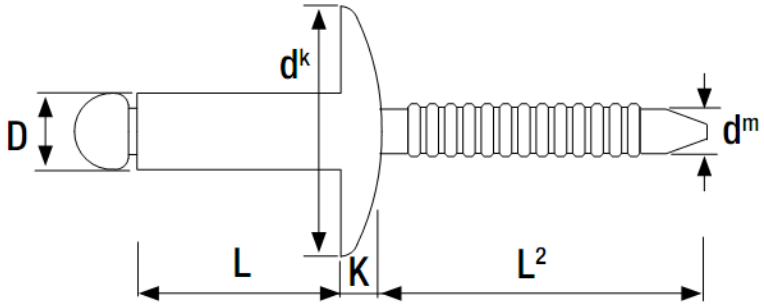



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
	6.0	1.0	3.5	3.3	9.5	1.3	1.90	26.0	1875	2360	1000
	8.0	3.5	5.0	3.3	9.5	1.3	1.90	26.0	1875	2360	1000
3.2	10.0	5.0	7.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	12.0	7.0	9.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	14.0	9.0	11.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	6.0	1.0	2.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	8.0	2.0	4.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
4.0	10.0	4.0	6.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	12.0	6.0	8.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	16.0	10.0	12.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	8.0	2.5	4.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	10.0	4.0	6.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	12.0	6.0	8.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
4.8	14.0	8.0	9.5	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	16.0	9.5	11.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	20.0	12.0	15.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	25.0	16.0	20.0	4.9	16.0	1.7	3.00	28.0	4230	5335	200