
RS PRO Stainless Steel/Stainless Steel Flange Head Blind Rivet, 4.8 mm Diameter x 25 mm long

Supplier Part Number: OJSSL482516

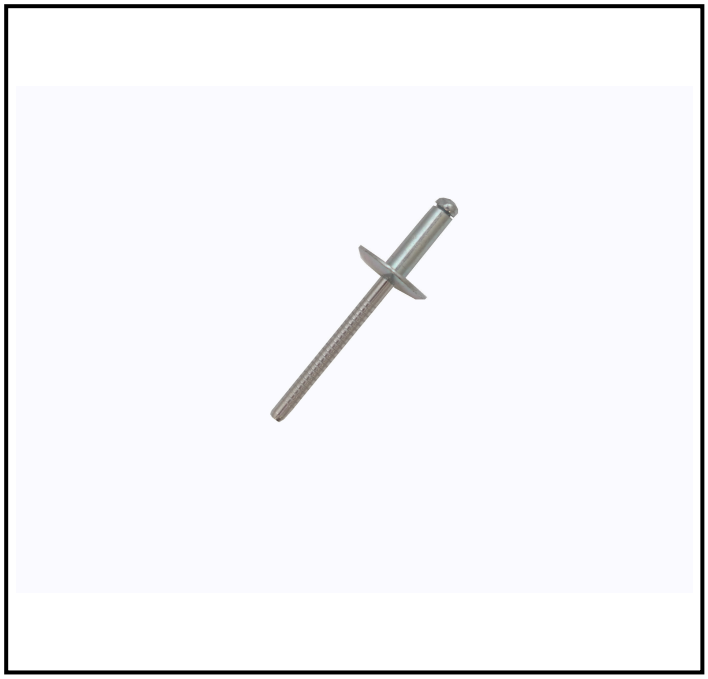

FEATURES

- **Stainless Steel Construction:** Ensures durability and corrosion resistance.
- **Flange Head:** Provides a larger bearing surface for increased load distribution.
- **Blind Rivet Design:** Allows for installation from one side of the workpiece.
- **Wide Grip Range:** Accommodates material thicknesses from 16 mm to 20 mm.
- **Compliance with Standards:** Meets DIN 7337 and multiple ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. Made from durable stainless steel, this rivet provides excellent corrosion resistance and strength. Ideal for applications requiring a reliable and permanent fastening solution.

General Specifications

Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Stainless Steel
Maximum Grip	20 mm
Minimum Grip	16 mm


Mechanical Specifications


Head Diameter	16 mm
Rivet Body Material	Stainless Steel
Rivet Diameter	4.8 mm
Rivet Length	25 mm
Shear Strength	4230 N
Tensile Strength	5335 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

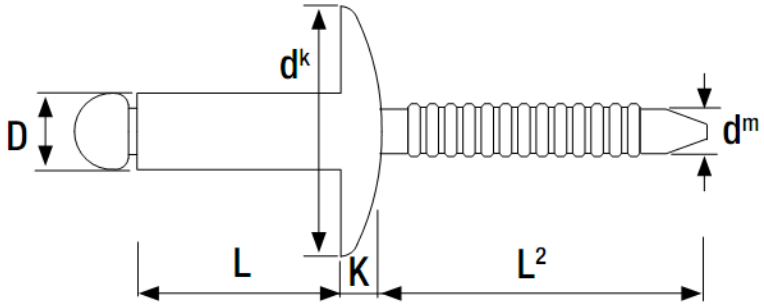



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
	6.0	1.0	3.5	3.3	9.5	1.3	1.90	26.0	1875	2360	1000
	8.0	3.5	5.0	3.3	9.5	1.3	1.90	26.0	1875	2360	1000
3.2	10.0	5.0	7.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	12.0	7.0	9.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	14.0	9.0	11.0	3.3	9.5	1.3	1.90	26.0	1875	2360	500
	6.0	1.0	2.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	8.0	2.0	4.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
4.0	10.0	4.0	6.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	12.0	6.0	8.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	16.0	10.0	12.0	4.1	12.0	1.6	2.50	27.0	2895	3650	500
	8.0	2.5	4.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	10.0	4.0	6.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	12.0	6.0	8.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
4.8	14.0	8.0	9.5	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	16.0	9.5	11.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	20.0	12.0	15.0	4.9	16.0	1.7	3.00	28.0	4230	5335	250
	25.0	16.0	20.0	4.9	16.0	1.7	3.00	28.0	4230	5335	200