
RS PRO Aluminium Flat Head Blind Rivet Nut, M3 x 9mm long

Supplier Part Number: RNAFH0320

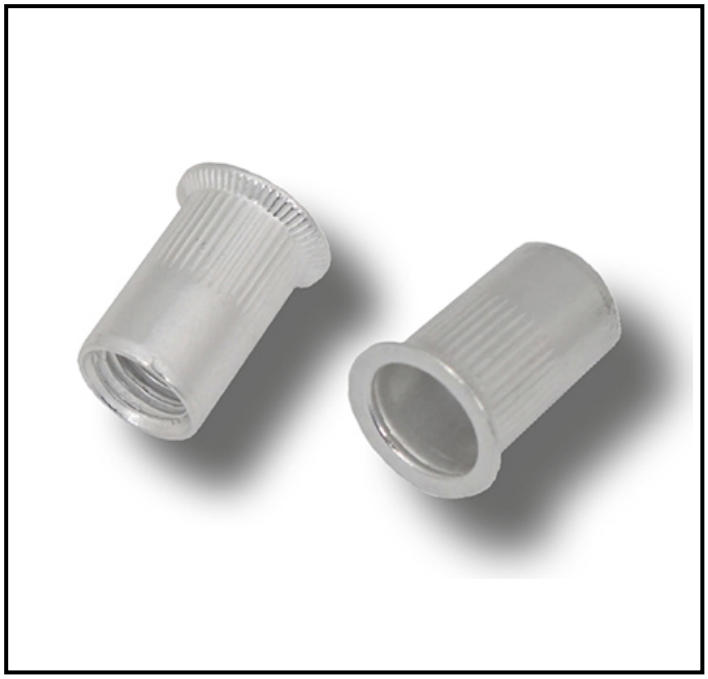

FEATURES

- **Diameter:** 4.9 mm for precise fitting
- **Fixing Hole Diameter:** 5 mm for easy installation
- **Length:** 9 mm for optimal grip range
- **Material:** Aluminium for lightweight and corrosion resistance
- **Thread Size:** M3 for compatibility with standard fasteners

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M3 Aluminium Rivet Nut is designed for secure fastening in various industrial applications. Its lightweight aluminium construction ensures durability and resistance to corrosion, making it ideal for environments where strength and longevity are crucial.


General Specifications


Material	Aluminium
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M3
Fixing Hole Diameter	5 mm
Head Type	Flat


Mechanical Specifications

Diameter	4.9 mm
Length	9 mm
Maximum Grip	1.5 mm
Minimum Grip	0.5 mm
Shear Strength	600 N
Tensile Strength	2500 N
Maximum Tightening Torque	0.7 Nm

Technical Diagrams



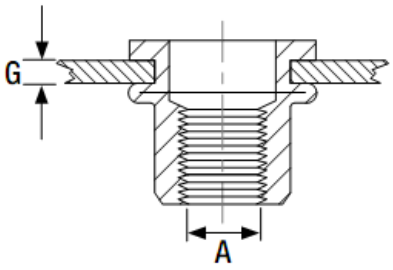



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	8.0	1.0	9.0	0.7	2500	2000
M4	0.5	2.0	6.0	5.9	9.0	1.0	10.5	2.0	3600	1500
	0.5	2.5	6.0	5.9	9.0	1.0	13.0	2.0	3600	1000
M5	5.5	8.0	7.0	6.9	10.0	1.0	20.0	4.0	5500	500
M6	0.5	2.5	9.0	8.9	12.3	1.0	15.0	6.0	8300	500
	2.5	4.5	9.0	8.9	12.3	1.0	19.5	6.0	8300	400
	4.5	6.5	9.0	8.9	12.3	1.0	21.0	6.0	8300	300
M8	1.0	3.0	11.0	10.9	14.5	1.0	16.5	15.0	13000	300
	3.0	5.5	11.0	10.9	14.5	1.0	21.0	15.0	13000	250
	5.5	8.0	11.0	10.9	14.5	1.0	23.5	15.0	13000	200
M10	0.5	4.0	13.0	12.9	16.5	1.6	19.0	27.0	20000	150
	4.0	6.5	13.0	12.9	16.5	1.6	24.0	27.0	20000	100
M12	1.0	4.0	16.0	15.9	22.0	2.0	25.0	45.0	28000	100