
RS PRO Aluminium Flat Head Blind Rivet Nut, M4 x 10.5mm long

Supplier Part Number: RNAFH0420

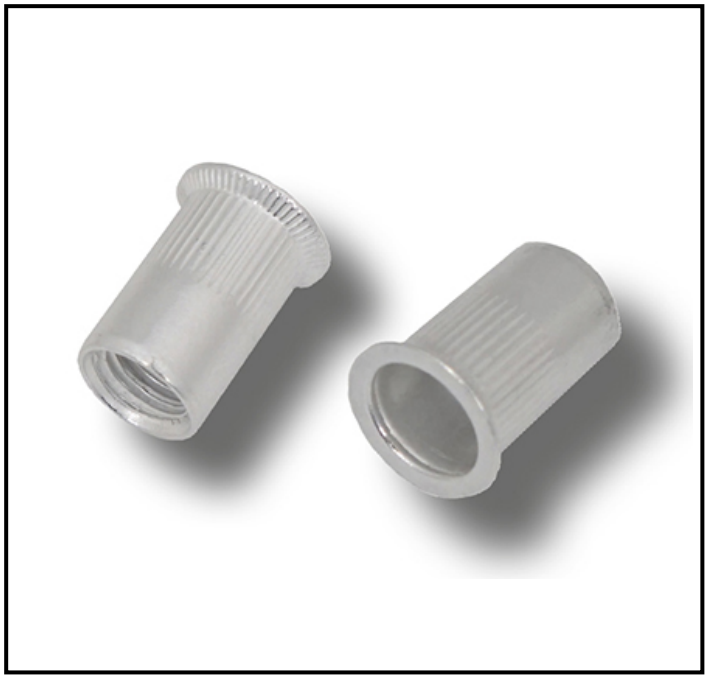

FEATURES

- **Material:** Aluminium provides lightweight and corrosion-resistant properties.
- **Thread Size:** M4 thread size ensures compatibility with a wide range of applications.
- **Fixing Hole Diameter:** 6 mm diameter allows for easy installation in pre-drilled holes.
- **Length:** 10.5 mm length offers a secure fit in thin materials.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M4 Aluminium Rivet Nut is designed for secure fastening in various industrial applications. Made from durable aluminium, this rivet nut provides a reliable solution for creating strong threads in thin materials. Ideal for use in environments where weight reduction is crucial, it offers excellent corrosion resistance.


General Specifications


Material	Aluminium
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M4
Fixing Hole Diameter	6 mm
Head Type	Flat


Mechanical Specifications

Diameter	5.9 mm
Length	10.5 mm
Maximum Grip	2 mm
Minimum Grip	0.5 mm
Shear Strength	1000 N
Tensile Strength	3600 N
Maximum Tightening Torque	2 Nm

Technical Diagrams



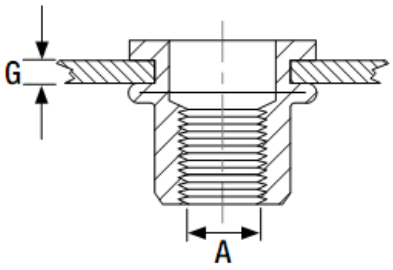



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	8.0	1.0	9.0	0.7	2500	2000
M4	0.5	2.0	6.0	5.9	9.0	1.0	10.5	2.0	3600	1500
	0.5	2.5	6.0	5.9	9.0	1.0	13.0	2.0	3600	1000
M5	5.5	8.0	7.0	6.9	10.0	1.0	20.0	4.0	5500	500
M6	0.5	2.5	9.0	8.9	12.3	1.0	15.0	6.0	8300	500
	2.5	4.5	9.0	8.9	12.3	1.0	19.5	6.0	8300	400
	4.5	6.5	9.0	8.9	12.3	1.0	21.0	6.0	8300	300
M8	1.0	3.0	11.0	10.9	14.5	1.0	16.5	15.0	13000	300
	3.0	5.5	11.0	10.9	14.5	1.0	21.0	15.0	13000	250
	5.5	8.0	11.0	10.9	14.5	1.0	23.5	15.0	13000	200
M10	0.5	4.0	13.0	12.9	16.5	1.6	19.0	27.0	20000	150
	4.0	6.5	13.0	12.9	16.5	1.6	24.0	27.0	20000	100
M12	1.0	4.0	16.0	15.9	22.0	2.0	25.0	45.0	28000	100