
RS PRO Aluminium Flat Head Blind Rivet Nut, M5 x 20mm long

Supplier Part Number: RNAFH0580

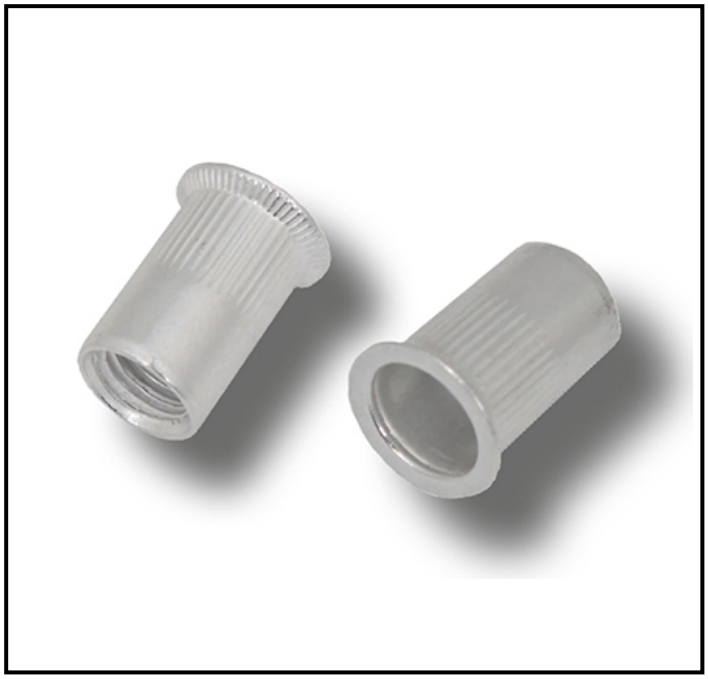

FEATURES

- **Material:** Aluminium construction ensures lightweight and corrosion resistance.
- **Thread Size:** M5 thread size for compatibility with standard M5 bolts.
- **Fixing Hole Diameter:** 7 mm fixing hole diameter for easy installation.
- **Length:** 20 mm length provides a secure fit in various materials.
- **Diameter:** 6.9 mm diameter for precise application.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality M5 Aluminium Rivet Nut designed for secure fastening in various industrial applications. This rivet nut is ideal for providing strong threads in thin materials where a traditional nut and bolt would be impractical.


General Specifications


Material	Aluminium
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M5
Fixing Hole Diameter	7 mm
Head Type	Flat


Mechanical Specifications

Diameter	6.9 mm
Length	20 mm
Maximum Grip	8 mm
Minimum Grip	5.5 mm
Shear Strength	1200 N
Tensile Strength	5500 N
Maximum Tightening Torque	4 Nm

Technical Diagrams



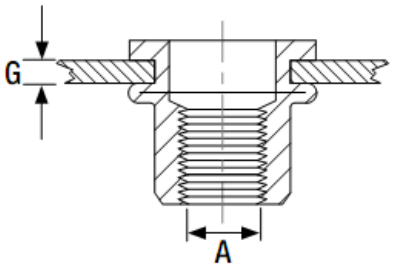



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	8.0	1.0	9.0	0.7	2500	2000
M4	0.5	2.0	6.0	5.9	9.0	1.0	10.5	2.0	3600	1500
	0.5	2.5	6.0	5.9	9.0	1.0	13.0	2.0	3600	1000
M5	5.5	8.0	7.0	6.9	10.0	1.0	20.0	4.0	5500	500
M6	0.5	2.5	9.0	8.9	12.3	1.0	15.0	6.0	8300	500
	2.5	4.5	9.0	8.9	12.3	1.0	19.5	6.0	8300	400
	4.5	6.5	9.0	8.9	12.3	1.0	21.0	6.0	8300	300
M8	1.0	3.0	11.0	10.9	14.5	1.0	16.5	15.0	13000	300
	3.0	5.5	11.0	10.9	14.5	1.0	21.0	15.0	13000	250
	5.5	8.0	11.0	10.9	14.5	1.0	23.5	15.0	13000	200
M10	0.5	4.0	13.0	12.9	16.5	1.6	19.0	27.0	20000	150
	4.0	6.5	13.0	12.9	16.5	1.6	24.0	27.0	20000	100
M12	1.0	4.0	16.0	15.9	22.0	2.0	25.0	45.0	28000	100