
RS PRO Aluminium Flat Head Blind Rivet Nut, M6 x 15mm long

Supplier Part Number: RNAFH0630

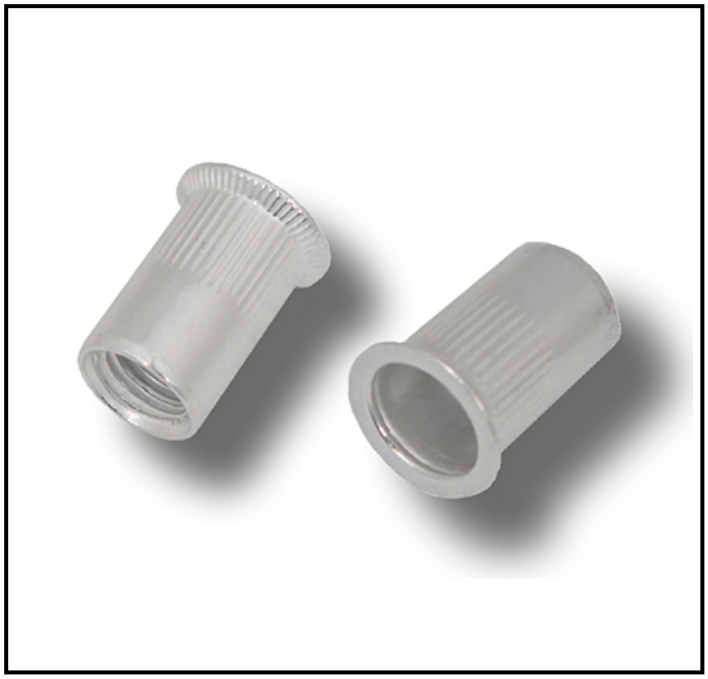

FEATURES

- **Material:** Aluminium construction for lightweight and corrosion-resistant performance
- **Thread Size:** M6 thread size for compatibility with standard bolts and screws
- **Diameter:** 8.9 mm diameter for precise fitting
- **Fixing Hole Diameter:** 9 mm fixing hole diameter for easy installation
- **Length:** 15 mm length for secure and stable fastening

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M6 Aluminium Rivet Nut is designed for secure fastening in a variety of applications. Made from durable aluminium, this rivet nut offers excellent corrosion resistance and is ideal for use in environments where weight reduction is crucial. Its M6 thread size ensures compatibility with a wide range of bolts and screws, providing a reliable and robust fastening solution.


General Specifications


Material	Aluminium
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M6
Fixing Hole Diameter	9 mm
Head Type	Flat


Mechanical Specifications

Diameter	8.9 mm
Length	15 mm
Maximum Grip	2.5 mm
Minimum Grip	0.5 mm
Shear Strength	2000 N
Tensile Strength	8300 N
Maximum Tightening Torque	6 Nm

Technical Diagrams



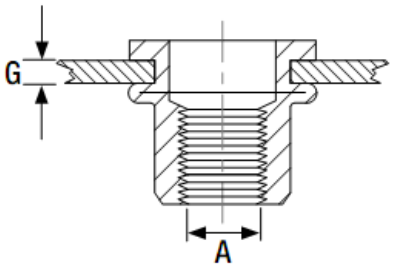



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	8.0	1.0	9.0	0.7	2500	2000
M4	0.5	2.0	6.0	5.9	9.0	1.0	10.5	2.0	3600	1500
	0.5	2.5	6.0	5.9	9.0	1.0	13.0	2.0	3600	1000
M5	5.5	8.0	7.0	6.9	10.0	1.0	20.0	4.0	5500	500
M6	0.5	2.5	9.0	8.9	12.3	1.0	15.0	6.0	8300	500
	2.5	4.5	9.0	8.9	12.3	1.0	19.5	6.0	8300	400
	4.5	6.5	9.0	8.9	12.3	1.0	21.0	6.0	8300	300
M8	1.0	3.0	11.0	10.9	14.5	1.0	16.5	15.0	13000	300
	3.0	5.5	11.0	10.9	14.5	1.0	21.0	15.0	13000	250
	5.5	8.0	11.0	10.9	14.5	1.0	23.5	15.0	13000	200
M10	0.5	4.0	13.0	12.9	16.5	1.6	19.0	27.0	20000	150
	4.0	6.5	13.0	12.9	16.5	1.6	24.0	27.0	20000	100
M12	1.0	4.0	16.0	15.9	22.0	2.0	25.0	45.0	28000	100