
RS PRO Aluminium Flat Head Blind Rivet Nut, M8 x 21mm long

Supplier Part Number: RNAFH0855

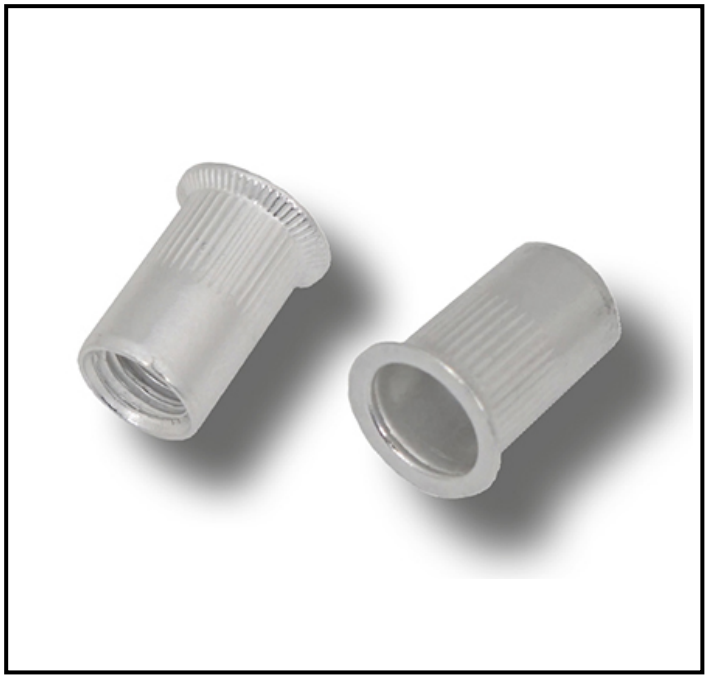

FEATURES

- **Material:** Aluminium construction offers lightweight and corrosion-resistant properties.
- **Thread Size:** M8 thread size ensures compatibility with a wide range of bolts and screws.
- **Diameter:** 10.9 mm diameter for precise fitting in pre-drilled holes.
- **Fixing Hole Diameter:** 11 mm fixing hole diameter allows for easy installation.
- **Length:** 21 mm length provides ample thread engagement for secure fastening.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a robust M8 Aluminium Rivet Nut designed for secure fastening in various industrial applications. This rivet nut provides a reliable solution for creating strong threads in thin materials, ensuring durability and stability.


General Specifications


Material	Aluminium
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Flat


Mechanical Specifications

Diameter	10.9 mm
Length	21 mm
Maximum Grip	5.5 mm
Minimum Grip	3 mm
Shear Strength	2400 N
Tensile Strength	13000 N
Maximum Tightening Torque	15 Nm

Technical Diagrams



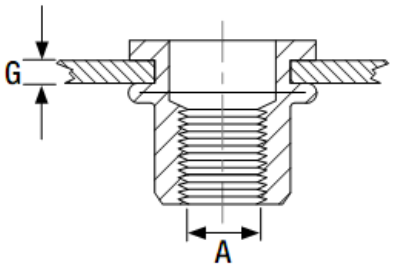



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	8.0	1.0	9.0	0.7	2500	2000
M4	0.5	2.0	6.0	5.9	9.0	1.0	10.5	2.0	3600	1500
	0.5	2.5	6.0	5.9	9.0	1.0	13.0	2.0	3600	1000
M5	5.5	8.0	7.0	6.9	10.0	1.0	20.0	4.0	5500	500
M6	0.5	2.5	9.0	8.9	12.3	1.0	15.0	6.0	8300	500
	2.5	4.5	9.0	8.9	12.3	1.0	19.5	6.0	8300	400
	4.5	6.5	9.0	8.9	12.3	1.0	21.0	6.0	8300	300
M8	1.0	3.0	11.0	10.9	14.5	1.0	16.5	15.0	13000	300
	3.0	5.5	11.0	10.9	14.5	1.0	21.0	15.0	13000	250
	5.5	8.0	11.0	10.9	14.5	1.0	23.5	15.0	13000	200
M10	0.5	4.0	13.0	12.9	16.5	1.6	19.0	27.0	20000	150
	4.0	6.5	13.0	12.9	16.5	1.6	24.0	27.0	20000	100
M12	1.0	4.0	16.0	15.9	22.0	2.0	25.0	45.0	28000	100