
RS PRO Aluminium Flat Head Blind Rivet Nut, M8 x 23.5mm long

Supplier Part Number: RNAFH0880

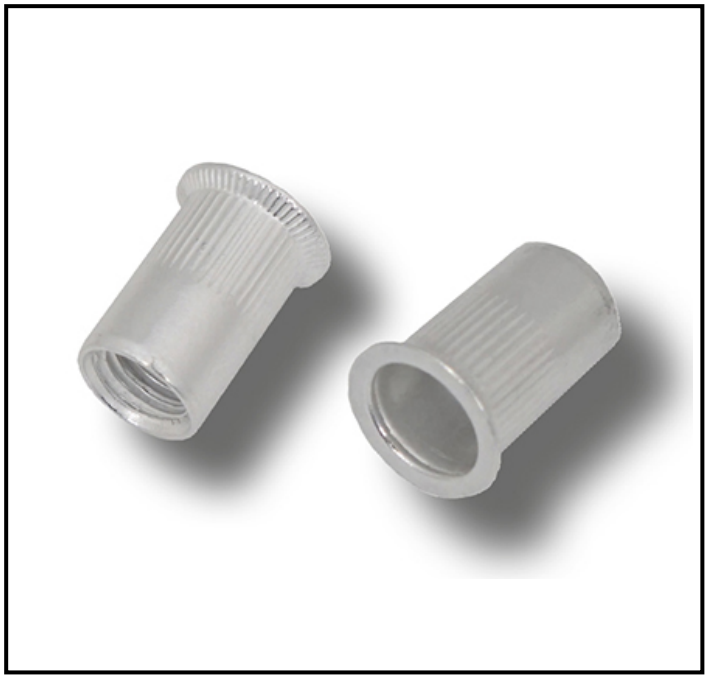

FEATURES

- **Material:** Aluminium construction ensures lightweight and corrosion-resistant performance.
- **Thread Size:** M8 thread size for compatibility with standard fasteners.
- **Fixing Hole Diameter:** 11 mm fixing hole diameter for easy installation.
- **Diameter:** 10.9 mm diameter for a secure fit.
- **Length:** 23.5 mm length provides stability and strength.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M8 Aluminium Rivet Nut is designed for secure fastening in a variety of industrial applications. This rivet nut offers a reliable solution for creating strong threads in thin materials, providing a durable and lightweight fastening option.


General Specifications


Material	Aluminium
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M8
Fixing Hole Diameter	11 mm
Head Type	Flat


Mechanical Specifications

Diameter	10.9 mm
Length	23.5 mm
Maximum Grip	8 mm
Minimum Grip	5.5 mm
Shear Strength	2400 N
Tensile Strength	13000 N
Maximum Tightening Torque	15 Nm

Technical Diagrams



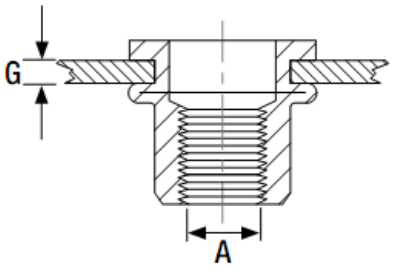



Thread Size mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity
A	G	G		B	H	T	L			
M3	0.5	1.5	5.0	4.9	8.0	1.0	9.0	0.7	2500	2000
M4	0.5	2.0	6.0	5.9	9.0	1.0	10.5	2.0	3600	1500
	0.5	2.5	6.0	5.9	9.0	1.0	13.0	2.0	3600	1000
M5	5.5	8.0	7.0	6.9	10.0	1.0	20.0	4.0	5500	500
M6	0.5	2.5	9.0	8.9	12.3	1.0	15.0	6.0	8300	500
	2.5	4.5	9.0	8.9	12.3	1.0	19.5	6.0	8300	400
	4.5	6.5	9.0	8.9	12.3	1.0	21.0	6.0	8300	300
M8	1.0	3.0	11.0	10.9	14.5	1.0	16.5	15.0	13000	300
	3.0	5.5	11.0	10.9	14.5	1.0	21.0	15.0	13000	250
	5.5	8.0	11.0	10.9	14.5	1.0	23.5	15.0	13000	200
M10	0.5	4.0	13.0	12.9	16.5	1.6	19.0	27.0	20000	150
	4.0	6.5	13.0	12.9	16.5	1.6	24.0	27.0	20000	100
M12	1.0	4.0	16.0	15.9	22.0	2.0	25.0	45.0	28000	100